

MMIC Surface Mount Power Splitter/Combiner

WP4C1+

4 Way-0° 50Ω 800 to 1150 MHz



Generic photo used for illustration purposes only
CASE STYLE: DQ1225


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-65°C to 150°C
Power Input (as a splitter)	1.5W max.
Internal Dissipation	0.375W max.
Permanent damage may occur if any of these limits are exceeded.	


Pad Connections

SUM PORT	2
PORT 1	12
PORT 2	10
PORT 3	6
PORT 4	4
GROUND	1,3,5,7,8,9,11, paddle

Product Marking




Outline Drawing

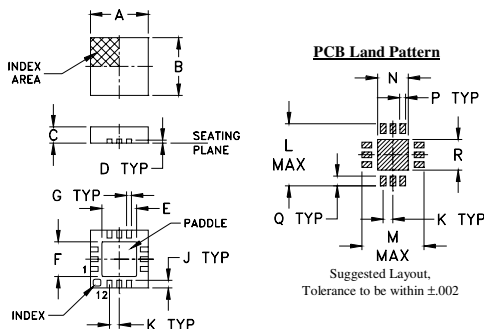

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.118	.118	.035	.008	.057	.057	.009	---	.016
3.00	3.00	0.89	0.20	1.45	1.45	0.23	---	0.41
K	L	M	N	P	Q	R	wt	
.020	.127	.127	.049	.010	.020	.049	grams	
0.51	3.23	3.23	1.24	0.25	0.51	1.24	0.02	

Demo Board MCL P/N: TB-395+ Suggested PCB Layout (PL-259)

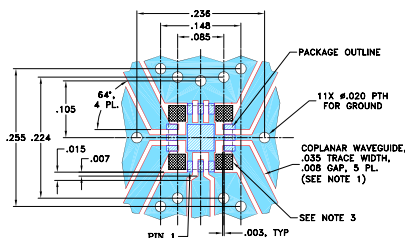

- NOTES:
- TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
 - SIGNAL TRACES ARE NOT ALLOWED INSIDE HATCHED AREAS (APPROX. .030 X .030) AT 4 PLACES AS SHOWN.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/WCLStore/terms.jsp

Features

- low insertion loss, 0.7 dB typ.
- excellent isolation, 22 dB typ.
- good phase unbalance, 0.6 deg. typ.
- good amplitude unbalance, 0.2 dB typ.
- small size, .118" x .118" x .035"
- high ESD level
- aqueous washable

Applications

- cellular
- WCDMA
- GSM
- radar




Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 6.0 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)	VSWR (:1) Typ.	
	Typ.	Min.	Typ.	Max.			Port S	Ports 1,2,3,4
800-1150	22	15	0.7	1.6	4	0.5	1.5	1.4

Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)				Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3	VSWR 4
	S-1	S-2	S-3	S-4		1-2	2-3	3-4						
800.00	6.94	7.11	7.07	6.91	0.20	22.93	21.76	23.38	0.75	1.52	1.43	1.43	1.43	1.42
820.00	6.84	7.02	6.97	6.82	0.20	23.34	22.19	23.78	0.66	1.42	1.42	1.41	1.42	1.40
830.00	6.81	6.98	6.93	6.78	0.20	23.46	22.35	23.89	0.62	1.38	1.41	1.41	1.41	1.40
850.00	6.74	6.91	6.86	6.71	0.19	23.53	22.52	23.93	0.54	1.31	1.40	1.40	1.39	1.38
860.00	6.71	6.88	6.83	6.68	0.19	23.48	22.54	23.86	0.50	1.29	1.39	1.39	1.39	1.38
890.00	6.66	6.82	6.77	6.62	0.20	23.11	22.36	23.39	0.38	1.25	1.37	1.37	1.37	1.36
900.00	6.64	6.80	6.75	6.61	0.19	22.93	22.23	23.18	0.34	1.25	1.37	1.37	1.37	1.36
930.00	6.62	6.78	6.73	6.59	0.19	22.29	21.74	22.45	0.33	1.27	1.36	1.35	1.35	1.35
950.00	6.62	6.77	6.72	6.58	0.19	21.82	21.34	21.94	0.31	1.31	1.35	1.34	1.34	1.34
960.00	6.62	6.77	6.72	6.58	0.19	21.59	21.14	21.69	0.32	1.33	1.35	1.34	1.34	1.33
990.00	6.63	6.78	6.72	6.59	0.19	20.91	20.53	20.97	0.37	1.40	1.34	1.33	1.33	1.33
1000.00	6.64	6.78	6.73	6.60	0.18	20.70	20.33	20.74	0.40	1.43	1.34	1.33	1.32	1.33
1050.00	6.69	6.83	6.76	6.64	0.18	19.73	19.38	19.71	0.57	1.56	1.33	1.32	1.31	1.32
1100.00	6.76	6.88	6.82	6.71	0.17	18.91	18.56	18.86	0.73	1.70	1.33	1.31	1.30	1.31
1150.00	6.83	6.95	6.88	6.78	0.17	18.23	17.86	18.16	0.90	1.83	1.33	1.31	1.30	1.32

1. Total Loss = Insertion Loss + 6dB splitter loss.

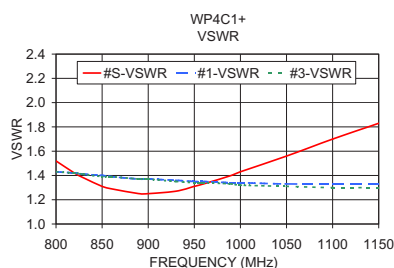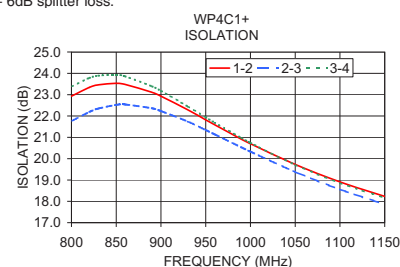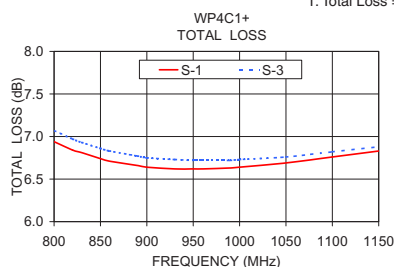

electrical schematic



ESD Rating

Human Body Model (HBM): Class 1A (250 to < 500V) in accordance with ANSI/ESD STM 5.1 - 2001
Machine Model (MM): Class M2 (100V to < 250V) in accordance with ANSI/ESD STM 5.2 - 1999



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Signal Conditioning](#) category:

Click to view products by [Mini-Circuits](#) manufacturer:

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#)
[FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#)
[C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#)
[LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#)
[PD0922J5050D2HF](#) [1E1305-3](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [TP-102-PIN](#) [TP-103-PIN](#) [BD1222J50200AHF](#)