

# Power Splitter/Combiner

## Z99SC-62+

2 Way-0° 50Ω 0.5 to 600 MHz



CASE STYLE: F183

Connectors	Model
SMA	Z99SC-62-S+

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.125W max.

Permanent damage may occur if any of these limits are exceeded.

### Coaxial Connections

SUM PORT	S
PORT 1	1
PORT 2	2

### Outline Drawing

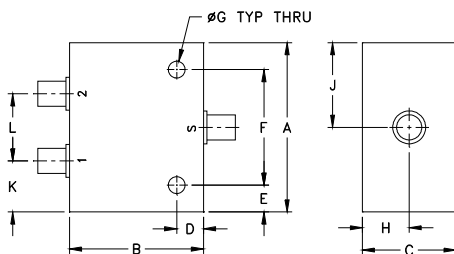

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	
1.26	1.00	.70	.200	.200	.860	.125	
32.00	25.40	17.78	5.08	5.08	21.84	3.18	
H	J	K	L				wt
.35	.63	.38	.50				grams
8.89	16.00	9.65	12.70				24.0

### Electrical Schematic



### Features

- wideband, 0.5 to 600 dB typ.
- high isolation, 28 dB typ.
- excellent amplitude unbalance, 0.1 dB typ.
- excellent phase unbalance, 0.2 deg. typ.
- rugged shielded case

### Applications

- UHF
- instrumentation
- communication systems




### Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
<b>Frequency Range</b>		0.5		600	MHz
<b>Insertion Loss Above 3.0 dB</b>	0.5-5	—	0.3	0.6	
	5-300	—	0.5	0.8	dB
<b>Isolation</b>	300-600	—	0.7	1.4	
	0.5-5	18	25	—	
<b>Phase Unbalance</b>	5-300	16	20	—	dB
	300-600	12	16	—	
<b>Amplitude Unbalance</b>	0.5-5	—	0.2	1	Degree
	5-300	—	0.1	1	
<b>VSWR (Port S)</b>	300-600	—	0.2	2	
	0.5-5	—	0.01	0.1	
<b>VSWR (Port 1-2)</b>	5-300	—	0.01	0.2	dB
	300-600	—	0.05	0.3	
<b>VSWR (Port S)</b>	0.5-5	—	1.1	1.4	:1
	5-300	—	1.2	1.4	
<b>VSWR (Port 1-2)</b>	300-600	—	1.4	1.6	
	0.5-5	—	1.2	1.5	:1
<b>VSWR (Port 1-2)</b>	5-300	—	1.1	1.2	
	300-600	—	1.15	1.3	

### Typical Performance Data

Frequency (MHz)	Total Loss <sup>1</sup> (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
0.50	3.21	3.20	0.01	25.60	0.20	1.15	1.26	1.25
0.90	3.21	3.21	0.00	28.66	0.10	1.10	1.16	1.15
1.00	3.21	3.20	0.00	29.13	0.08	1.10	1.15	1.14
4.00	3.16	3.16	0.00	33.97	0.02	1.06	1.06	1.06
5.00	3.16	3.15	0.00	34.54	0.02	1.06	1.06	1.06
10.00	3.15	3.15	0.00	34.87	0.01	1.05	1.04	1.04
50.00	3.19	3.19	0.00	31.17	0.01	1.06	1.04	1.04
100.00	3.23	3.24	0.00	27.52	0.01	1.08	1.03	1.03
300.00	3.41	3.42	0.01	19.92	0.06	1.21	1.03	1.02
500.00	3.61	3.63	0.02	16.63	0.07	1.34	1.10	1.11
550.00	3.67	3.70	0.03	16.13	0.06	1.37	1.13	1.13
600.00	3.72	3.76	0.03	15.74	0.05	1.40	1.15	1.16

1. Total Loss = Insertion Loss + 3dB splitter loss.

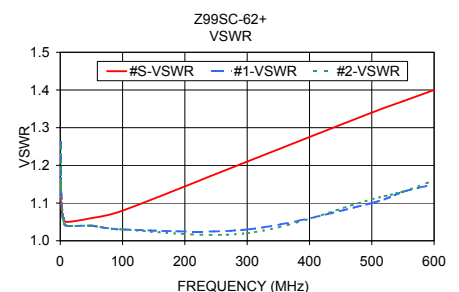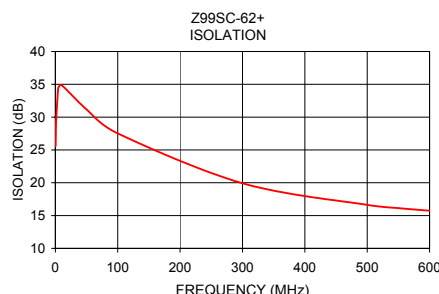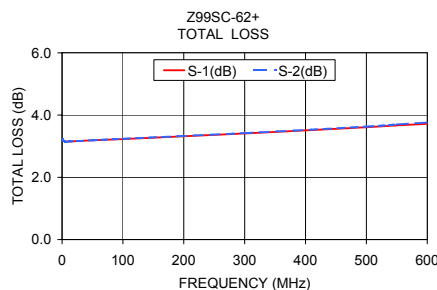

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Signal Conditioning](#) category:*

*Click to view products by [Mini-Circuits](#) manufacturer:*

Other Similar products are found below :

[MAPDCC0001](#) [MAPDCC0004](#) [PD0409J5050S2HF](#) [880157](#) [HHS-109-PIN](#) [DC1417J5005AHF](#) [AFS14A30-2185.00-T3](#) [AFS14A35-1591.50-T3](#) [DS-323-PIN](#) [B39321R801H210](#) [1A0220-3](#) [JP510S](#) [LFB212G45SG8C341](#) [LFB322G45SN1A504](#) [LFL182G45TC3B746](#) [SF2159E](#) [30057](#) [FM-104-PIN](#) [CER0813B](#) [MAPDCC0005](#) [3A325](#) [40287](#) [41180](#) [ATB3225-75032NCT](#) [BD0810N50100AHF](#) [BD2425J50200AHF](#) [C5060J5003AHF](#) [JHS-115-PIN](#) [JP503AS](#) [DC0710J5005AHF](#) [DC2327J5005AHF](#) [DC3338J5005AHF](#) [43020](#) [LFB2H2G60BB1C106](#) [LFL15869MTC1B787](#) [X3C19F1-20S](#) [XC3500P-20S](#) [10013-20](#) [SF2194E](#) [CDBLB455KCAX39-B0](#) [TGL2208-SM, EVAL](#) [RF1353C](#) [PD0922J5050D2HF](#) [1E1305-3](#) [1G1304-30](#) [B0922J7575AHF](#) [2020-6622-20](#) [TP-102-PIN](#) [TP-103-PIN](#) [BD1222J50200AHF](#)