

# Coaxial Amplifier

## ZX60-100VH+

50Ω Medium High Power 0.3 to 100 MHz

### The Big Deal

- Miniature Shielded Rugged Case
- Wide frequency range
- Excellent Gain Flatness



### Product Overview

This product could be used as a driver amplifier with 1W typical output power. The gain of this amplifier has an excellent flatness over a very wide frequency range. This amplifier has a high dynamic range and therefore can be used as RF front end or IF amplifier.

Feature	Advantages
Frequency range: 0.3-100MHz	Covers HF and partially VHF frequency bands, could be used in FM broadcast up to 110MHz. Great for the radio amateur enthusiasts.
Excellent Gain Flatness: +/- 0.3dB, typ.	Excellent gain flatness minimizes distortion of amplified signals, including multi-tone, complex modulation, very wide frequency range and noise-like signals
Output Power 1W (+30dBm, typ)	High output power in very small package
Noise Figure	Low noise figure, 4dB typ. and high OIP3, +43dBm typ. defines the high dynamic range of the amplifier.

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Coaxial Amplifier

## ZX60-100VH+

50Ω Medium High Power 0.3 to 100 MHz

### Features

- single +12V operation
- wide bandwidth, 0.3 to 100 MHz, usable to 110 MHz
- excellent gain flatness:  $\pm 0.3$  dB, typ.
- low noise figure, 4 dB typ.
- output power, up to +30 dBm typ.
- small size

### Applications

- buffer amplifier
- driver amplifier
- HF communication
- lab
- instrumentation
- test equipment

### Product Description


ZX60-100VH+ is a Class-A, high dynamic range, unconditionally stable amplifier. It features a very small ruggedized case, the ability to withstand accidental open or short at output and reverse bias protection for added reliability under difficult conditions.

### Electrical Specifications at 25°C

Parameter	Condition (MHz)	ZX60-100VH+ ▲ ZX60-100VHX+			Units
		Min.	Typ.	Max.	
Frequency Range		0.3	—	100	MHz
Gain	0.3-100	33	36	—	dB
Gain Flatness	0.3-100	—	$\pm 0.3$	—	dB
Output Power at 1dB compression	0.3-100	—	+30	—	dBm
Output third order intercept point	0.3-100	—	+43	—	dBm
Noise Figure	10-100	—	4	—	dB
Input VSWR	0.3-100	—	1.6	—	:1
Output VSWR	0.3-100	—	1.5	—	:1
Active Directivity (Isolation-Gain)	0.3-100	—	14	—	dB
DC Supply Voltage		—	12*	—	V
Supply Current		—	320	370	mA

\* Recommended Operating Voltage.

▲Heat sink not included. Alternative heat sinking and heat removal must be provided by the user to limit maximum base-plate temperature to 85°C, in order to ensure proper performance. For reference, this requires thermal resistance of user's external heat sink to be 3.3°C/W max.

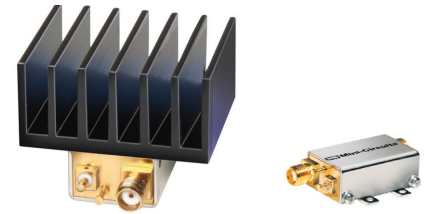

Model No.	ZX60-100VH+	▲ ZX60-100VHX+
Case Style	MM1750	GA955
Connectors	SMA	

#### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Maximum Ratings

Parameter	Ratings
Operating Temperature (base plate)	-40°C to 85°C
Storage Temperature	-55°C to 100°C
DC Voltage	13V
Input RF Power (no damage)	+15 dBm
Power Dissipation	4.4W


Permanent damage may occur if any of these limits are exceeded.

#### Notes


- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



## Outline Drawing for models with heatsink

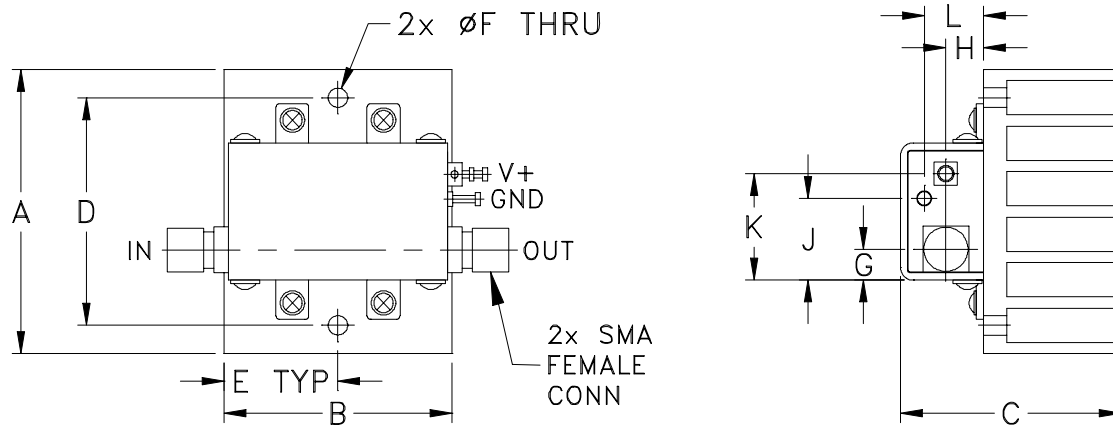

## Outline Drawing for models without heatsink

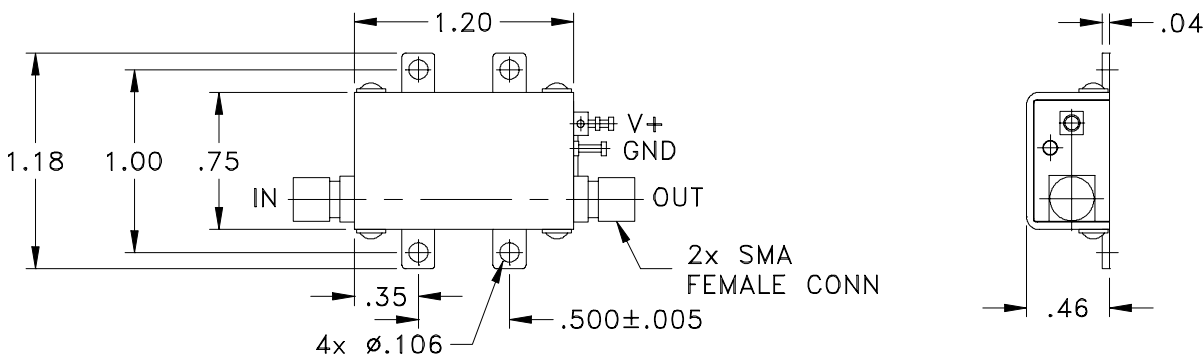

**!** NOTE: When soldering the DC connections, caution must be used to avoid overheating the DC terminal. See Application Note. [AN-40-010](#).

## Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	wt*
1.560	1.25	1.21	1.25	0.63	0.106	0.17	0.21	0.45	0.59	0.33	grams
39.62	31.75	30.73	31.75	16.00	2.69	4.32	5.33	11.43	14.99	8.38	61.4







\*35.0 grams without heatsink

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



FREQUENCY (MHz)	GAIN (dB)	DIRECTIVITY (dB)	VSWR (:1)		POUT at 1 dB COMPR. (dBm)	NOISE FIGURE (dB)	IP3 (dBm)
	12V	12V	IN	OUT	12V	12V	12V
0.30	36.67	19.01	1.14	1.46	29.87	—	40.86
0.50	36.76	19.59	1.15	1.30	30.05	—	42.65
1.00	36.80	18.86	1.16	1.25	30.16	—	44.39
5.00	36.51	18.03	1.28	1.43	30.26	—	44.51
10.00	36.35	16.46	1.45	1.54	30.27	4.14	43.98
15.00	36.40	14.68	1.57	1.56	30.18	4.03	43.65
20.00	36.44	14.52	1.63	1.53	30.11	4.05	43.45
30.00	36.53	13.71	1.66	1.47	29.99	3.98	43.33
40.00	36.61	13.48	1.63	1.39	29.98	3.99	43.23
50.00	36.66	13.42	1.57	1.31	30.04	3.97	43.21
60.00	36.69	13.28	1.49	1.24	29.96	3.89	43.21
70.00	36.69	12.84	1.41	1.18	29.71	3.92	43.11
80.00	36.65	12.98	1.34	1.15	29.34	3.93	42.94
90.00	36.54	13.45	1.27	1.11	28.98	3.95	42.64
100.00	36.36	13.69	1.21	1.06	28.70	3.96	42.38

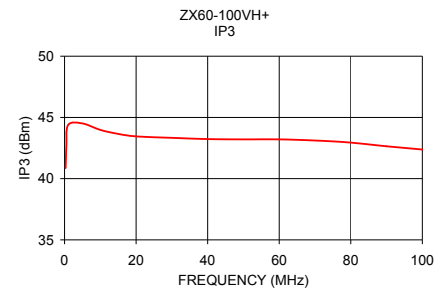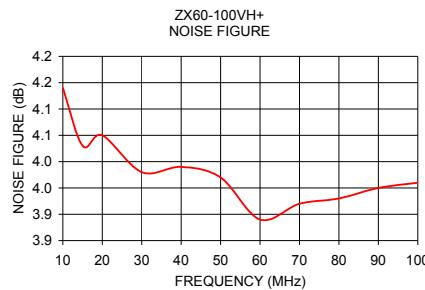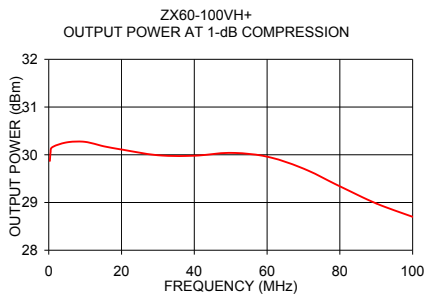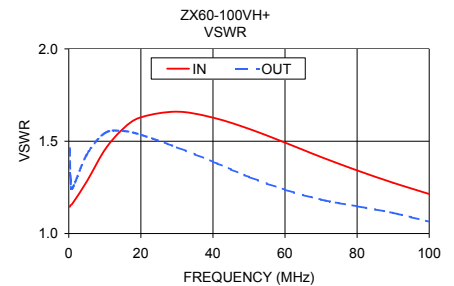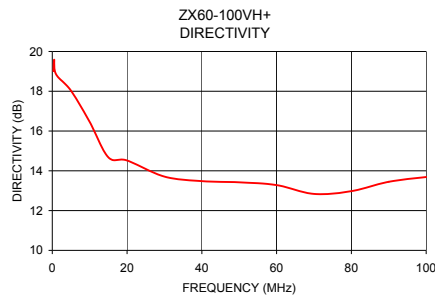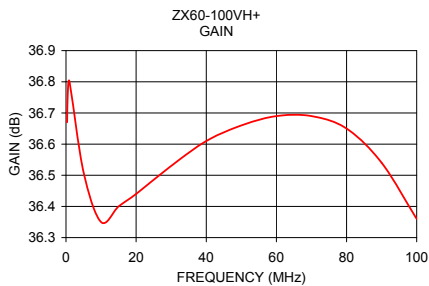

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Amplifier](#) category:*

*Click to view products by [Mini-Circuits](#) manufacturer:*

Other Similar products are found below :

[A82-1](#) [BGA622H6820XTSA1](#) [BGA 728L7 E6327](#) [BGB719N7ESDE6327XTMA1](#) [HMC397-SX](#) [HMC405](#) [HMC561-SX](#) [HMC8120-SX](#)  
[HMC8121-SX](#) [HMC-ALH382-SX](#) [HMC-ALH476-SX](#) [SE2433T-R](#) [SMA3101-TL-E](#) [SMA39](#) [A66-1](#) [A66-3](#) [A67-1](#) [LX5535LQ](#) [LX5540LL](#)  
[MAAM02350](#) [HMC3653LP3BETR](#) [HMC549MS8GETR](#) [HMC-ALH435-SX](#) [SMA101](#) [SMA32](#) [SMA411](#) [SMA531](#) [SST12LP17E-XX8E](#)  
[SST12LP19E-QX6E](#) [WPM0510A](#) [HMC5929LS6TR](#) [HMC5879LS7TR](#) [HMC1126](#) [HMC1087F10](#) [HMC1086](#) [HMC1016](#) [SMA1212](#)  
[MAX2689EWS+T](#) [MACS-007802-0M1RS0](#) [MAAMSS0041TR](#) [MAAM37000-A1G](#) [CHA5115-QDG](#) [SMA70-2](#) [SMA4011](#) [A231](#) [HMC-](#)  
[AUH232](#) [LX5511LQ](#) [LX5511LQ-TR](#) [HMC7441-SX](#) [HMC-ALH310](#)