

# Low Noise Amplifier

ZX60-272LN+

50Ω 2300 to 2700 MHz

### Features

- Ultra low noise figure, 0.8 dB typ.
- Output power, up to +18.5 dBm typ.
- Good output IP3, 31.5 dBm typ.
- Good return loss
- Unconditionally stable
- Protected by US patent 6,790,049

### Applications

- WiMAX 2.5GHz
- Base transceiver station, tower mounted amplifier, repeater
- General purpose low noise amplifier
- Lab
- Instrumentation
- Test equipment




Case Style:GA955  
 Connectors Model  
**SMA** ZX60-272LN-S+

**+RoHS Compliant**  
 The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Electrical Specifications at 25°C

Parameter	Condition (MHz)	Min.	Typ.	Max.	Units
Frequency Range		2300		2700	MHz
Noise Figure	2300-2700		0.8	1.1	dB
Gain	2300-2700	11.5	14.0		dB
Gain Flatness	2300-2700		± 0.55	± 1.1	dB
Output Power at 1dB compression	2300-2700	16.0	18.5		dBm
Output third order intercept point (OIP3)	2300-2700		31.5		dBm
Input VSWR	2300-2700		1.2		:1
Output VSWR	2300-2700		1.6		:1
Active Directivity	2300-2700		7		dB
DC Supply Voltage			5.0		V
Supply Current			55	70	mA

### Outline Drawing

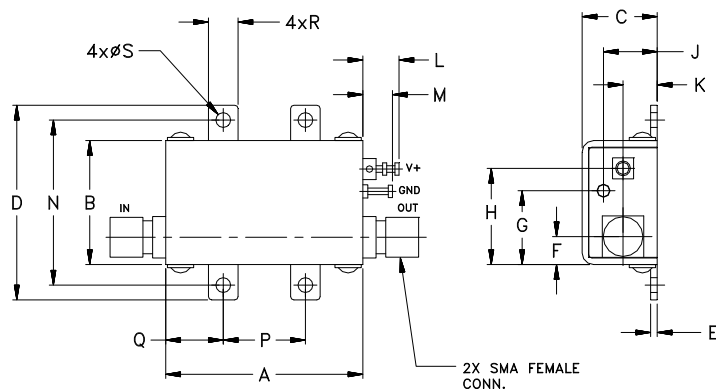

**!** NOTE: When soldering the DC connections, caution must be used to avoid overheating the DC terminals. See Application Note AN-40-10.

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	wt.
1.20	.75	.46	1.18	.04	.17	.45	.59	.33	.21	.22	.18	1.00	.50	.35	.18	.106	grams
30.48	19.05	11.68	29.97	1.02	4.32	11.43	14.99	8.38	5.33	5.59	4.57	25.40	12.70	8.89	4.57	2.69	35.0

#### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)









### Maximum Ratings

Parameter	Ratings
Operating Temperature	-40°C to 85°C Case
Storage Temperature	-55°C to 100°C
DC Voltage	5.5 V
Input RF Power (no damage)	+17 dBm
Power Consumption	400 mW

Permanent damage may occur if any of these limits are exceeded.

FREQUENCY (MHz)	GAIN (dB)	DIRECTIVITY (dB)	VSWR IN (:1)	VSWR OUT (:1)	POWER OUT @ 1dB COMPRESSION (dBm)	OUTPUT IP3 (dBm)	NF (dB)
2300.00	14.47	7.12	1.31	1.69	18.24	31.83	0.74
2320.00	14.41	7.08	1.29	1.69	18.29	31.42	0.69
2340.00	14.35	7.08	1.27	1.69	18.06	31.78	0.69
2360.00	14.30	7.07	1.26	1.69	18.05	32.10	0.70
2380.00	14.25	7.01	1.24	1.68	18.26	30.83	0.72
2400.00	14.19	7.01	1.23	1.67	18.24	31.89	0.74
2420.00	14.14	7.00	1.21	1.66	18.24	32.98	0.74
2440.00	14.09	6.96	1.19	1.66	18.31	29.71	0.76
2460.00	14.04	6.97	1.17	1.66	18.34	30.51	0.82
2480.00	13.98	6.95	1.16	1.65	18.36	34.00	0.71
2500.00	13.93	6.93	1.15	1.63	18.44	30.84	0.77
2520.00	13.88	6.91	1.13	1.62	18.55	30.31	0.80
2540.00	13.82	6.90	1.12	1.61	18.54	30.79	0.83
2560.00	13.77	6.89	1.11	1.60	18.66	31.57	0.79
2580.00	13.71	6.89	1.11	1.59	18.72	31.01	0.75
2600.00	13.65	6.90	1.11	1.58	18.79	31.36	0.81
2620.00	13.60	6.88	1.11	1.56	18.85	31.41	0.76
2640.00	13.55	6.87	1.12	1.54	18.90	30.90	0.75
2680.00	13.43	6.89	1.15	1.52	19.14	30.29	0.80
2700.00	13.36	6.92	1.17	1.51	19.24	31.47	0.75

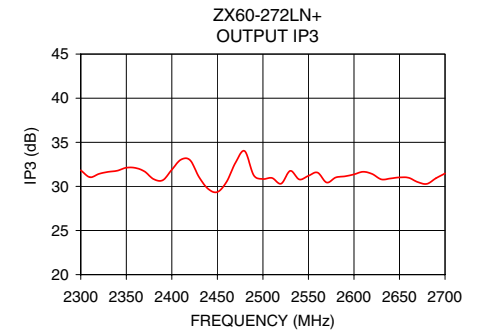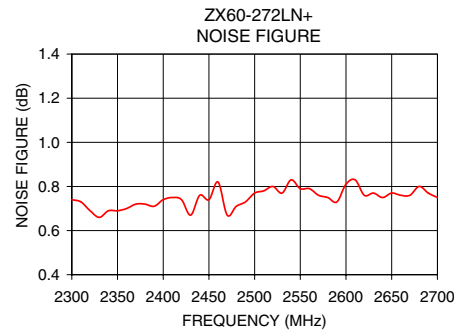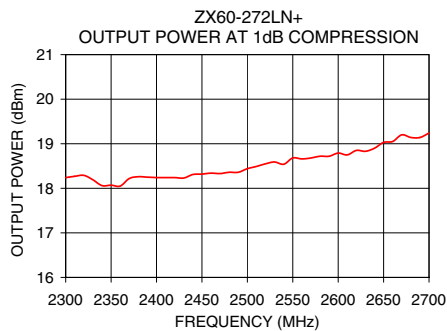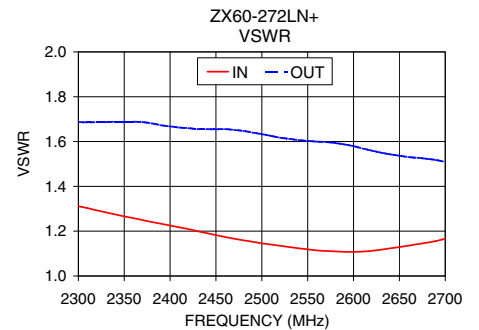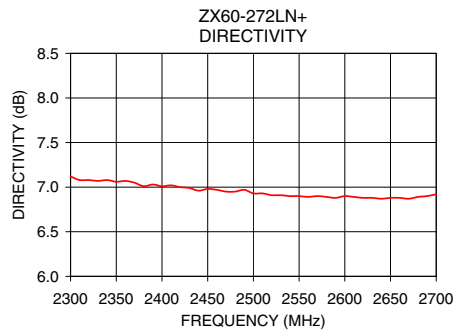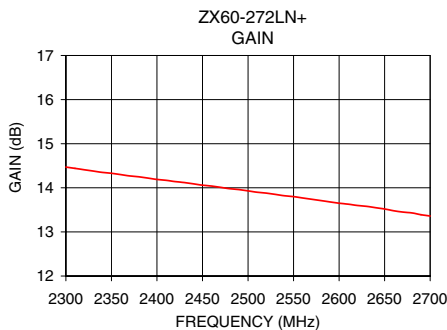

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Amplifier](#) category:*

*Click to view products by [Mini-Circuits](#) manufacturer:*

Other Similar products are found below :

[A82-1](#) [BGA622H6820XTSA1](#) [BGA 728L7 E6327](#) [BGB719N7ESDE6327XTMA1](#) [HMC397-SX](#) [HMC405](#) [HMC561-SX](#) [HMC8120-SX](#)  
[HMC8121-SX](#) [HMC-ALH382-SX](#) [HMC-ALH476-SX](#) [SE2433T-R](#) [SMA3101-TL-E](#) [SMA39](#) [A66-1](#) [A66-3](#) [A67-1](#) [LX5535LQ](#) [LX5540LL](#)  
[MAAM02350](#) [HMC3653LP3BETR](#) [HMC549MS8GETR](#) [HMC-ALH435-SX](#) [SMA101](#) [SMA32](#) [SMA411](#) [SMA531](#) [SST12LP17E-XX8E](#)  
[SST12LP19E-QX6E](#) [WPM0510A](#) [HMC5929LS6TR](#) [HMC5879LS7TR](#) [HMC1126](#) [HMC1087F10](#) [HMC1086](#) [HMC1016](#) [SMA1212](#)  
[MAX2689EWS+T](#) [MACS-007802-0M1RS0](#) [MAAMSS0041TR](#) [MAAM37000-A1G](#) [CHA5115-QDG](#) [SMA70-2](#) [SMA4011](#) [A231](#) [HMC-](#)  
[AUH232](#) [LX5511LQ](#) [LX5511LQ-TR](#) [HMC7441-SX](#) [HMC-ALH310](#)