

PNP SILICON TRANSISTOR


■ 主要用途

音频放大、开关功率放大

■ 外形尺寸及引脚排列

■ 极限值 (T_a=25℃)

T _{stg}	— 贮存温度.....	-55~150℃
T _j	— 结温.....	150℃
P _C	— 集电极功率耗散 (T _c =25℃)	10W
P _C	— 集电极功率耗散 (T _A =25℃)	1W
V _{CB0}	— 集电极—基极电压.....	-40V
V _{CE0}	— 集电极—发射极电压.....	-30V
V _{EB0}	— 发射极—基极电压.....	-5V
I _C	— 集电极电流.....	-3A
I _B	— 基极电流.....	0.6A

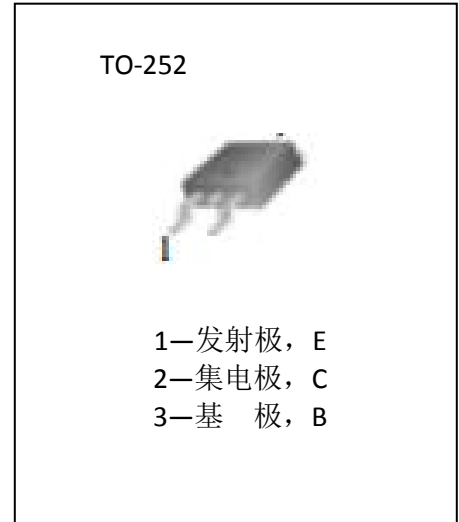

■ 电参数 (T_a=25℃)

参数符号	符号说明	最小值	典型值	最大值	单位	测试条件
I _{CB0}	集电极—基极截止电流			-1	μA	V _{CB} =-30V, I _E =0
I _{EB0}	发射极—基极截止电流			-1	μA	V _{EB} =-5V, I _C =0
h _{FE}	直流电流增益	60		400		V _{CE} =-2V, I _C =-1A
V _{CE(sat)}	集电极—发射极饱和压降		-0.3	-0.5	V	I _C =-2A, I _B =-0.2A
V _{BE(sat)}	基极—发射极饱和压降		-1.0	-2.0	V	I _C =-2A, I _B =-0.2A
C _{ob}	共基极输出电容		55		pF	V _{CB} =-10V, I _E =0, f=1MHz
f _T	特征频率		80		MHz	V _{CE} =-5V, I _E =-0.1A

■ 分档及其标志

R	Q	P	E
60—120	100—200	160—320	200—400

■ 典型特性曲线

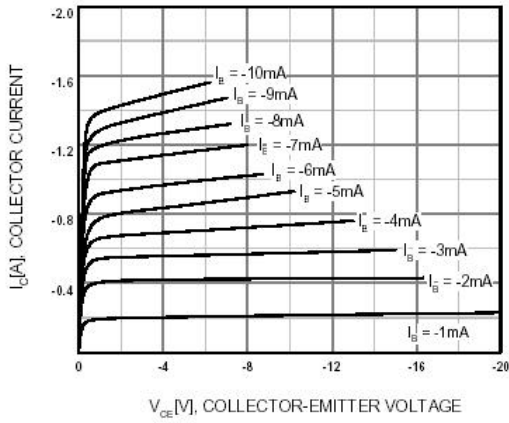


Figure 1. Static Characteristic

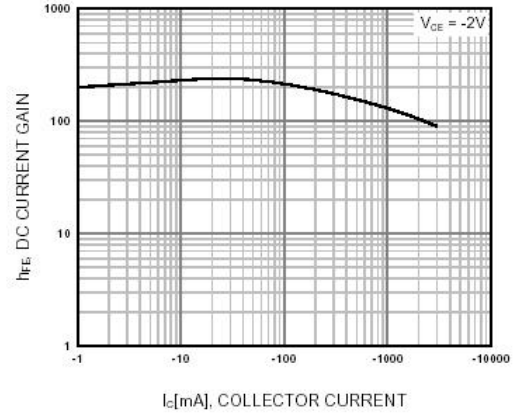


Figure 2. DC current Gain

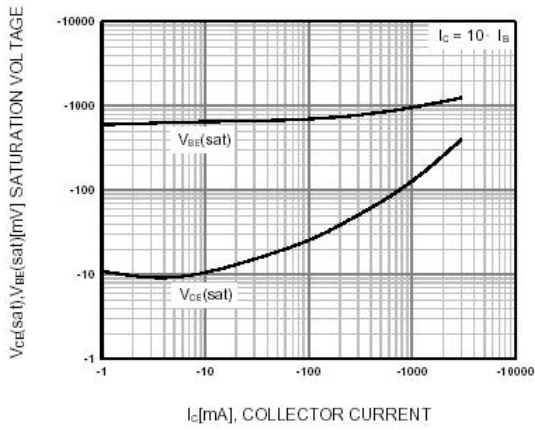


Figure 3. Base-Emitter Saturation Voltage
Collector-Emitter Saturation Voltage

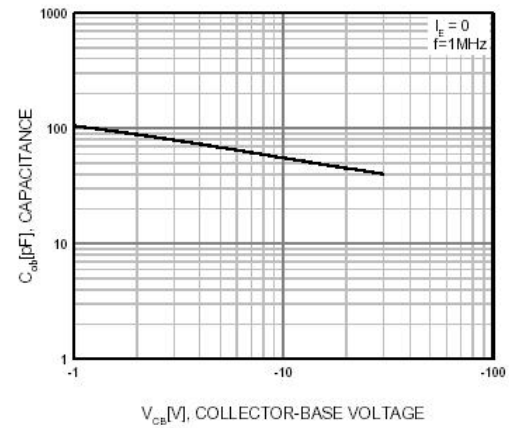


Figure 4. Collector Output Capacitance

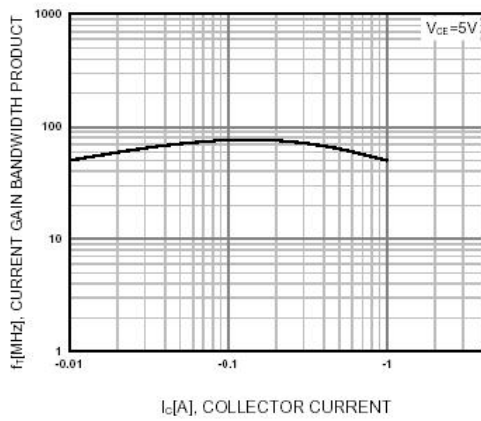


Figure 5. Current Gain Bandwidth Product

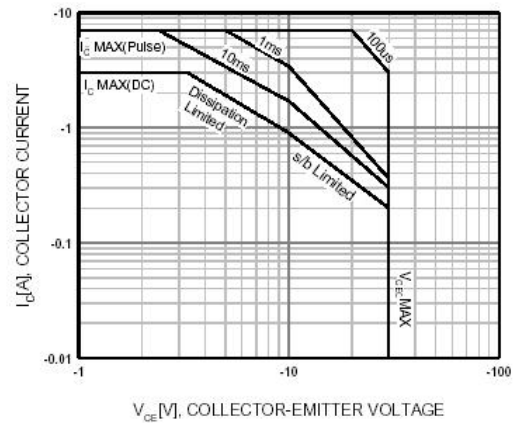


Figure 6. Safe Operating Area

■ 典型特性曲线

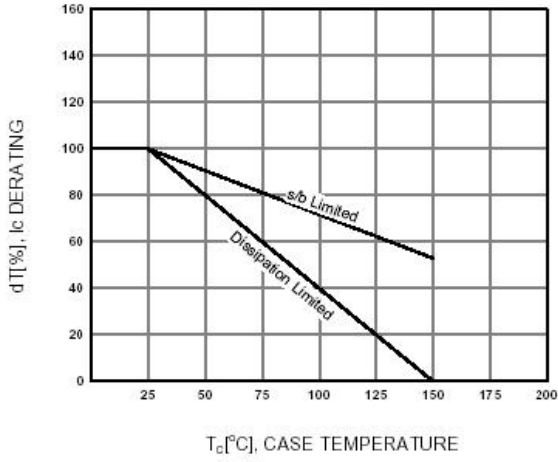


Figure 7. Derating Curve of Safe Operating Areas

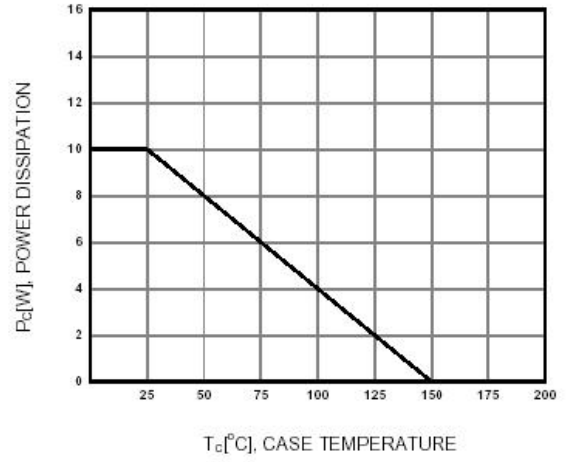


Figure 8. Power Derating

NOTE:

1. Exceeding the maximum ratings of the device in performance may cause damage to the device, even the permanent failure, which may affect the dependability of the machine. Please do not exceed the absolute maximum ratings of the device when circuit designing.
2. When installing the heat sink, please pay attention to the torsional moment and the smoothness of the heat sink.
3. MOSFETs is the device which is sensitive to the static electricity, it is necessary to protect the device from being damaged by the static electricity when using it.
4. Shenzhen Minos reserves the right to make changes in this specification sheet and is subject to change without prior notice.

CONTACT:

深圳市迈诺斯科技有限公司（总部）

地址：深圳市福田区华富街道田面社区深南中路4026号田面城市大厦22B-22C

邮编：518025

电话：0755-83273777

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [Minos manufacturer](#):

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-TL-E](#) [BC856BW-13-F](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [MCH6102-TL-E](#) [BC846B-13-F](#) [2N3879](#) [30A02MH-TL-E](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANSR2N2907AUB](#) [CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#) [MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#) [2N6678](#) [2N2907Ae4](#)