

## Silicon N-Channel Power MOSFET

### Description


The MD9N90 uses advanced technology and design to provide excellent  $R_{DS(ON)}$ . It can be used in a wide variety of applications.

### General Features

- ①  $V_{DS}=900V$ ,  $R_{dson}<1.15m\Omega$  @  $V_{GS}=10V$ ,  $I_D=9A$  (Typ:0.97 $\Omega$ )
- ② Low ON Resistance
- ③ Low Reverse transfer capacitances
- ④ 100% Single Pulse avalanche energy Test

### Application

- ① Power switching application
- ② Adapter and charger

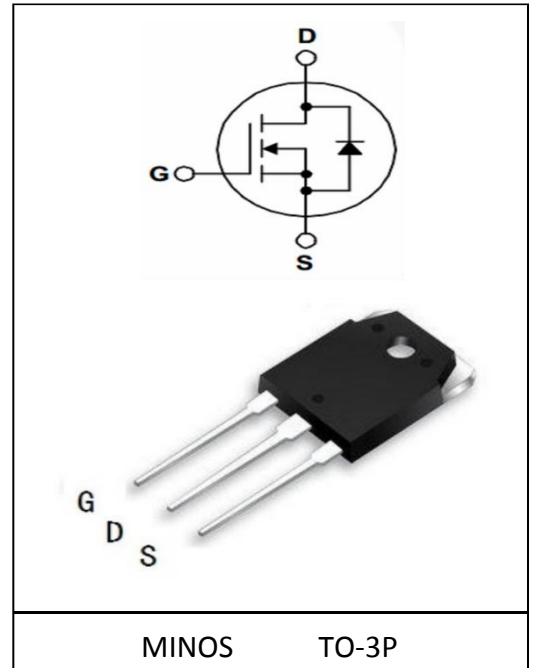

### Package Marking And Ordering Information:

Ordering Codes	Package	Product Code	Packing
MD9N90	TO-3P	MD9N90	Tube

### Electrical Characteristics @ $T_a=25^\circ C$ (unless otherwise specified)

#### Limited Parameters:

Symbol	Parameter	Value	Unit
$V_{DSS}$	Drain-to-Source Breakdown Voltage	900	V
$I_D$	Drain Current (continuous) at $T_c=25^\circ C$	9	A
$I_{DM}$	Drain Current (Pulsed)	36	A
$V_{GS}$	Gate to Source Voltage	$\pm 30$	V
$P_{tot}$	Total Dissipation at $T_c=25^\circ C$	350	W
$T_j$	Max. Operating Junction Temperature	175	$^\circ C$
$E_{as}$	Single Pulse Avalanche Energy	960	mJ

**Electrical Parameters:**

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
$V_{DS}$	Drain-source Voltage	$V_{GS}=0V, I_D=250\mu A$	900			V
$R_{DS(on)}$	Static Drain-to-Source on-Resistance	$V_{GS}=10V, I_D=4.5A$		0.97	1.15	$\Omega$
$V_{GS(th)}$	Gated Threshold Voltage	$V_{DS}=V_{GS}, I_D=250\mu A$	3.0	3.95	5.0	V
$I_{DSS}$	Drain to Source leakage Current	$V_{DS}=900V, V_{GS}=0V$			1.0	$\mu A$
$I_{GSS(F)}$	Gated to Source Forward Leakage	$V_{GS}=+30V$			100	nA
$I_{GSS(R)}$	Gated to Source Reverse Leakage	$V_{GS}=-30V$			-100	nA
$C_{iss}$	Input Capacitance	$V_{GS}=0V,$ $V_{DS}=25V,$ $f=1.0MHz$		2530		pF
$C_{oss}$	Output Capacitance			215		pF
$C_{rss}$	Reverse Transfer Capacitance			23		pF
<b>Switching Characteristics</b>						
Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
$t_{d(on)}$	Turn-on Delay Time	$V_{DD}=450V, I_D=9A,$ $R_G=25\Omega$		60		nS
$t_r$	Turn-on Rise Time			130		nS
$t_{d(off)}$	Turn-off Delay Time			130		nS
$t_f$	Turn-off Fall Time			85		nS
$Q_g$	Total Gate Charge	$V_{DS}=720V$ $I_D=9A$ $V_{GS}=10V$		60		nC
$Q_{gs}$	Gate-Source Charge			13		nC
$Q_{gd}$	Gate-Drain Charge			25		nC
<b>Source-Drain Diode Characteristics</b>						
Symbol	Paramet	Test Conditions	Min	Typ	Max	Unit
$I_{SD}$	S-D Current(Body Diode)				9	A
$I_{SDM}$	Pulsed S-D Current(Body Diode)				36	A
$V_{SD}$	Diode Forward Voltage	$V_{GS}=0V, I_{DS}=9A$			1.5	V
$t_{rr}$	Reverse Recovery Time	$T_J=25^\circ C, I_S=9A$ $di/dt=100A/us$			1000	nS
$Q_{rr}$	Reverse Recovery Charge				17.0	$\mu C$
*Pulse Test: Pulse Width $\leq 300\mu s$ , Duty Cycle $\leq 2\%$						
Symbol	Parameter	Typ			Units	
$R_{\theta JC}$	Junction-to-Case	0.42			$^\circ C/W$	

Typical Performance Characteristics

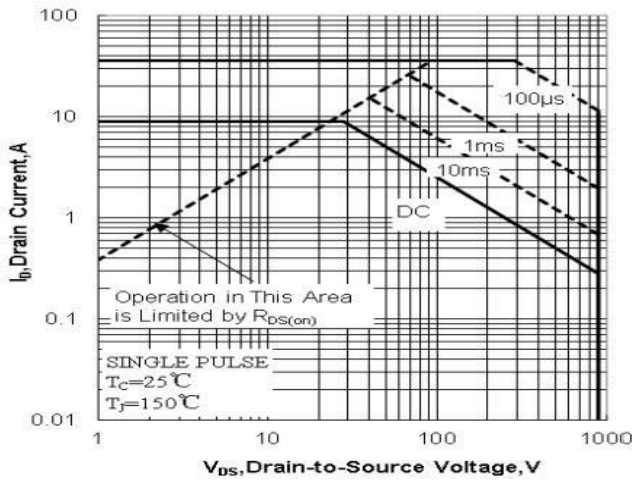


Figure 1 Maximum Forward Bias Safe Operating Area

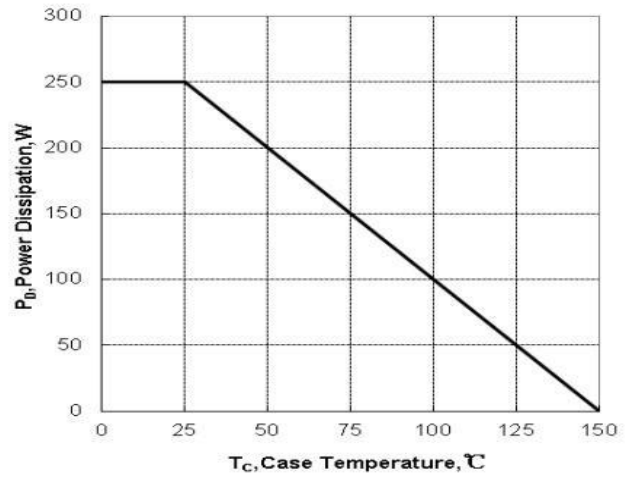


Figure 2 Maximum Power dissipation vs Case Temperature

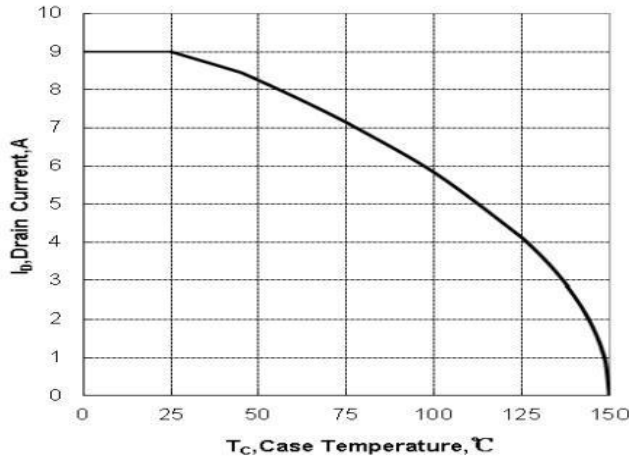


Figure 3 Maximum Continuous Drain Current vs Case Temperature

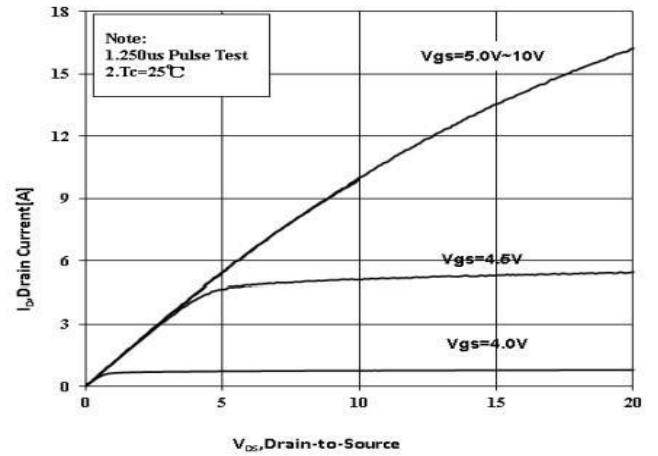


Figure 4 Typical Output Characteristics

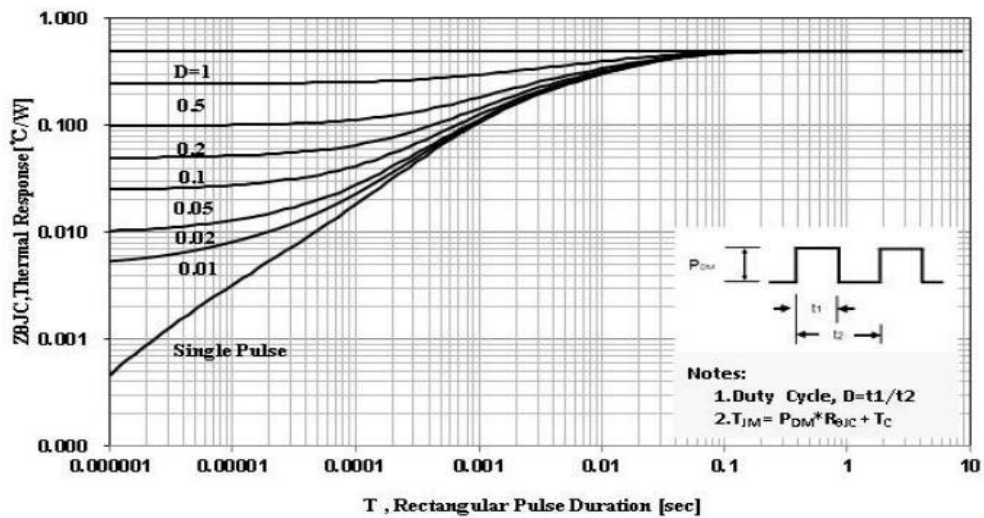


Figure 5 Maximum Effective Thermal Impedance, Junction to Case

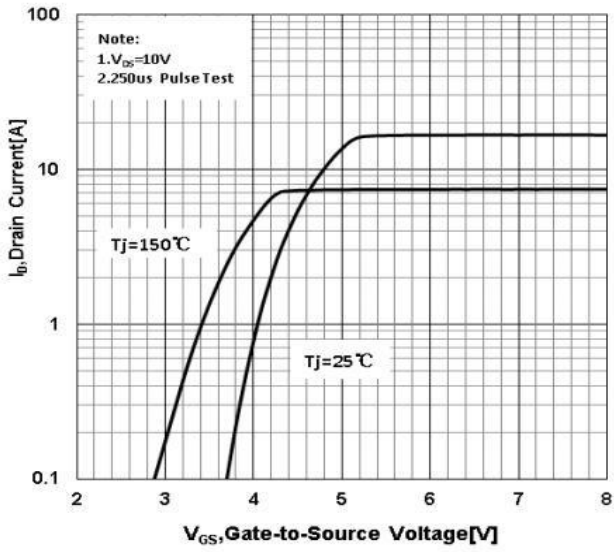


Figure 6 Typical Transfer Characteristics

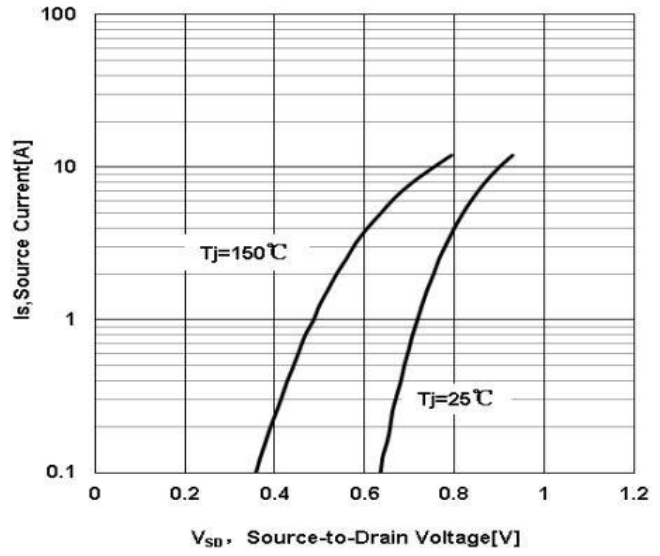


Figure 7 Typical Body Diode Transfer Characteristics

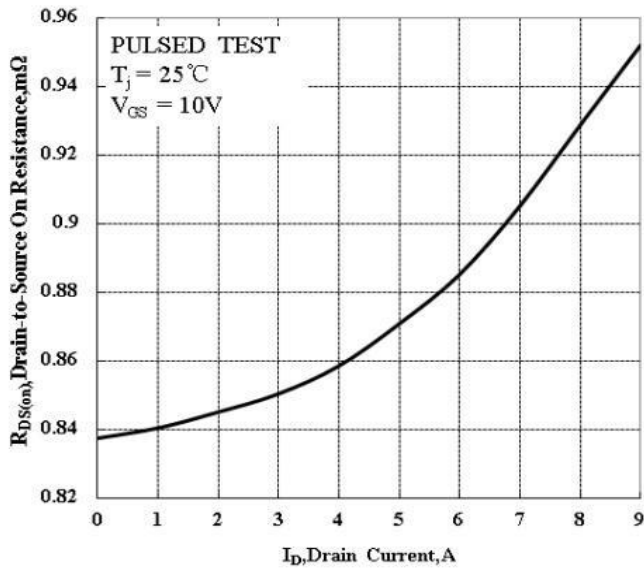


Figure 8 Typical Drain to Source ON Resistance vs Drain Current

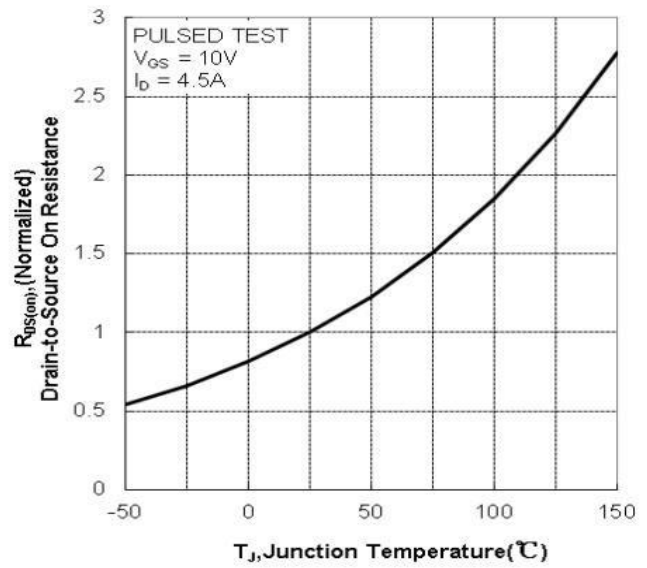


Figure 9 Typical Drain to Source on Resistance vs Junction Temperature

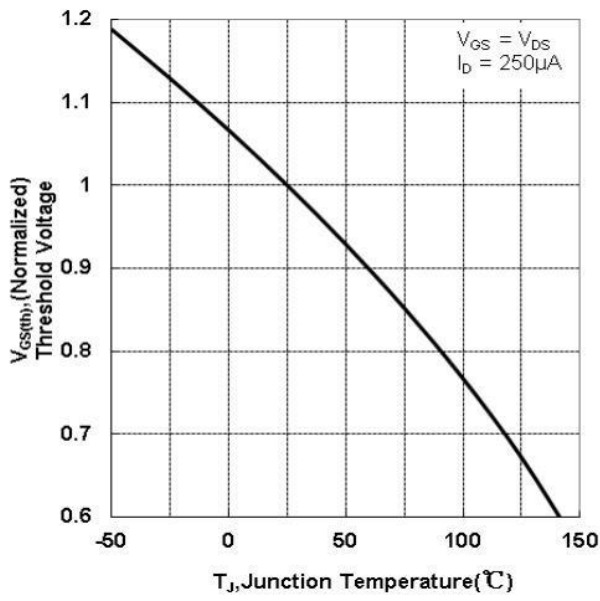


Figure 10 Typical Theshold Voltage vs Junction Temperature

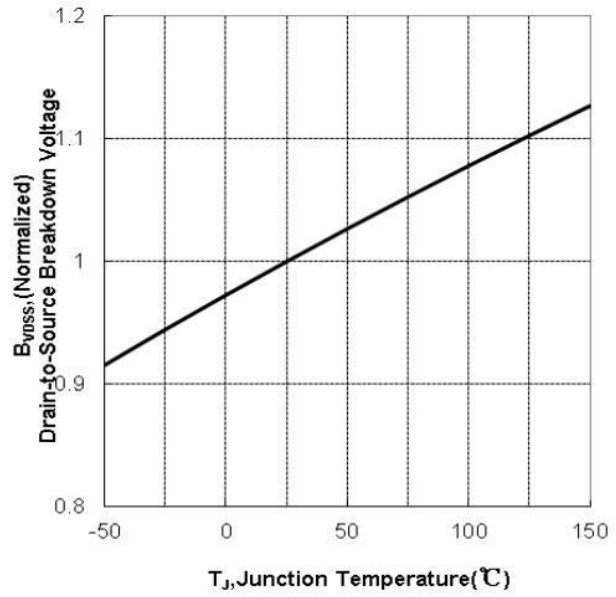


Figure 11 Typical Breakdown Voltage vs Junction Temperature

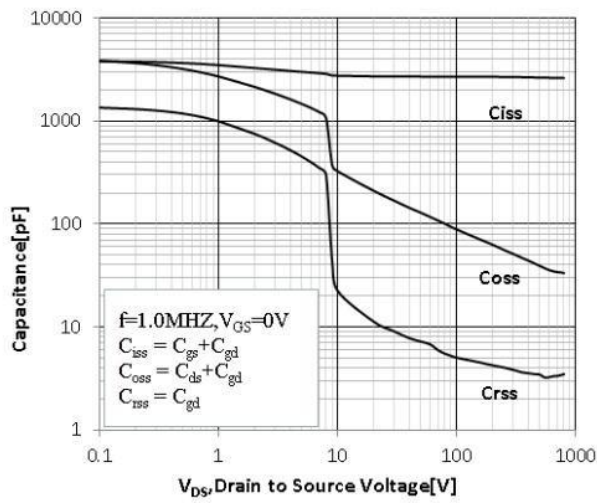


Figure 12 Typical Capacitance vs Drain to Source Voltage


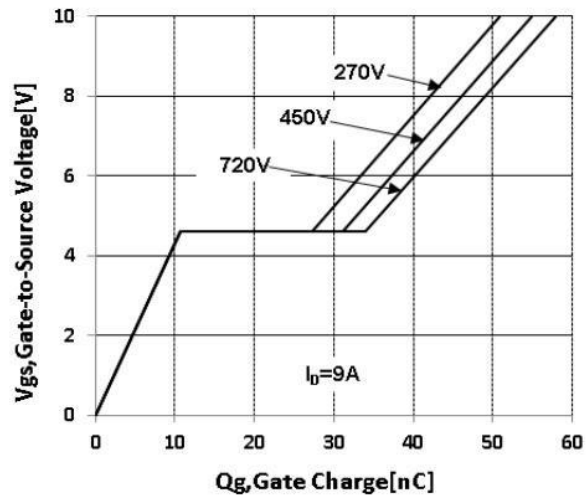


Figure 13 Typical Gate Charge vs Gate to Source Voltage



Package Information

TO-3P PACKAGE

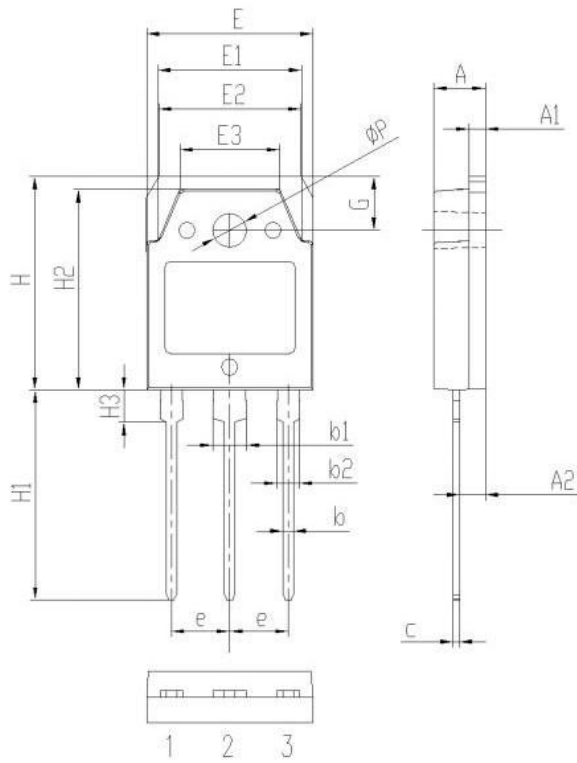

Symbol	Dimensions (millimeters)	
	Min.	Max.
A	4.60	5.00
A1	1.30	1.70
A2	2.20	2.60
b	0.80	1.20
b1	2.90	3.30
b2	1.90	2.30
c	0.40	0.80
e	5.25	5.65
E	15.3	15.7
E1	13.2	13.6
E2	13.1	13.5
E3	9.10	9.50
H	19.7	20.1
H1	19.1	20.1
H2	18.3	18.7
H3	2.80	3.20
G	4.80	5.20
$\Phi P$	3.00	3.40



**NOTE:**

1. Exceeding the maximum ratings of the device in performance may cause damage to the device, even the permanent failure, which may affect the dependability of the machine. Please do not exceed the absolute maximum ratings of the device when circuit designing.
2. When installing the heat sink, please pay attention to the torsional moment and the smoothness of the heat sink.
3. MOSFETs is the device which is sensitive to the static electricity, it is necessary to protect the device from being damaged by the static electricity when using it.
4. Shenzhen Minos reserves the right to make changes in this specification sheet and is subject to change without prior notice.

**CONTACT:**

**深圳市迈诺斯科技有限公司（总部）**

地址：深圳市福田区华富街道田面社区深南中路4026号田面城市大厦22B-22C

邮编：518025

电话：0755-83273777

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [MOSFET](#) category:*

*Click to view products by [Minos](#) manufacturer:*

Other Similar products are found below :

[IRFD120](#) [IRFY240C](#) [JANTX2N5237](#) [2SK2267\(Q\)](#) [BUK455-60A/B](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#)  
[IPS70R2K0CEAKMA1](#) [SQD23N06-31L-GE3](#) [TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [EFC2J004NUZTDG](#)  
[DMN1053UCP4-7](#) [SQJ469EP-T1-GE3](#) [NTE2384](#) [DMC2700UDMQ-7](#) [DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#)  
[DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#) [STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#)  
[DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#) [IPB80P04P405ATMA2](#) [2N7002W-G](#) [MCAC30N06Y-](#)  
[TP](#) [MCQ7328-TP](#) [NTMC083NP10M5L](#) [NVMFS2D3P04M8LT1G](#) [BXP7N65D](#) [BXP4N65F](#) [AOL1454G](#) [WMJ80N60C4](#) [BXP2N20L](#)  
[BXP2N65D](#) [BXT1150N10J](#) [BXT1700P06M](#) [TSM60NB380CP](#) [ROG](#) [RQ7L055BGTCR](#) [DMNH15H110SK3-13](#)