
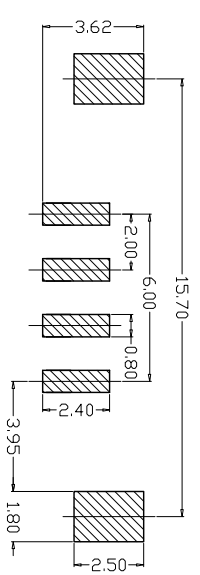
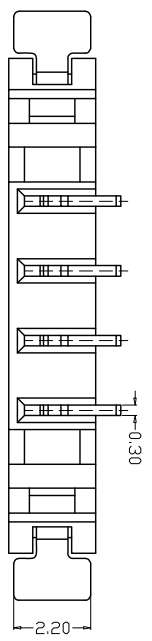
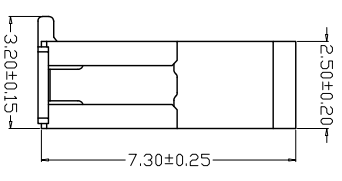
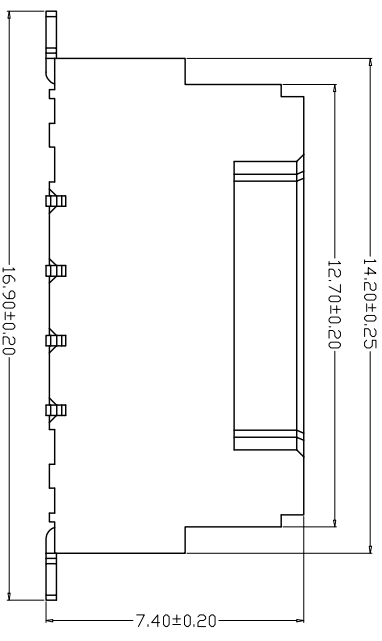
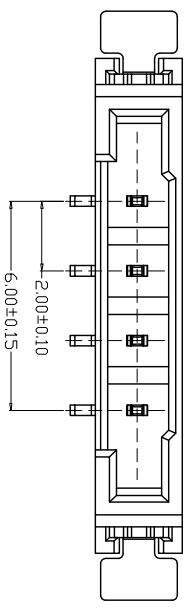


REV.	ECN. NO.	APPD.
A		

SPECIFICATIONS

Current Rating: 1A AC, DC  
Voltage Rating: 250V AC, DC  
Temperature Range: -25°C ~ +130°C  
Contact Resistance: 20mΩ Max  
Insulation Resistance: 1000MΩ Min  
Withstanding Voltage: 1000V AC/minute  
Material  
Wafer: LCP UL94V-0  
PIN: C2680 Tin-plated  
Fixed piece: C2680 Tin-plated

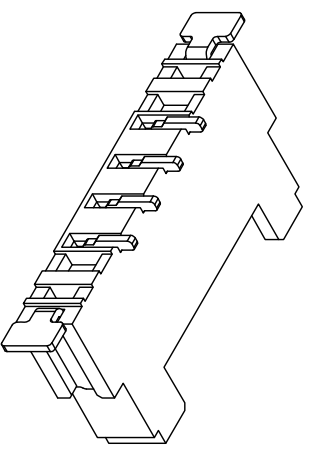

PCB LAYOUT

1		2		3		4		5		6		7	
E		D		C		B		A		E		D	
1		2		3		4		5		6		7	
E		D		C		B		A		E		D	

X. ±0.30	X.° ±5°	UNITS mm	NAME/(INTENDED USE)	MINTRON CO.,LTD.
X ±0.20	X° ±2°	MATL	NAME/(INTENDED USE)	
.XX ±0.10	.XX° ±1°	FINISH	PART NO.(INTENDED USE)	TITLE:
.XXX ±0.05	.XXX° ±0.5°		Q'TY	20028系列 4P 立贴
FLAT CABLE CONNECTOR			APPD: SUNNY	DWG NO.: MT20028-04A
			CHKD: LISA	SCALE 1/1
			DR: ZOE 2023-06-16	SHEET 1/1
				REV. A

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [MINTRON](#) manufacturer:*

Other Similar products are found below :

[57102-F02-18ULF](#) [58102-G61-06LF](#) [582553-1](#) [009176003701906](#) [01.001.5753.1](#) [0050291907](#) [02.125.8002.8](#) [609-3404](#) [61062-3](#)  
[CSU011177004](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [644827-2](#) [65495-038](#) [65692-001LF](#)  
[65781-018](#) [65781-047](#) [65817-010LF](#) [65817-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68631-112](#) [68645-018](#) [699319-000](#)  
[M90C108951C](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5028](#) [71.350.2428.0](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-](#)  
[3052](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#) [803-41-018-10-001000](#)  
[803-43-024-10-001000](#)