
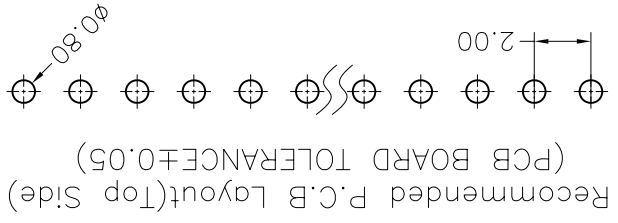
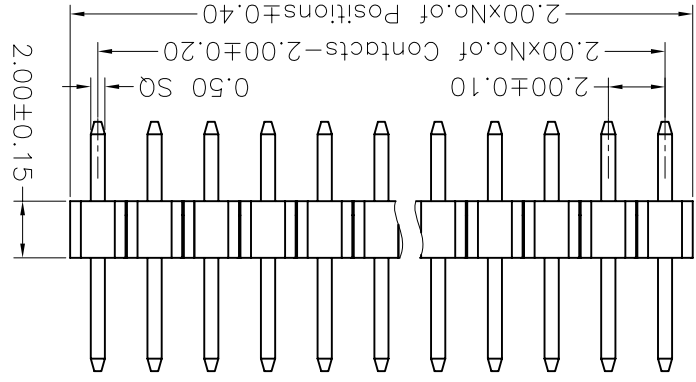


1 2 3 4 5 6 7

MINTRON CO., LTD.		NAME (INTENDED USE)		UNITS mm		MATERIAL		PART NO. (INTENDED USE)		TITLE: MTP220-11XXS1		DWG NO.:	
X. ± 0.30	X. ± 0.20	X. ± 0.10	X. ± 0.05	FINISH	QTY	APPD: SUNNY	CHKD: LISA	DR: ZOE		2006-11-28		SCALE 1/1	REV. A
X. ± 0.20		X. ± 0.10		X. ± 0.05		X. ± 0.05		X. ± 0.05		X. ± 0.05		X. ± 0.05	

Dimension antitheses list		
ITEM	A	B
Standard	2.80	4.00
Alternate		

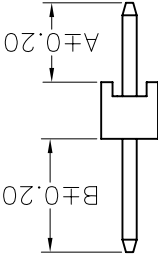

NOTES:  
 Current Rating: 3.0AMP  
 Contact Resistance: 20mΩ max  
 Withstand Voltage: 500V AC/DC  
 Insulation Resistance: 1000MΩ min  
 Operation Temperature: -40°C to +105°C  
 Contact Material: Brass  
 Contact plating: Au or Sn Over Ni  
 Insulator Material: PBT or PA6T+30%GF (UL94V-0)

MTP220-11XXS1  
 No. of Pins per Row: 01~40

REV.	ECN. NO.	APPD.
A		

1 2 3 4 5 6 7

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [MINTRON](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)