


Kondensator AUDIO AUDIO Capacitor

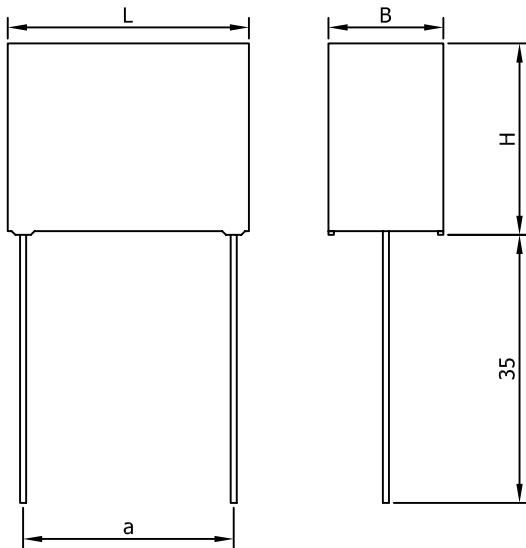

Pojemność znamionowa Rated capacitance	Tolerancja pojemności Capacitance tolerance	Wymiary / Dimensions			
		L±0,5	H±0,5	B±0,5	a
μF	%	mm	mm	mm	mm
0,1	±2% / ±5%	18	14,0	5,5	15,0±0,5
0,15			12,5	6,5	
0,22			13,5	7,5	
0,27			14,5	8,5	
0,33			17	8,5	
0,47			15,5	7,5	
0,68		26,5	18,5	10,5	22,5±0,7
1,0			18,5	10,5	
1,0		31,5	20,5	11,5	27,5±0,7
1,5			23,5	13,5	
2,2			24,5	15,0	
3,3		41,5	28,5	16,0	37,5±0,5
4,7			33,0	18,0	
6,8		42,5	38,0	21,0	37,5±0,5
8,2			38,0	21,0	
10,0			38,0	21,0	

Istnieje możliwość uzgodnienia innych pojemności oraz długości i rodzaju wyprowadzeń.
Other capacitance values and terminal lengths and types can be agreed upon request.

Dane Techniczne / Technical data:

Napięcie znamionowe 450VDC
Rated voltage

Tg kąta stratności <0,0020 @ 1kHz
Dissipation factor

Kategoria klimatyczna 025/085/21/C
Climatic category


Wymiary zgodnie z tabelą
Dimensions acc. to table

(Uwagi/Notes)

1. Wyrób spełnia wymagania Dyrektywy RoHS (2011/65/WE).

This product fulfils the requirements of the RoHS Directive (2011/65/EC).

PRZYKŁADOWY NADRUK
PRINTING LAYOUT EXAMPLE



Description:

The MKP-01 capacitors, made from metallized polypropylene film, are designed for use in audio equipment. The design of the capacitors minimizes the parasitic impedance components: inductance and resistance, resulting in improved quality of sound in a given audio system.

High quality and durability of the capacitors is assured by the use of carefully selected materials, production technology, as well as testing and measuring methods. These capacitors feature the use of a dielectric material with the property of self-healing during operation, impregnation of the capacitor element in oil, radial terminals made of tinned copper wire, box-shaped plastic housing, and self-extinguishing potting compound of flammability class V0.

The capacitors are furthermore subjected to a series of specific tests and measurements, including a unique test using pulses of increased current amplitude and frequency of 22kHz.

The MKP-01 capacitors can be used in d.c. and a.c. circuits within the temperature range of their climatic category. The d.c. voltage value or a.c. voltage amplitude should not exceed the specified rated voltage.



MIFLEX S.A.

ZAKŁADY PODZESPOŁÓW RADIOWYCH
99-300 KUTNO, UL. GRUNWALDZKA 3 POLAND

Chief Engineering Specialist +48 24 355 12 10

Design Department +48 24 355 12 77

Production Engineering Department +48 24 355 12 77

Fax +48 24 355 11 88

E-mail miflexsa@miflex.com.pl

Strona/
Page

1/1

Data aktualizacji/
Revision date

10.06.2015.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Film Capacitors](#) category:

Click to view products by [Miflex](#) manufacturer:

Other Similar products are found below :

[F339X134748MIP2T0](#) [F450KG153J250ALH0J](#) [750-1018](#) [FKP1-1500160010P15](#) [FKP1R031007D00JYSD](#) [FKP1R031507E00JYSD](#)
[FKP1U024707E00KYSD](#) [82DC4100CK60J](#) [82EC1100DQ50K](#) [PFR5101J100J11L16.5TA18](#) [PME261JB5220KR19T0](#) [A451GK223M040A](#)
[A561ED221M450A](#) [QXJ2E474KTPT](#) [QXL2B333KTPT](#) [R49AN347000A1K](#) [EEC2G505HQA406](#) [B25668A6676A375](#) [B25673A4282E140](#)
[BFC233868148](#) [BFC2370GC222](#) [C3B2AD44400B20K](#) [C4ASWBU3220A3EK](#) [CB027C0473J--](#) [CB177I0184J--](#) [CB182K0184J--](#) [23PW210](#)
[950CQW5H-F](#) [SBDC3470AA10J](#) [SCD105K122A3-22](#) [2N3155](#) [A571EH331M450A](#) [FKP1-2202KV5P15](#) [FKS3-680040010P10](#)
[QXL2E473KTPT](#) [445450-1](#) [B25669A3996J375](#) [46KI322000M1M](#) [46KR415050M1K](#) [4BSNBX4100ZBFJ](#) [MKP383510063JKP2T0](#)
[MKPY2-.02230020P15](#) [MKT 1813-368-015](#) [4055292001](#) [46KN410000N1K](#) [EEC2E106HQA405](#) [EEC2G205HQA402](#) [EEC2G805HQA415](#)
[P409CP224M250AH470](#) [82EC2150DQ50K](#)