

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0010977306](#)  
**Status:** **Active**  
**Overview:** C-Grid Connector Products  
**Description:** 2.54mm Pitch C-Grid Breakaway Header, Dual Row, Vertical, High Temperature, 30 Circuits, 0.38µm Gold (Au) Selective Plating, Tin (Sn) PC Tail Plating, 2.79mm PC Tail

**Documents:**

|                                |  |
|--------------------------------|--|
| <a href="#">3D Model</a>       | <a href="#">Product Specification PS-70280-001 (PDF)</a> |
| <a href="#">Drawing (PDF)</a>  | <a href="#">RoHS Certificate of Compliance (PDF)</a>     |
| <a href="#">3D Model (PDF)</a> |  |

**Agency Certification**


|     |         |
|-----|---------|
| CSA | LR19980 |
| UL  | E29179  |

**General**

|                |   |
|----------------|---|
| Product Family | PCB Headers                               |
| Series         | <a href="#">70280</a>                     |
| Application    | Board-to-Board, Signal, Wire-to-Board     |
| Overview       | <a href="#">C-Grid Connector Products</a> |
| Product Name   | C-Grid                                    |
| UPC            | 822350040075                              |

**Physical**

|                                |                                |
|--------------------------------|--------------------------------|
| Breakaway                      | Yes                            |
| Circuits (Loaded)              | 30                             |
| Circuits (maximum)             | 30                             |
| Color - Resin                  | Black                          |
| Durability (mating cycles max) | 50                             |
| First Mate / Last Break        | No                             |
| Flammability                   | 94V-0                          |
| Glow-Wire Capable              | No                             |
| Guide to Mating Part           | No                             |
| Keying to Mating Part          | None                           |
| Lock to Mating Part            | None                           |
| Material - Metal               | Copper Alloy                   |
| Material - Plating Mating      | Gold                           |
| Material - Plating Termination | Tin                            |
| Material - Resin               | High Temperature Thermoplastic |
| Net Weight                     | 2.099/g                        |
| Number of Rows                 | 2                              |
| Orientation                    | Vertical                       |
| PC Tail Length                 | 2.79mm                         |
| PCB Locator                    | No                             |
| PCB Retention                  | None                           |
| PCB Thickness - Recommended    | 1.60mm                         |
| Packaging Type                 | Bag                            |
| Pitch - Mating Interface       | 2.54mm                         |
| Plating min - Mating           | 0.381µm                        |
| Plating min - Termination      | 1.905µm                        |
| Polarized to Mating Part       | No                             |
| Polarized to PCB               | No                             |
| Shrouded                       | No                             |
| Stackable                      | Yes                            |
| Temperature Range - Operating  | -40° to +105°C                 |
| Termination Interface: Style   | Through Hole                   |

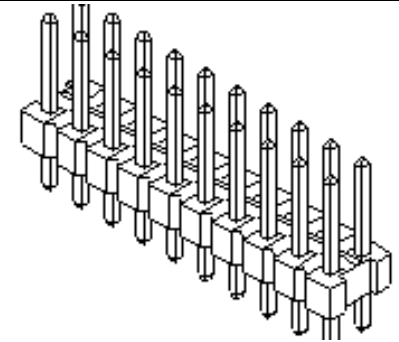

Series image - Reference only

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
ECHA\_01\_2020 (16  
January 2020

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[70280 Series](#)

**Electrical**

|                               |      |
|-------------------------------|------|
| Current - Maximum per Contact | 3.0A |
| Voltage - Maximum             | 250V |

**Solder Process Data**

|  |          |
|--|----------|
| Duration at Max. Process Temperature (seconds) | 030      |
| Lead-free Process Capability                   | SMC&WAVE |
| Max. Cycles at Max. Process Temperature        | 003      |
| Process Temperature max. C                     | 260      |

**Material Info**

|                    |              |
|--------------------|--------------|
| Engineering Number | A-70280-0175 |
|--------------------|--------------|

**Reference - Drawing Numbers**

|                       |                      |
|-----------------------|----------------------|
| Product Specification | PS-70280-001         |
| Sales Drawing         | SDA-70280-0001-4000- |

This document was generated on 04/02/2020

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [molex](#) manufacturer:*

Other Similar products are found below :

[60506-C-50](#) [73108](#) [72903](#) [1062837003](#) [0533241060](#) [68301-1017](#) [71506-C](#) [880504](#) [387790039](#) [53254-0710](#) [85071-0017](#) [387204903](#)  
[783472003](#) [514412093](#) [0436500518](#) [0194180027](#) [0192210405](#) [0191640082](#) [0982660127](#) [0152670317](#) [0192210414](#) [0982670277](#)  
[0026482195](#) [0191310031](#) [503308-4410](#) [0190070015](#) [02-09-6102](#) [0008650814](#) [791099208](#) [0039000218](#) [89762-1403](#) [89762-1542](#) [89762-](#)  
[1582](#) [0011404526](#) [00136](#) [0022173102](#) [0026615060](#) [CR4006A30M003](#) [0039532085](#) [58098-0628](#) [0003092041](#) [0008520123](#) [0011030025](#)  
[0011184017](#) [0022162060](#) [0022552102](#) [01312](#) [M15730061](#) [61432](#) [6150300002](#)