

- NOTES:
- MATERIALS:
    - RAW CABLE- 2 TWIN-AX PAIRS, PVC JACKET
    - PCB - HALOGEN FREE, UL94 V-0
    - BACKSHELLS - ZINC DIECAST WITH BRIGHT NICKEL PLATING
    - RIVETS - STAINLESS STEEL
  - IMPEDANCE - 100 OHMS DIFFERENTIAL
  - RoHS COMPLIANT, NO EXEMPTIONS

SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: UPDATED LABEL DIM		
	DIMENSION UNITS	SCALE			
▽ = 0	mm				<b>ZQSFP+ TO 4ZSFP+ 25G CBL ASSY</b>
▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)				
▽ = 0	ANGULAR TOL ± 1.0°			EC NO: 607196	PRODUCT CUSTOMER DRAWING
▽ = 0	4 PLACES ±			DRWN: GSARVADE 2018/10/31	
▽ = 0	3 PLACES ±			CHK'D: GSARVADE 2018/11/08	DOCUMENT NUMBER: <b>1003450001</b>
▽ = 0	2 PLACES ± 0.13			APPR: KNAGANNA 2018/11/08	
▽ = 0	1 PLACE ± 0.25			INITIAL REVISION:	DOC TYPE: PSD
▽ = 0	0 PLACES ±			DRWN: BCHEN06 2017/01/10	DOC PART: 000
⊠ = 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION	DRAWING	SERIES	REVISION: G
■ = 0			<b>D-SIZE</b>	<b>100345</b>	SHEET NUMBER: 1 OF 3
▽ = 0				SEE P/N TABLE	CUSTOMER: GENERAL MARKET





WIRING DIAGRAM					
zQSFP+		zSFP+		PLUG	
PAD	SIGNAL	SIGNAL	PAD		
38	GND	----	GND	A	
37	TX1-	--->	RD-		12
36	TX1+	--->	RD+		13
19	GND	----	GND		18
17	RX1+	<---	TD+	19	
18	RX1-	<---	TD-	B	
01	GND	----	GND		12
02	TX2-	--->	RD-		13
03	TX2+	--->	RD+		18
20	GND	----	GND	19	
22	RX2+	<---	TD+	C	
21	RX2-	<---	TD-		12
35	GND	----	GND		13
34	TX3-	--->	RD-		18
33	TX3+	--->	RD+	19	
16	GND	----	GND	D	
14	RX3+	<---	TD+		12
15	RX3-	<---	TD-		13
04	GND	----	GND		18
05	TX4-	--->	RD-	19	
06	TX4+	--->	RD+		
23	GND	----	GND		12
25	RX4+	<---	TD+		13
24	RX4-	<---	TD-		18

LOW SPEED SIGNALS zQSFP+	
PAD	SIGNAL
08	ModSelL
09	ResetL
10	VccRx
11	SCL
12	SDA
27	ModPrsL
28	IntL
29	VccTx
30	Vcc1
31	LPMODE

LOW SPEED SIGNALS zSFP+	
PAD	SIGNAL
02	Tx_Fault
03	Tx_Disable
04	SDA
05	SCL
06	Mod_ABS
07	RS0
08	Rx_LOS
09	RS1
15	VccR
16	VccT

LEGEND:  
 ---- = DRAIN LINES  
 ---> = TRANSMIT TO RECEIVE ON HIGH SPEED CIRCUITS

### CABLE BEND RADIUS

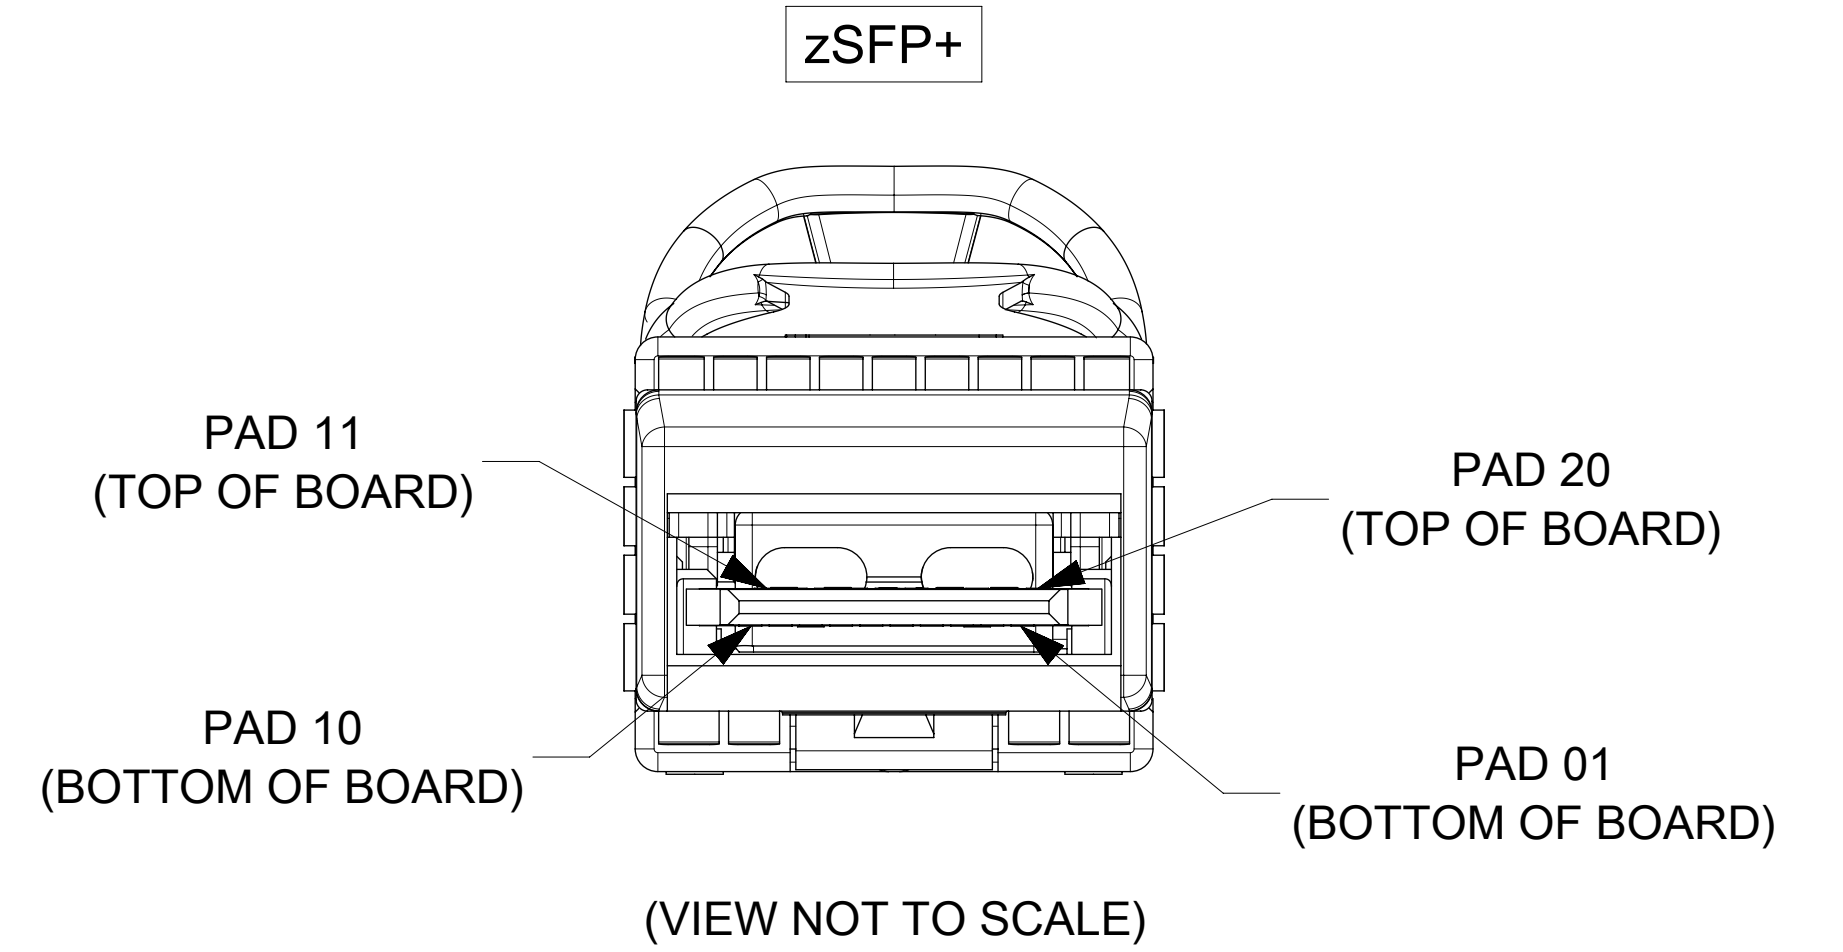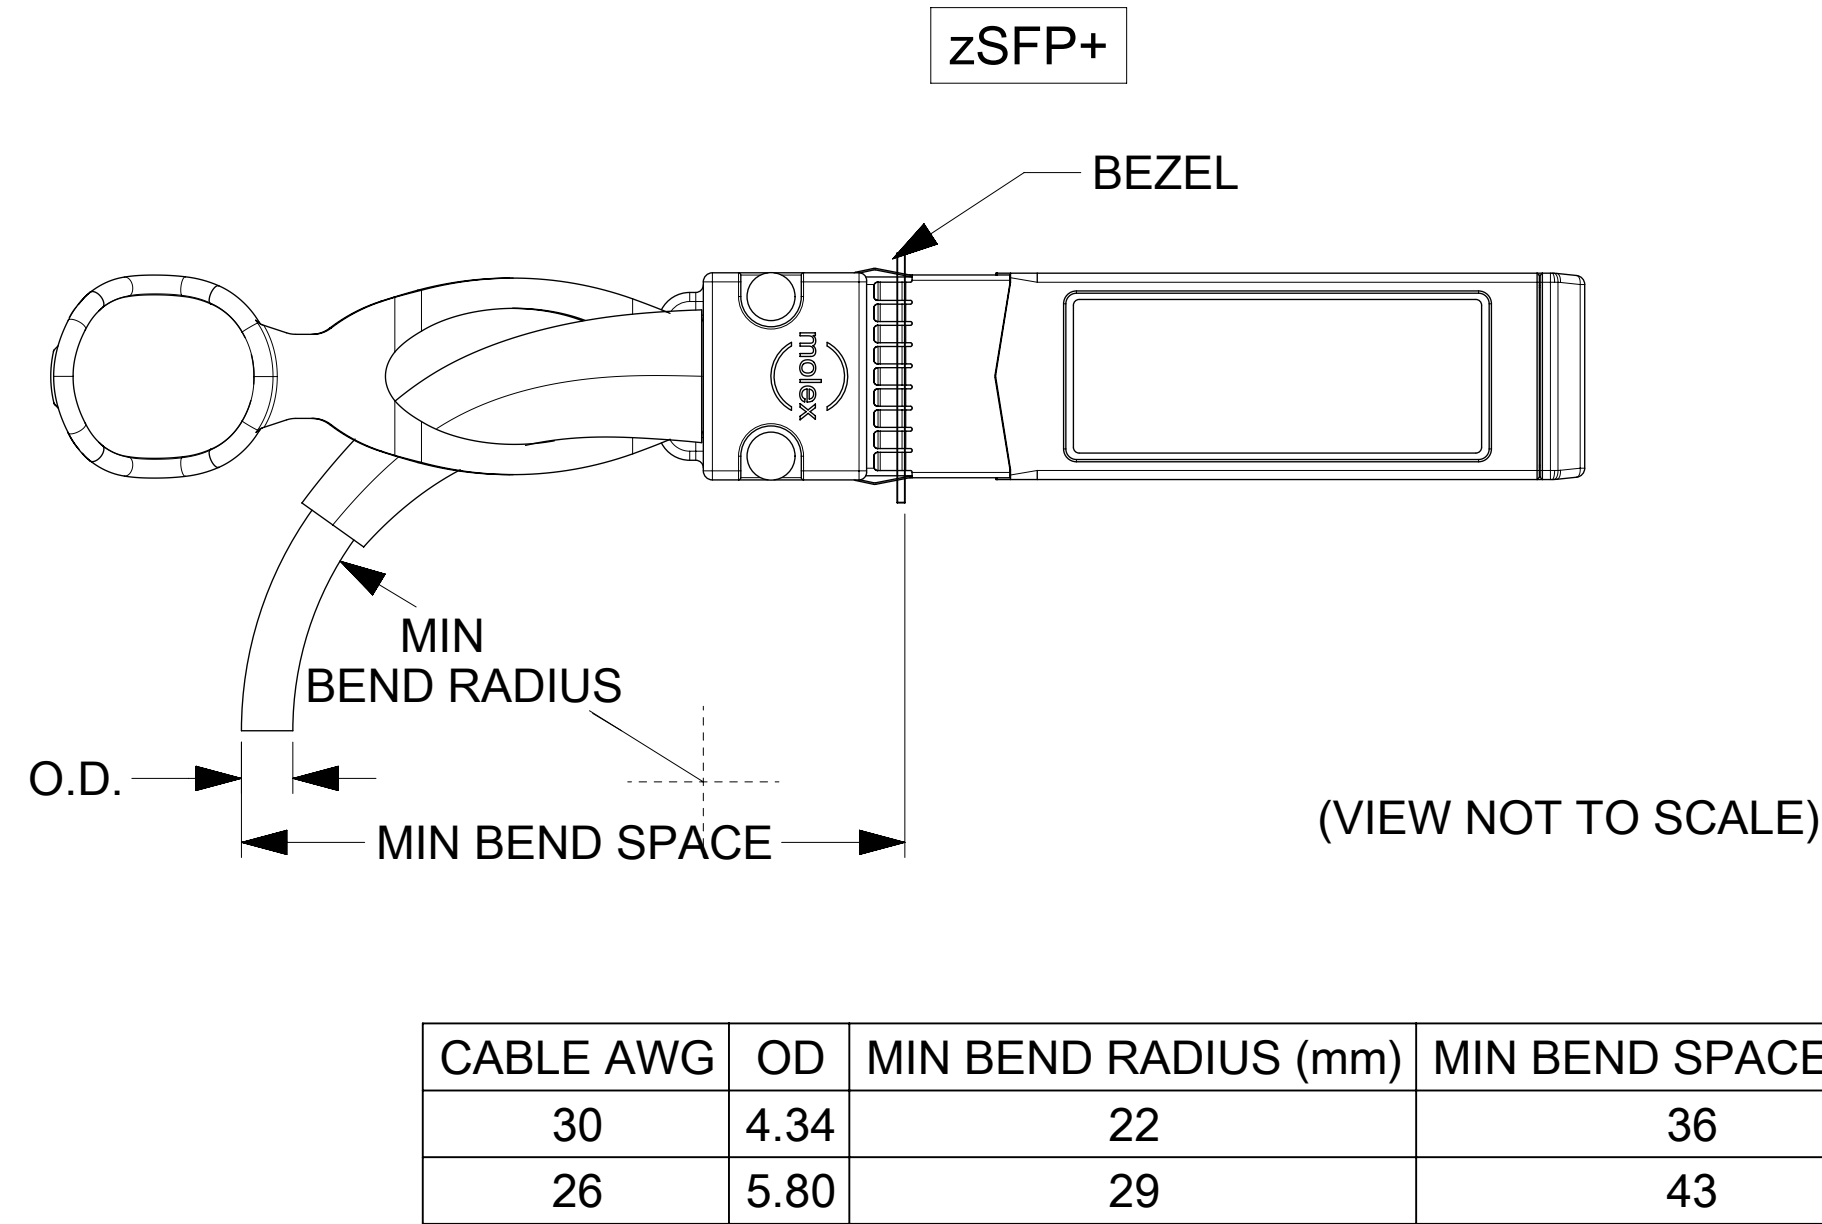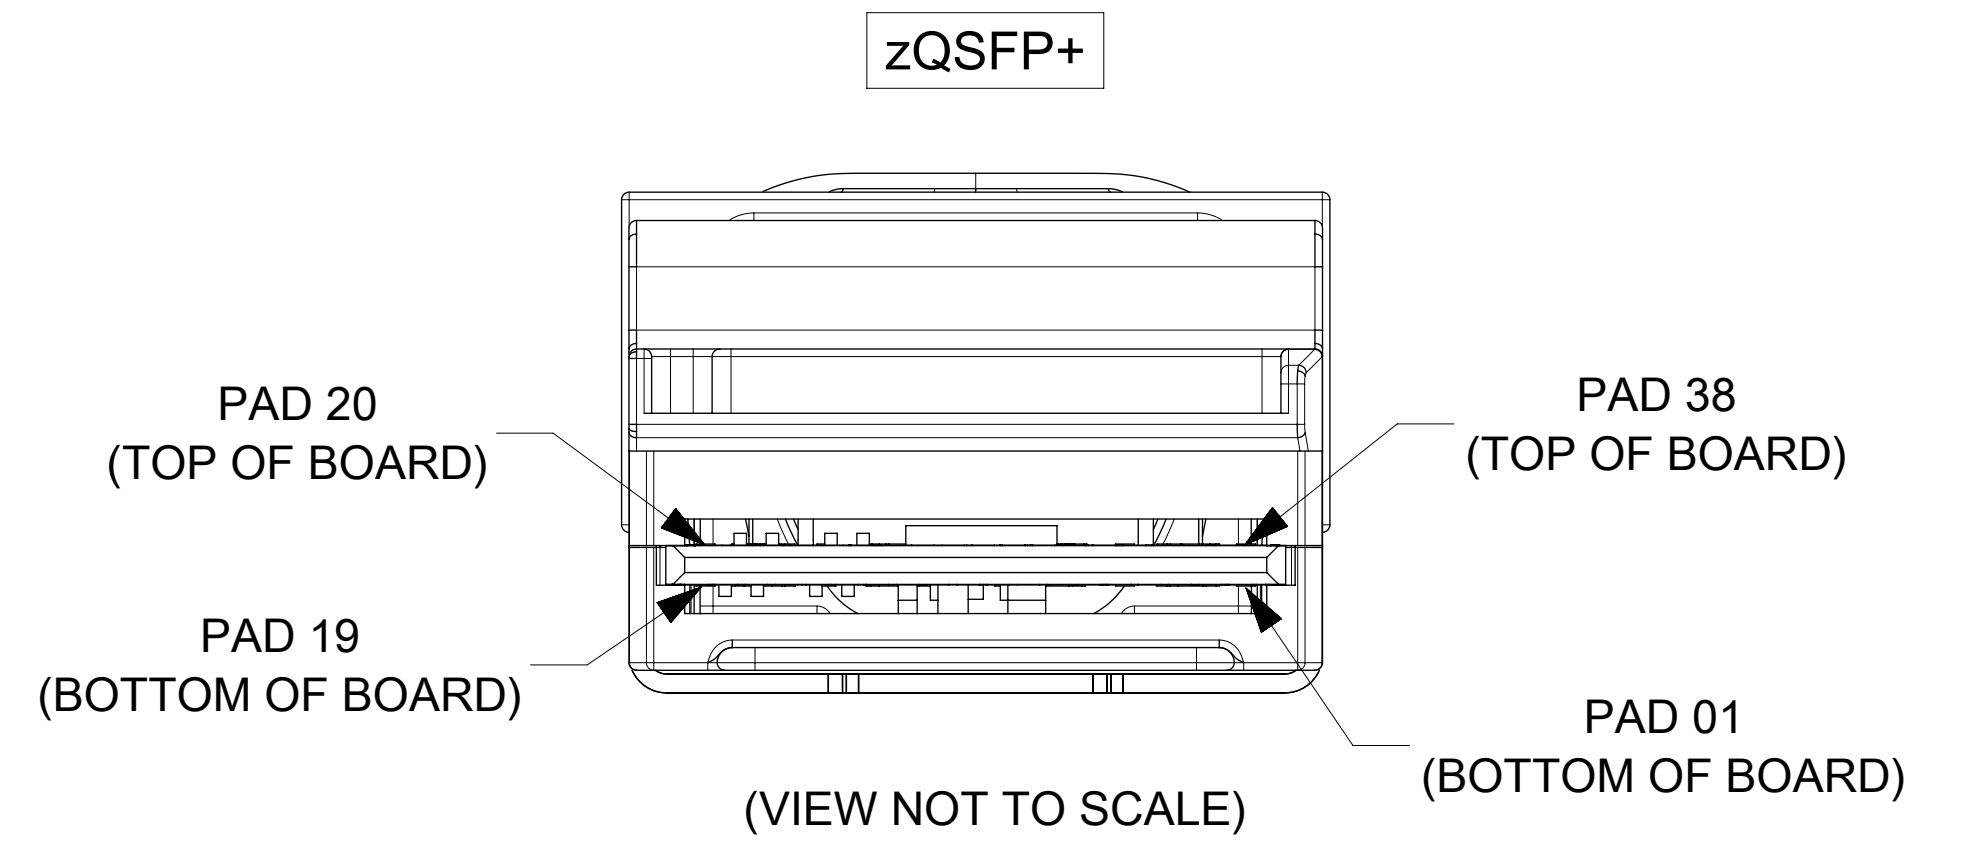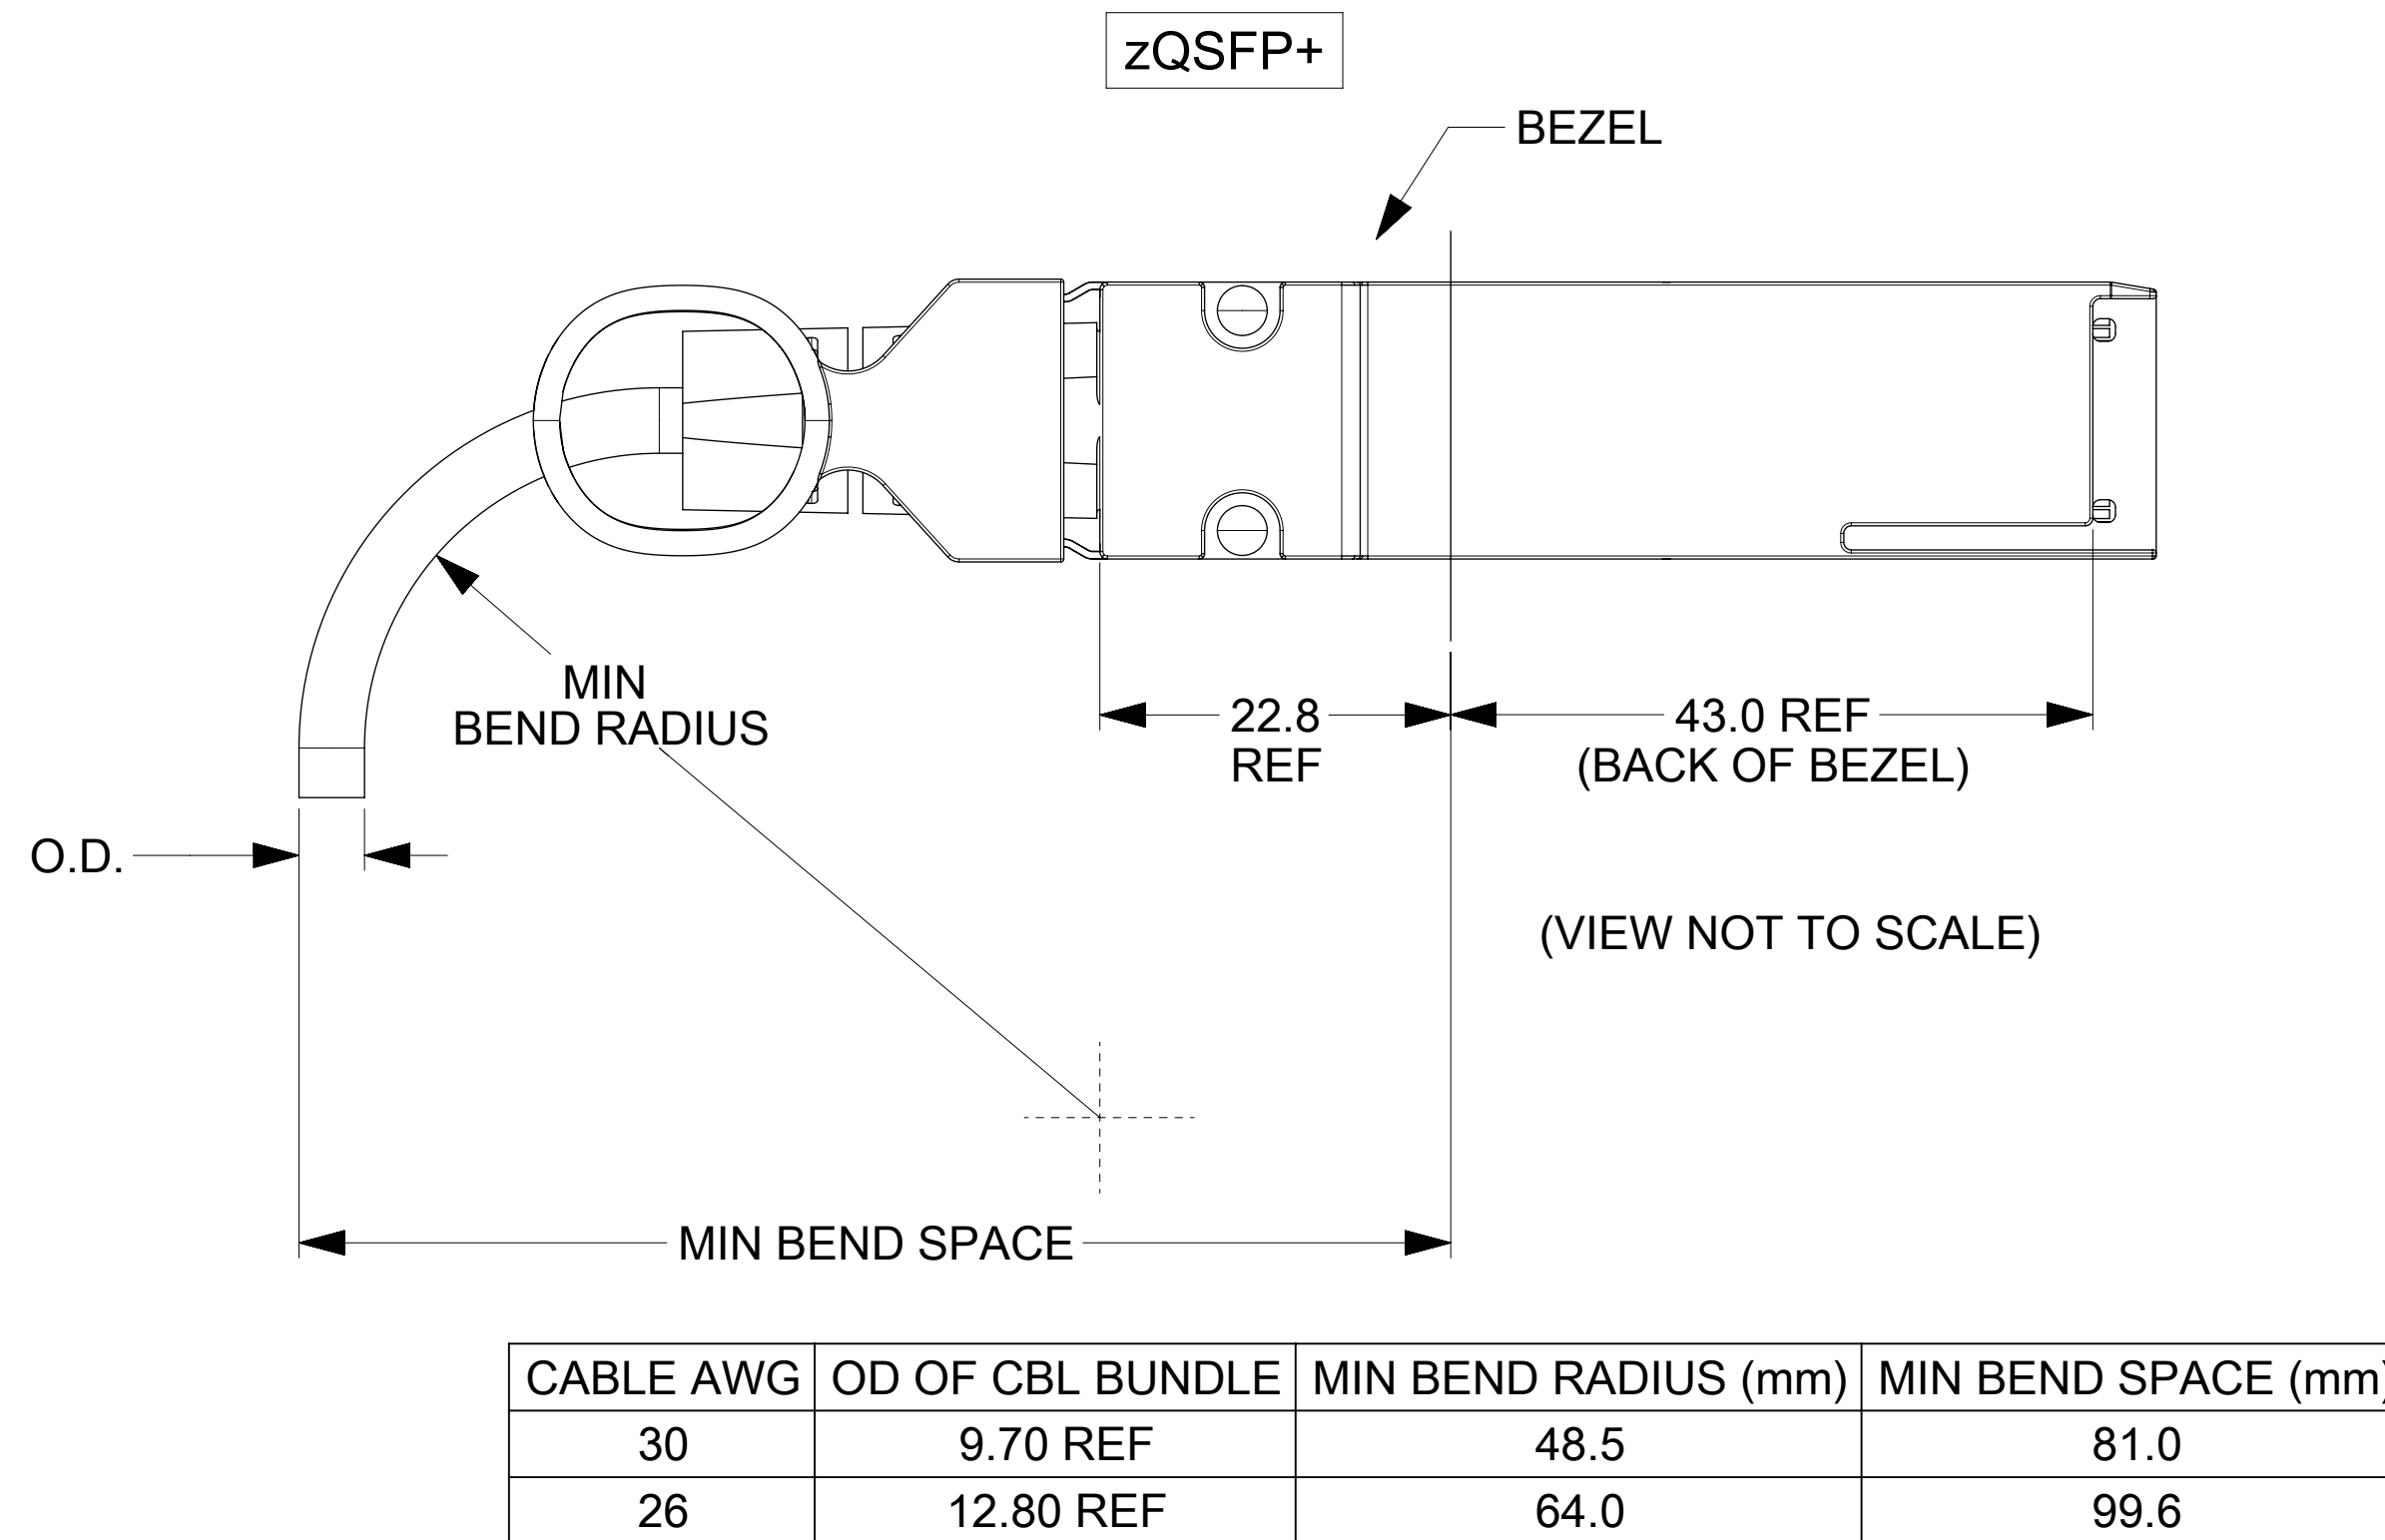

SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC: UPDATED LABEL DIM	
	DIMENSION UNITS	SCALE		
▽ = 0	mm			
▽ = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)			
▽ = 0	ANGULAR TOL	± 1.0°	EC NO: 607196	
▽ = 0	4 PLACES	±	DRWN: GSARVADE	2018/10/31
▽ = 0	3 PLACES	±	CHK'D: GSARVADE	2018/11/08
▽ = 0	2 PLACES	± 0.13	APPR: KNAGANNA	2018/11/08
▽ = 0	1 PLACE	± 0.25	INITIAL REVISION:	
▽ = 0	0 PLACES	±	DRWN: BCHEN06	2017/01/10
▽ = 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPR: ADTUCKER	2017/01/18
▽ = 0	THIRD ANGLE PROJECTION		DRAWING	SERIES
		⊕	D-SIZE	100345
DOCUMENT STATUS		P1	RELEASE DATE	2018/11/08 09:49:32


ZQSFP+ TO 4ZSFP+ 25G CBL ASSY

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
1003450001	PSD	000	G


MATERIAL NUMBER: 100345    CUSTOMER: GENERAL MARKET    SHEET NUMBER: 2 OF 3

MOLEX P/N	CABLE LENGTH (M)	CABLE L'TH TOL (mm)	AWG	CBL MFG
1003451051	0.5	±30	30	TEMPFLEX
1003451101	1.0	±50	30	TEMPFLEX
1003451151	1.5	±50	30	TEMPFLEX
1003451201	2.0	±50	30	TEMPFLEX
1003451251	2.5	±50	30	TEMPFLEX
1003451301	3.0	±50	30	TEMPFLEX
1003453301	3.0	±50	26	TEMPFLEX
1003453351	3.5	±50	26	TEMPFLEX
1003453401	4.0	±50	26	TEMPFLEX
1003453451	4.5	±50	26	TEMPFLEX
1003453501	5.0	±80	26	TEMPFLEX

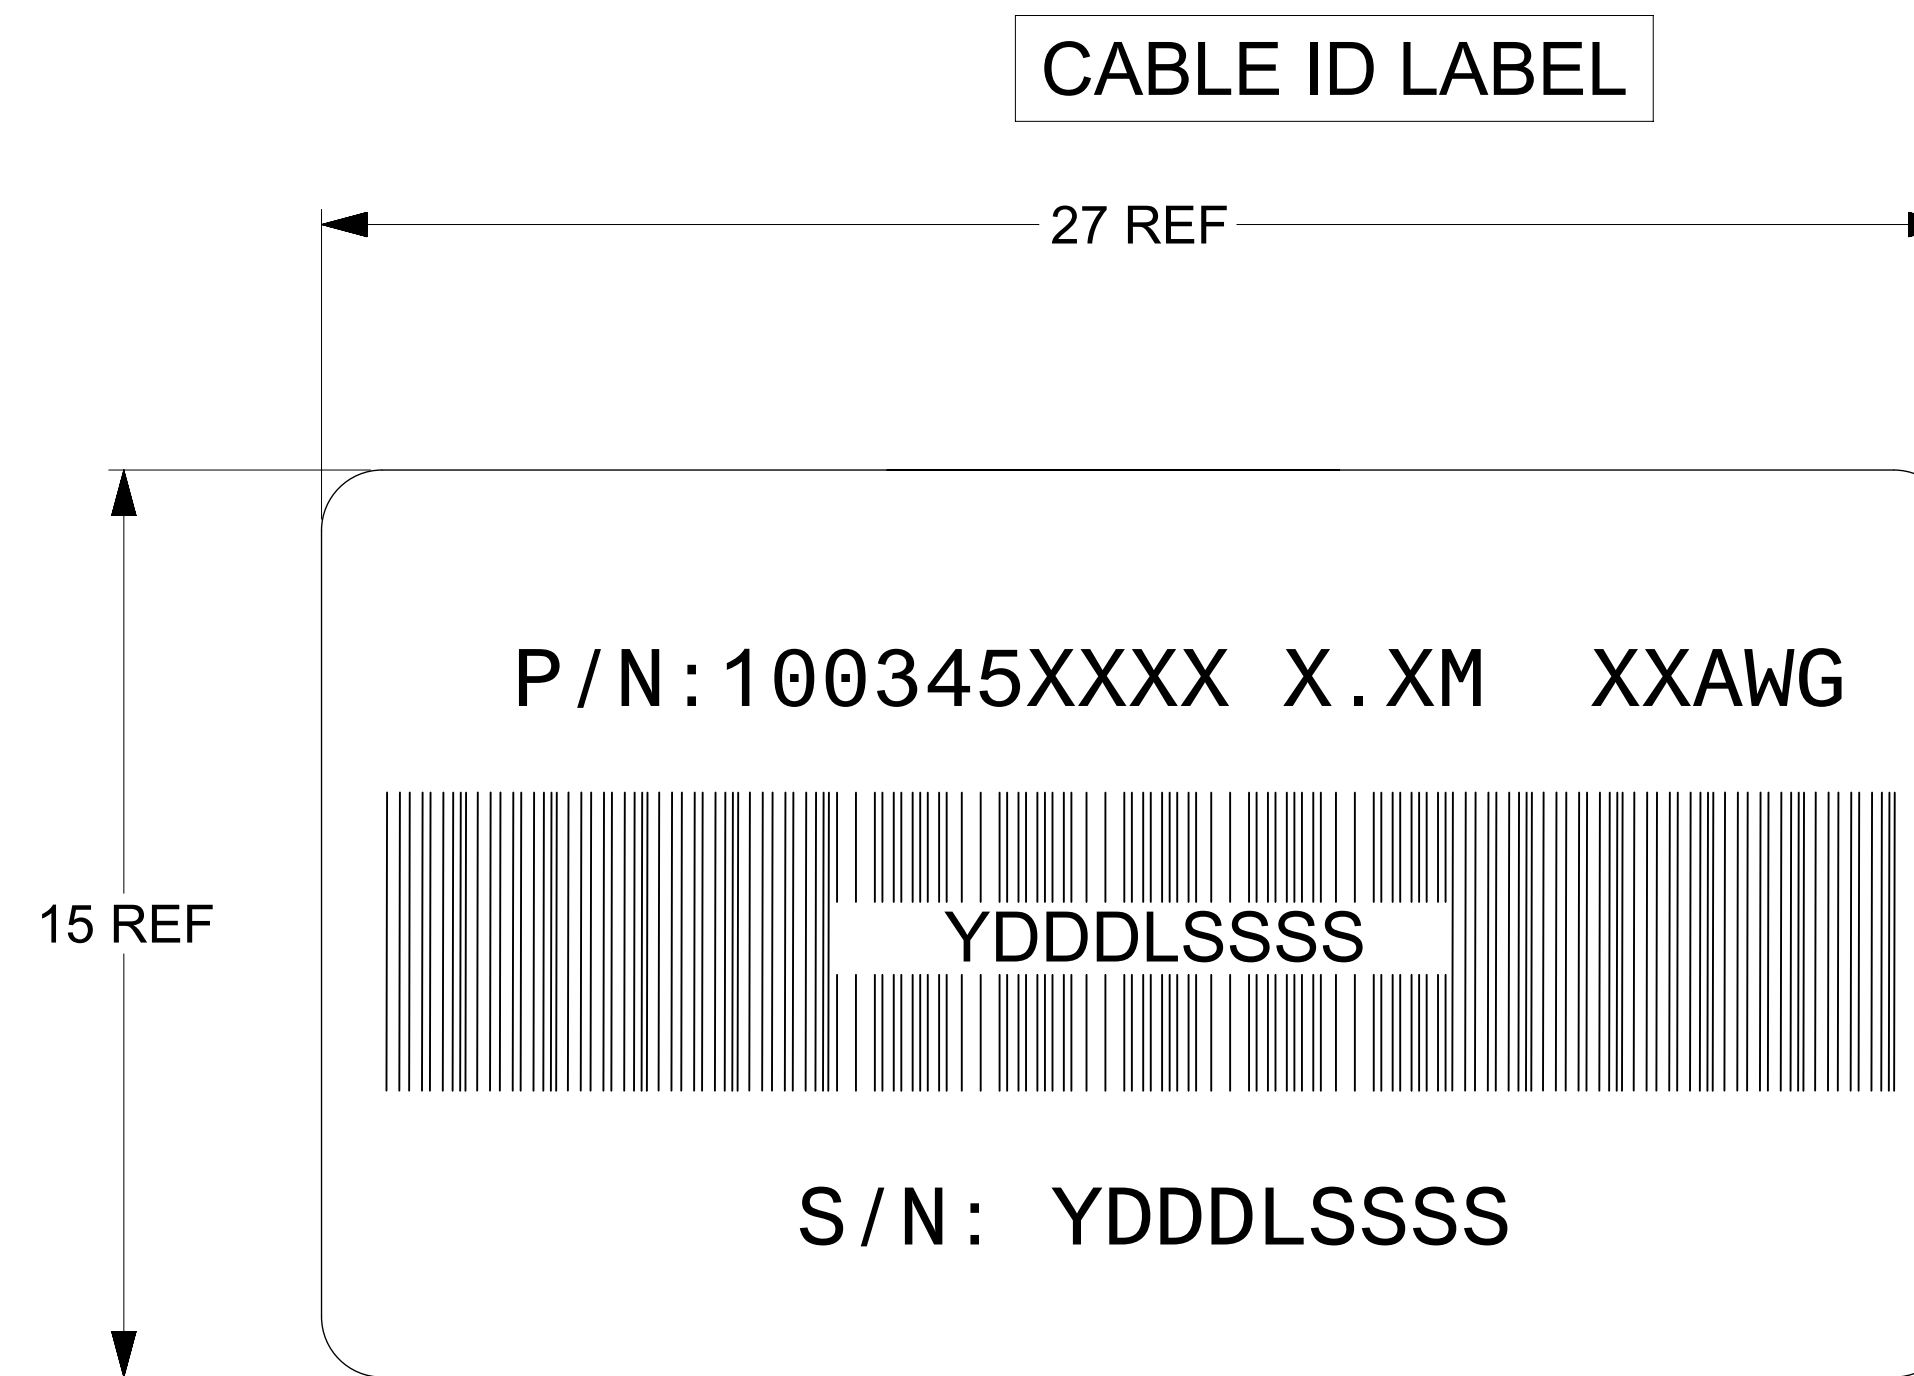

P/N (SEE P/N TABLE)  
X.XM = LENGTH AS SHOWN IN TABLE  
XXAWG = AWG SIZE

YDDLSSSS  
Y = LAST DIGIT OF THE YEAR  
DDD = DAY OF THE YEAR  
L = LOCATION  
1 = US  
2 = MEXICO  
3 = CHINA  
4 = PHILIPPINES  
SSSS = (0001-9999)

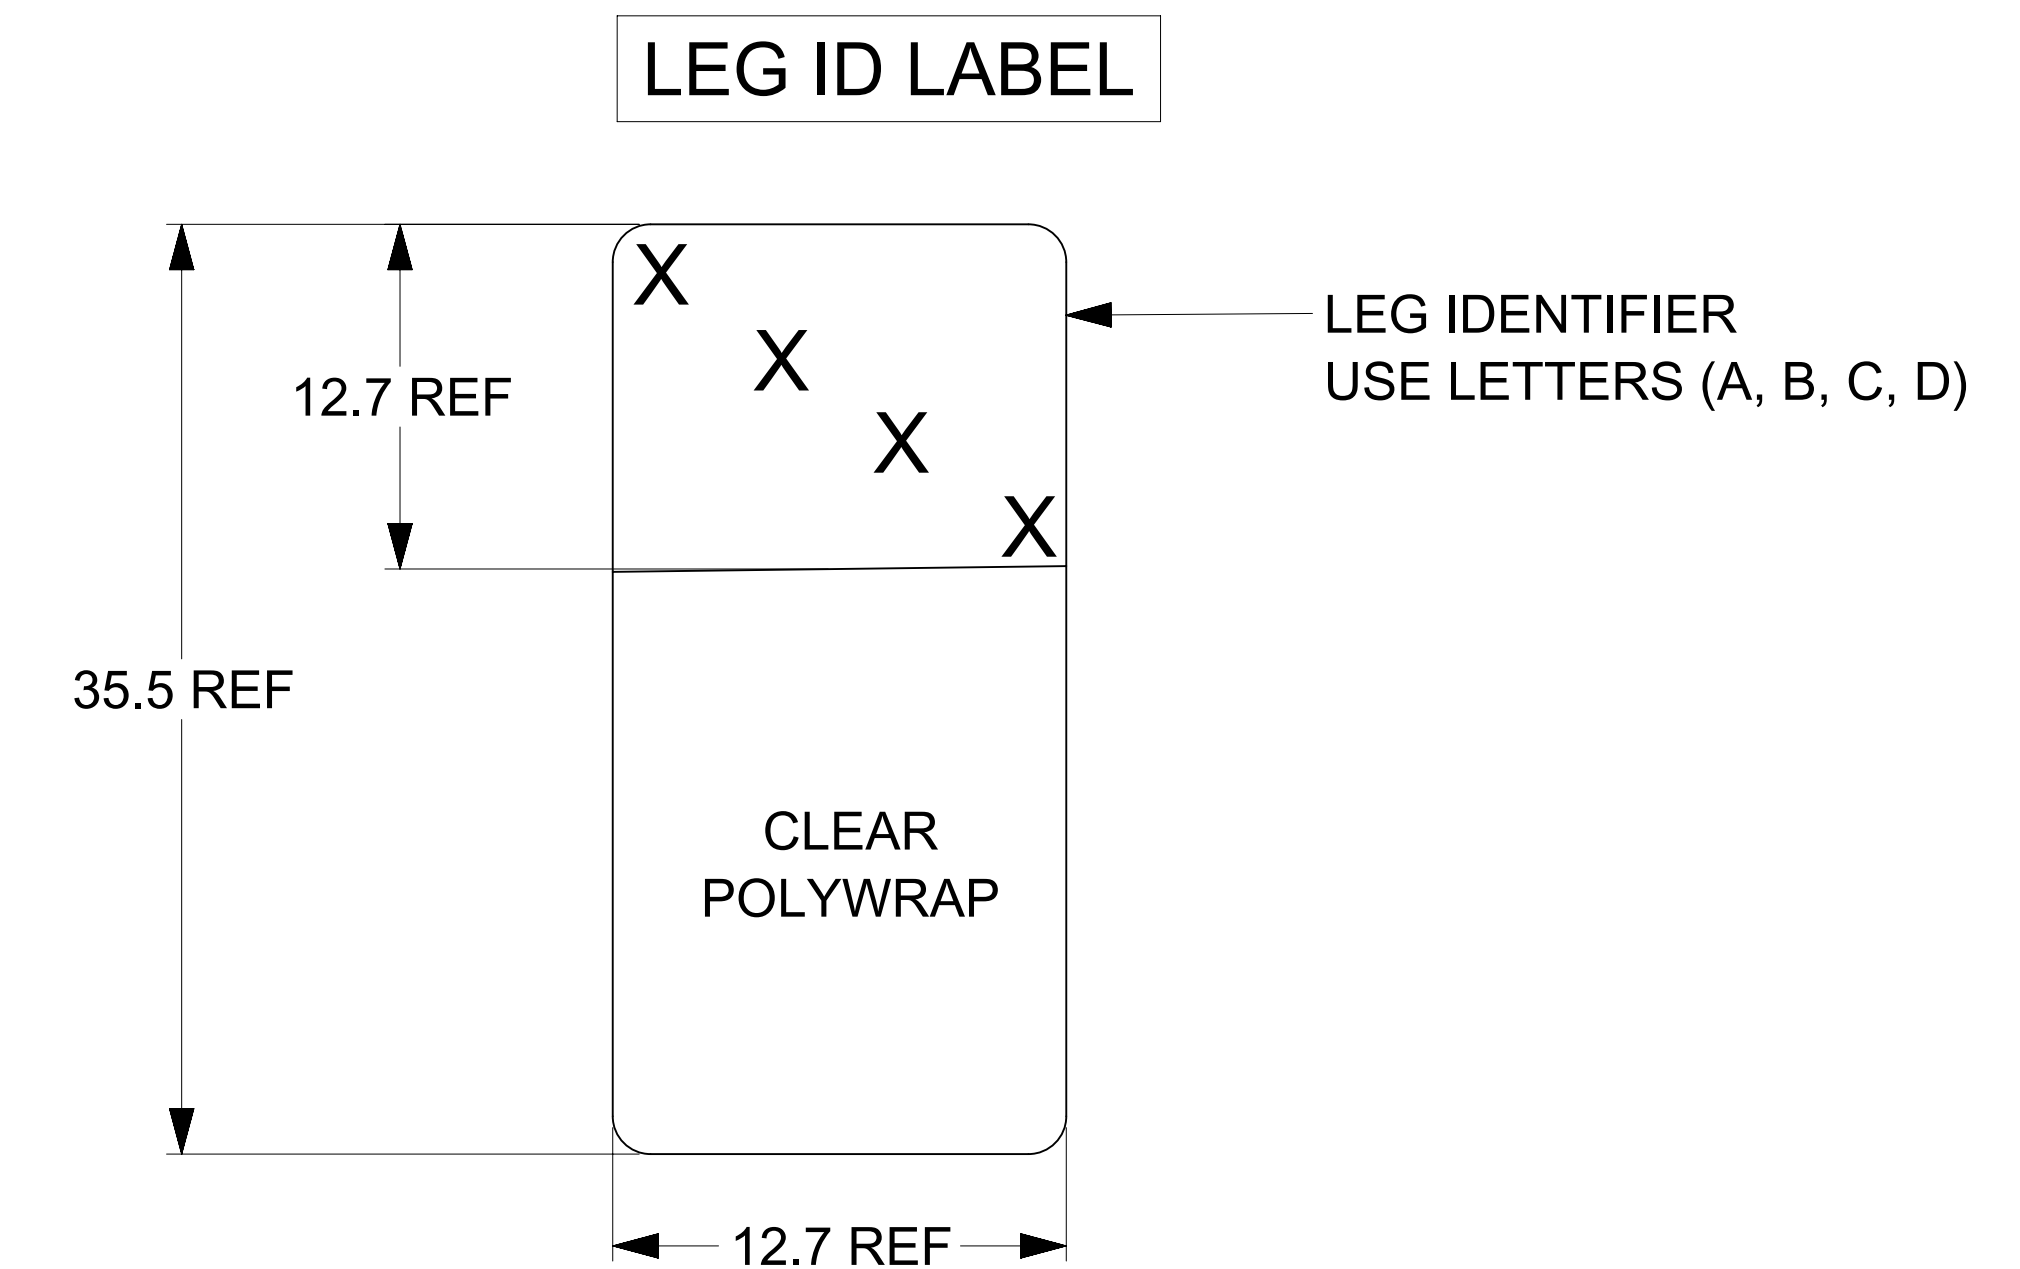

LEG IDENTIFIER  
USE LETTERS (A, B, C, D)

SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			<b>molex</b>			
	DIMENSION UNITS	SCALE	CURRENT REV DESC: UPDATED LABEL DIM				ZQSFP+ TO 4ZSFP+ 25G CBL ASSY
	mm			PRODUCT CUSTOMER DRAWING			
	GENERAL TOLERANCES (UNLESS SPECIFIED)			EC NO: 607196	DOCUMENT NUMBER		
ANGULAR TOL ± 1.0°	4 PLACES ±	3 PLACES ±	DRWN: GSARVADE 2018/10/31	2017/01/18	PSD	000	G
2 PLACES ± 0.13	1 PLACE ± 0.25	0 PLACES ±	CHK'D: GSARVADE 2018/11/08	REVISION			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			APPR: KNAGANNA 2018/11/08	1003450001			
THIRD ANGLE PROJECTION			INITIAL REVISION:	MATERIAL NUMBER			
D-DRAWING			DRWN: BCHEN06 2017/01/10	CUSTOMER			
D-DRAWING			APPR: ADTUCKER 2017/01/18	GENERAL MARKET			
D-DRAWING			SERIES	SHEET NUMBER			
D-DRAWING			D-SIZE 100345	3 OF 3			

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Ethernet Cables / Networking Cables](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[0152660053](#) [603020002](#) [73-7797-25](#) [73-8890-10](#) [73-8890-14](#) [73-8891-14](#) [73-8891-25](#) [73-8892-50](#) [73-8894-10](#) [73-8894-3](#) [73-8895-14](#) [73-8896-7](#) [MCJB2-10P6Q7-120](#) [84909-0204](#) [9QA0-111-12-3.00](#) [1200650742](#) [1200700174](#) [1200860368](#) [1200650013](#) [1201080008](#) [1-21919-1](#) [1300500373](#) [1300101844](#) [1300101845](#) [130050-0004](#) [1300500014](#) [1410147](#) [E16A06002M030](#) [E200102-009-S1](#) [MT14-187L](#) [17-103530](#) [NK5EPC18RDY](#) [NK5EPC18VLY](#) [NK5EPC18YLY](#) [NK5EPC1GRY](#) [NK5EPC30BLY](#) [NK5EPC30VLY](#) [NK5EPC30YLY](#) [NK5EPC4Y](#) [NK5EPC6YLY](#) [NK5EPC8BLY](#) [NK5EPC9YLY](#) [NK6PC30BUY](#) [NK6PC30GRY](#) [NK6PC30RDY](#) [NK6PC30Y](#) [NK6PC30YLY](#) [1969343-6](#) [C501100010](#) [C501106002](#)