

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [105311102](#)
Status: **Active**
Overview: [Nano-Fit Power Connectors](#)
Description: Nano-Fit Vertical Header, Through Hole, 2.50mm Pitch, Single Row, 2 Circuits, with Solder Clips, Tin (Sn) Plating, Black, Glow-Wire Capable

Documents:

3D Model (PDF)	Product Specification PS-105300-100-001 (PDF)
3D Model	Application Specification AS-105300-100-001 (PDF)
Drawing (PDF)	Packaging Specification PK-105309-300-000 (PDF)
Product Specification 1053001000-PS-CH-000 (PDF)	Test Summary 1053001000-TS-000 (PDF)
Product Specification 1053001000-PS-ES-000 (PDF)	Datasheet (PDF)
Product Specification 1053001000-PS-JP-000 (PDF)	Symbol Footprint Data SYM-105311-XX02-001 (PDF)
Product Specification 1053001000-PS-SK-000 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification


CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	105311
Application	Power, Wire-to-Board
Overview	Nano-Fit Power Connectors
Packaging Alternative	1053113502
Product Name	Nano-Fit
UPC	887191931401

Physical

Breakaway	No
Circuits (Loaded)	2
Circuits (maximum)	2
Color - Resin	Black
Durability (mating cycles max)	25
Flammability	94V-0
Glow-Wire Capable	Yes
Guide to Mating Part	No
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Liquid Crystal Polymer
Net Weight	0.390/g
Number of Rows	1
Orientation	Vertical
PC Tail Length	3.20mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm, 2.40mm
Packaging Type	Tray
Pitch - Mating Interface	2.50mm
Pitch - Termination Interface	2.50mm
Plating min - Mating	1.524µm
Plating min - Termination	1.524µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes

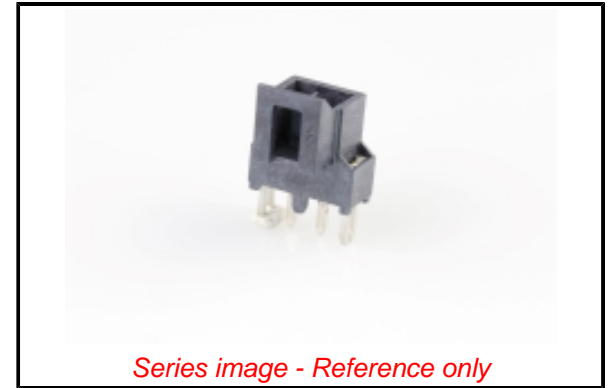

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2021)4569-DC (8
July 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[105311 Series](#)

Mates With

Nano-Fit Receptacle Housing [1053071202](#)
. Nano-Fit Overmolded Cable Assembly
[245130](#)

Shrouded	Yes
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	7.5A
Voltage - Maximum	250V AC (RMS)/DC
Material Info	
Reference - Drawing Numbers	
Application Specification	AS-105300-100-001
Packaging Specification	PK-105309-300-000
Product Specification	1053001000-PS-CH-000, 1053001000-PS-ES-000, 1053001000-PS-JP-000, 1053001000-PS-SK-000, PS-105300-100-001
Sales Drawing	SD-105311-100-000
Symbol/Footprint Data	SYM-105311-XX02-001
Test Summary	1053001000-TS-000

This document was generated on 10/05/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-](#)
[010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-](#)
[5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-](#)
[360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#)
[801-43-006-10-002000](#)