


SEC Z-Z  
FOR 3 POLE ONLY

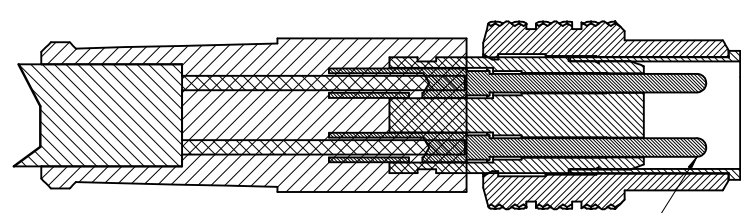

SEC Y-Y  
FOR 4-5 POLE ONLY

MALE INSERT FRONT VIEW		
3 POLE	4 POLE	5 POLE
1 BROWN 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK	1 BROWN 2 WHITE 3 BLUE 4 BLACK 5 GREY

ENTER DESCRIPTION EC NO: MNA2009-0840 DRAWN: SG CHKD: APPR: JFMURPHY 2009/07/14 2009/07/20	QUALITY SYMBOLS ▽=0 ▽=0
	DESCRIPTION REV: A

GENERAL TOLERANCES (UNLESS SPECIFIED) 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± --- ± --- 1 PLACE ± --- ± --- ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS
---

DIMENSION STYLE IN/MM DRAWN BY NKUMAR01 CHECKED BY BWOODMAN APPROVED BY JFMURPHY	DATE 14/07/09 DATE 14/07/09 DATE 14/07/09
MATERIAL NO. SEE CHART	SHEET NO. 1 OF 2

SCALE 5:1 DESIGN UNITS INCH THIRD ANGLE PROJECTION	TITLE NC 3P M/MP 2M COUPLER 24AWG PV
MOLEX INCORPORATED	DOCUMENT NO. SD-120086-132

ASSEMBLY		
3 POLE	4 POLE	5 POLE

SL.No	DESCRIPTION	MATERIAL	FINISH	QTY		
1	STAMP & FORM CONTACT	COPPER ALLOY	GOLD PLATED	3		
2	SCREW MACHINE CONTACT	COPPER ALLOY	GOLD PLATED		4	5
3	SLEEVE	BRASS	NICKEL PLATED	1	1	1
4	COUPLING NUT	BRASS	NICKEL PLATED			
5	LABEL	PLASTIC FILM	BLACK/YELLOW			
6	OVER MOLD	TPE	YELLOW			
7	CABLE, 24 AWG, 3 CONDUCTOR	PVC JACKET	YELLOW	1		
	CABLE, 24 AWG, 4 CONDUCTOR	PVC JACKET	YELLOW		1	
	CABLE, 24 AWG, 5 CONDUCTOR	PVC JACKET	YELLOW			1
8	INSERT MALE 3 POLE	PUR	BLACK	1		
	INSERT MALE 4 POLE	PUR	BLACK		1	
	INSERT MALE 5 POLE	PUR	BLACK			1

PART NUMBER	DESCRIPTION	FINISHED LENGTH
1200860132	403006A10M020	2M +90MM -0 [6' 6" +3.5" -0]
1200860133	403006A10M040	4M +150MM -0 [13' 1" +6" -0]
1200860134	403006A10M050	5M +150MM -0 [16' 4" +6" -0]
1200860575	403006A10M060	6M +150MM -0 [19' 7" +6" -0]
1200860135	403006A10M100	10M +300MM -0 [32' 4" +12" -0]
1200860183	404006A10M020	2M +90MM -0 [6' 6" +3.5" -0]
1200860184	404006A10M040	4M +150MM -0 [13' 1" +6" -0]
1200860185	404006A10M050	5M +150MM -0 [16' 4" +6" -0]
1200860576	404006A10M060	6M +150MM -0 [19' 7" +6" -0]
1200860577	404006A10M100	10M +300MM -0 [32' 4" +12" -0]
1200860206	405006A10M020	2M +90MM -0 [6' 6" +3.5" -0]
1200860207	405006A10M040	4M +150MM -0 [13' 1" +6" -0]
1200860208	405006A10M050	5M +150MM -0 [16' 4" +6" -0]
1200860541	405006A10M060	6M +150MM -0 [19' 7" +6" -0]
1200860579	405006A10M100	10M +300MM -0 [32' 4" +12" -0]

<b>ENTER DESCRIPTION</b> EC NO: MNA2009-0840 DRAWN/SG: 2009/07/14 CHKD: APPR: JFMURPHY 2009/07/20	QUALITY SYMBOLS 	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE <b>IN/MM</b>		SCALE <b>5:1</b>	DESIGN UNITS <b>INCH</b>	THIRD ANGLE PROJECTION			
		4 PLACES ± --- ± ---	3 PLACES ± --- ± ---	DRAWN BY NKUMAR01	DATE 14/07/09	<b>NC 3P M/MP 2M COUPLER 24AWG PV</b>					
		2 PLACES ± --- ± ---	1 PLACE ± --- ± ---	CHECKED BY BWOODMAN	DATE 14/07/09						
		ANGULAR ±1/2°		APPROVED BY JFMURPHY		DATE 14/07/09	<b>MOLEX INCORPORATED</b>				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. <b>9999999999</b>		DOCUMENT NO. <b>SD-120086-132</b>		SHEET NO. <b>2 OF 2</b>					

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Sensor Cables / Actuator Cables](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[1300070444](#) [43-10984](#) [M83513/19-F01CP](#) [704000D02F120](#) [MDM15SH001K](#) [MDM25PH003BF222](#) [802027107404-1](#) [885030A09M010](#)  
[885030A09M020](#) [1200650174](#) [1200651332](#) [1200651713](#) [1200660171](#) [1200660208](#) [1200660343](#) [1200660804](#) [1200660845](#) [1200660926](#)  
[1200660977](#) [1200661173](#) [1200661354](#) [120066-1712](#) [1200720053](#) [1200720099](#) [1200720153](#) [1200720172](#) [1200720217](#) [1200720226](#)  
[1200720251](#) [1200720285](#) [1200720296](#) [1200720404](#) [1200730148](#) [1200730378](#) [1200800231](#) [1200860112](#) [1200860121](#) [1200860125](#)  
[1200860337](#) [1200860365](#) [1200860420](#) [1200870046](#) [1200870248](#) [1200980102](#) [1200660181](#) [1200660183](#) [1200660827](#) [1200660849](#)  
[1200661170](#) [1200661295](#)