
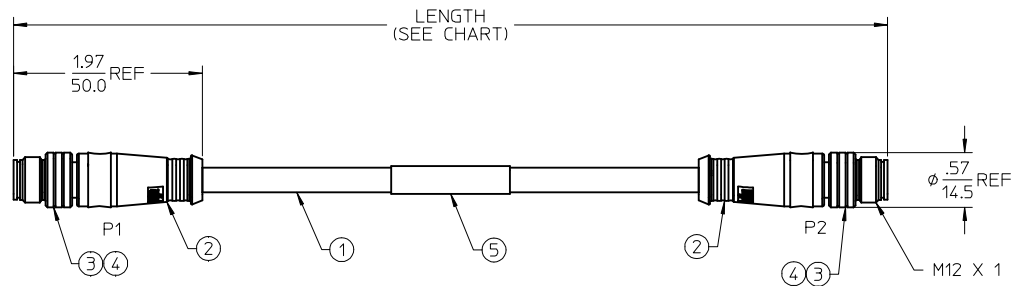
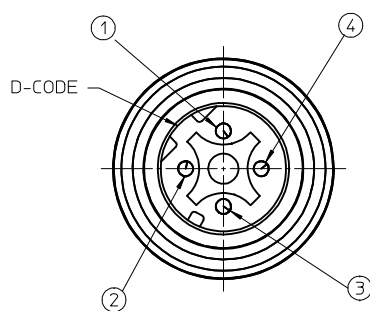


MATERIAL NUMBER	ENGINEERING NO.	LENGTH
1300480088	E11A06003M010	3'3" +1.75 - 0 [1M +44.5MM - 0]
1300480090	E11A06003M050	16'4" +6.0 - 0 [5M +150.0MM - 0]



P1		P2
1	ORANGE	1
2	BLUE	2
3	OR/WHITE	3
4	BLUE/WHITE	4

WIRING DIAGRAM

- NOTES:
- 1) MATERIAL: SEE TABLE
  - 2) FINISHES: SEE TABLE
  - 4) MATES WITH: MICRO CHANGE, 4 POLE RECEPTACLE
  - 5) ELECTRICAL DATA:  
 ACCORDING TO CAT5e ETHERNET STANDARD  
 INLINE CORDSET  
 MALE D-CODING TO MALE D-CODING  
 24AWG  
 POLES: 4  
 MAX. VOLTAGE: 250V  
 MAX. CURRENT 4A  
 CONTACT RESISTANCE: <math><5m \text{ Ohm}</math>  
 INSULATION WITHSTAND: >100M Ohm  
 TEMPERATURE RANGE: -25°C TO 75°C  
 PROTECTION IP67  
 UL E200650
  - 6) PACKAGING:  
 CABLE ASSEMBLIES ARE BAGGED SEPERATELY  
 IN POLY BAGS WITH BAR CODE LABEL ATTACHED  
 TO OUTSIDE OF BAG.
  - 7) ASSEMBLY IS RoHS COMPLIANT.

SALES DRAWING

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
5	1	LABEL	PLASTIC FILM	BLACK/YELLOW
4	8	MALE TERMINAL	COPPER ALLOY	GOLD PLATED
3	2	M12 ULTRA LOCK HEAD ASSY	TPE	BLACK
2	2	OVERMOLD	PUR	BLACK
1	1	ETHERNET CABLE-CAT5e	PVC JACKET	TEAL

RELEASE DWG EC NO: WNA2009-0650 DRWN: BRUPERT 2009/04/02 CHKD: WOODMAN APPR: J. MURPHY 2009/04/08	QUALITY SYMBOLS
	$\nabla = 0$ $\nabla = 0$
	DESCRIPTION
	REV

GENERAL TOLERANCES (UNLESS SPECIFIED)															
<table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td><math>\pm .005</math></td> <td><math>\pm .0005</math></td> </tr> <tr> <td>3 PLACES</td> <td><math>\pm .005</math></td> <td><math>\pm .020</math></td> </tr> <tr> <td>2 PLACES</td> <td><math>\pm 0.51</math></td> <td><math>\pm .005</math></td> </tr> <tr> <td>1 PLACE</td> <td><math>\pm .005</math></td> <td><math>\pm .005</math></td> </tr> </tbody> </table>		mm	INCH	4 PLACES	$\pm .005$	$\pm .0005$	3 PLACES	$\pm .005$	$\pm .020$	2 PLACES	$\pm 0.51$	$\pm .005$	1 PLACE	$\pm .005$	$\pm .005$
	mm	INCH													
4 PLACES	$\pm .005$	$\pm .0005$													
3 PLACES	$\pm .005$	$\pm .020$													
2 PLACES	$\pm 0.51$	$\pm .005$													
1 PLACE	$\pm .005$	$\pm .005$													
ANGULAR $\pm 1^\circ$															
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS															

DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
IN/MM		1:1	INCH	
DRAWN BY	DATE	TITLE		
B. RUPERT	04/01/09	MIC 4P M/MP ST/ST D-CODED		
CHECKED BY	DATE			
WOODMAN	04/01/09	<b>MOLEX INCORPORATED</b>		
APPROVED BY	DATE			
MURPHY	04/01/09	MATERIAL NO. <b>1300480088</b> DOCUMENT NO. <b>SD-130048-088</b> SHEET NO. <b>1 OF 1</b>		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Sensor Cables / Actuator Cables](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[60963](#) [60964](#) [703000D02F2002](#) [703001D02F0602](#) [703001D02F300](#) [704000D02F120](#) [773032K02F030](#) [802027107404-1](#) [802027213811-1](#)  
[804001A09M150](#) [805001A09M0502](#) [84914-0235](#) [84914-0237](#) [885030A09M020](#) [8R4J30E03C3003](#) [1200651332](#) [1200651713](#) [1200660844](#)  
[1200660845](#) [1200661173](#) [1200680071](#) [1200720053](#) [1200720081](#) [1200720099](#) [1200720217](#) [1200800231](#) [1200860125](#) [1200870123](#)  
[1200980102](#) [1200650267](#) [1200650298](#) [1200660183](#) [1200660782](#) [1200660849](#) [1200661295](#) [1200661297](#) [1200661342](#) [1200661343](#)  
[1200670080](#) [1200670220](#) [1200680331](#) [1200720252](#) [1200730184](#) [1200860344](#) [1200870359](#) [1200870643](#) [1200980008](#) [1200980031](#)  
[1210502211](#) [1210400542](#)