

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1511200014](#)

Status: **Active**

Overview: [Milli-Grid Connector System](#)

Description: 2.00mm Pitch, Milli-Grid PCB Header, Dual Row, Right-Angle, Surface Mount, 2.00µm Tin (Sn) Plating, without Peg, without Pick and Place Tape, 14 Circuits, Glow-Wire Capable, Tape and Reel

Documents:

[3D Model \(PDF\)](#)

[3D Model](#)

[Drawing \(PDF\)](#)

[Product Specification PS-151117-0001-001 \(PDF\)](#)

[Application Specification 503940001-AS-000 \(PDF\)](#)

[Application Specification 503940002-AS-000 \(PDF\)](#)

[Packaging Specification PK-151120-3000-001 \(PDF\)](#)

[Datasheet \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	151120
Application	Board-to-Board, Signal, Wire-to-Board
Overview	Milli-Grid Connector System
Product Name	Milli-Grid
UPC	889056761567

Physical

Breakaway	No
Circuits (Loaded)	14
Circuits (maximum)	14
Color - Resin	Black
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	Yes
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Liquid Crystal Polymer
Net Weight	0.822/g
Number of Rows	2
Orientation	Right Angle
PCB Locator	No
PCB Retention	None
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	2.00mm
Pitch - Termination Interface	2.00mm
Plating min - Mating	2.000µm
Plating min - Termination	2.000µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Yes
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-55° to +105°C

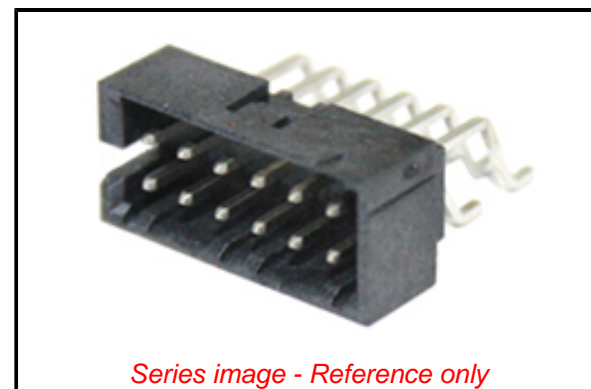

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2021)4569-DC (8
July 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[151120 Series](#)

Mates With

Milli-Grid Receptacle Housing [151192](#) ,
[51110](#)
Milli-Grid PCB Receptacles
[78787](#) , [78788](#) , [79107](#) , [79109](#)

Termination Interface: Style Surface Mount

Electrical

Current - Maximum per Contact 2.0A
Voltage - Maximum 125V AC

Solder Process Data

Duration at Max. Process Temperature (seconds) 011
Lead-free Process Capability SMC&WAVE
Max. Cycles at Max. Process Temperature 001
Process Temperature max. C 265

Material Info

Reference - Drawing Numbers

Application Specification 503940001-AS-000, 503940002-AS-000
Packaging Specification PK-151120-3000-001
Product Specification PS-151117-0001-001
Sales Drawing SD-151120-0001-001

This document was generated on 09/02/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-](#)
[5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-](#)
[367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)