

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0015249184](#)
Status: **Active**
Overview: [Mini-Fit Family Power Connectors](#)
Description: Mini-Fit BMI Header, Dual Row, Right-Angle, with Snap-in Plastic Peg PCB Lock, 18 Circuits, PA Polyamide Nylon 6/6, UL 94V-0, with Tin (Sn) Plating

Documents:

| | |
|--|--|
| Drawing (PDF) | Product Specification PS-5556-002-001 (PDF) |
| 3D Model (PDF) | Application Specification 424040001-AS-000 (PDF) |
| 3D Model | Packaging Specification PK-42404-002-001 (PDF) |
| Product Specification 55560002-PS-CH-000 (PDF) | Test Summary TS-42404-001-001 (PDF) |
| Product Specification 55560002-PS-ES-000 (PDF) | Test Summary TS-5556-002-001 (PDF) |
| Product Specification 55560002-PS-SK-000 (PDF) | Symbol Footprint Data SYM-A42404-18XX-001 (PDF) |
| Product Specification PS-45750-001-001 (PDF) | RoHS Certificate of Compliance (PDF) |

Agency Certification

| | |
|-----|---------|
| CSA | LR19980 |
| UL | E29179 |


General

| | |
|----------------|--|
| Product Family | PCB Headers |
| Series | 42404 |
| Application | Board-to-Board, Power, Wire-to-Board |
| Comments | Current = 13A max. per circuit when header is mated to a receptacle loaded with 45750 Mini-Fit Plus HCS Crimp Terminal Crimped to 16 AWG wire., See Molex product specification PS-45750-001 for additional current de-rating information. |

| | |
|--------------|--|
| Overview | Mini-Fit Family Power Connectors |
| Product Name | Mini-Fit BMI |
| UPC | 800753684263 |

Physical

| | |
|--------------------------------|-----------------|
| Breakaway | No |
| Circuits (Loaded) | 18 |
| Circuits (maximum) | 18 |
| Color - Resin | Natural (White) |
| Durability (mating cycles max) | 30 |
| Flammability | 94V-0 |
| Glow-Wire Capable | No |
| Guide to Mating Part | Yes |
| Lock to Mating Part | Yes |
| Material - Metal | Brass |
| Material - Plating Mating | Tin |
| Material - Plating Termination | Tin |
| Material - Resin | Nylon |
| Net Weight | 7.033/g |
| Number of Rows | 2 |
| Orientation | Right Angle |
| PC Tail Length | 3.30mm |
| PCB Locator | Yes |
| PCB Retention | Yes |
| PCB Thickness - Recommended | 1.80mm |
| Packaging Type | Tray |
| Pitch - Mating Interface | 4.20mm |
| Plating min - Mating | 2.540µm |
| Plating min - Termination | 2.540µm |

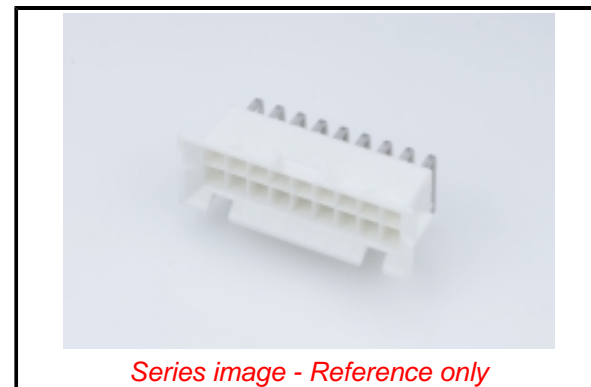

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2021)4569-DC (8
July 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[42404](#) Series

Mates With

[15060181](#) Mini-Fit BMI Panel Mount Receptacle, [39012185](#) Mini-Fit Jr. Receptacle, [15247181](#) Mini-Fit BMI Vertical Receptacle Header, [445160009](#) Mini-Fit BMI Slide-and-Lock Panel Mount Receptacle

| | |
|--------------------------------|----------------|
| Polarized to Mating Part | Yes |
| Polarized to PCB | Yes |
| Shrouded | Partial |
| Stackable | No |
| Surface Mount Compatible (SMC) | No |
| Temperature Range - Operating | -40° to +105°C |
| Termination Interface: Style | Through Hole |

Electrical

| | |
|-------------------------------|-------|
| Current - Maximum per Contact | 13.0A |
| Voltage - Maximum | 600V |

Solder Process Data

| | |
|--|------|
| Duration at Max. Process Temperature (seconds) | 005 |
| Lead-free Process Capability | WAVE |
| Max. Cycles at Max. Process Temperature | 001 |
| Process Temperature max. C | 240 |

Material Info

| | |
|--------------------|--------------|
| Engineering Number | A-42404-18B1 |
|--------------------|--------------|

Reference - Drawing Numbers

| | |
|---------------------------|---|
| Application Specification | 424040001-AS-000 |
| Packaging Specification | PK-42404-002-001 |
| Product Specification | 55560002-PS-CH-000, 55560002-PS-ES-000, 55560002-PS-SK-000, PS-45750-001-001, PS-5556-002-001 |
| Sales Drawing | SDA-42404-XXXX-001 |
| Symbol/Footprint Data | SYM-A42404-18XX-001 |
| Test Summary | TS-42404-001-001, TS-5556-002-001 |

This document was generated on 12/15/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)