

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0015913053](#)  
**Status:** **Active**  
**Overview:** SL Modular Connectors  
**Description:** 2.54mm Pitch SL Wire-to-Board Header, Low Profile, Surface Mount, Single Row, Right-Angle, 3.05mm Pocket, Shrouded, with Press-fit Plastic Peg, 5 Circuits, 0.76µm Gold (Au) Selective Plating, Tin (Sn) PC Tail Plating  
**Replacement Part Number :** <http://www.molex.com/molex/search/partSearch?pQuery=&sType=p&query=17197702051719770205> (drop-in)

**Documents:**

|  |  |
|--|--|
| <a href="#">3D Model</a>                                 | <a href="#">Product Specification PS-70541-001 (PDF)</a>       |
| <a href="#">Drawing (PDF)</a>                            | <a href="#">Packaging Specification PK-70873-016-001 (PDF)</a> |
| <a href="#">3D Model (PDF)</a>                           | <a href="#">Test Summary TS-70541-100-001 (PDF)</a>            |
| <a href="#">Product Specification PS-70400-001 (PDF)</a> | <a href="#">RoHS Certificate of Compliance (PDF)</a>           |

**Agency Certification**


|     |         |
|-----|---------|
| CSA | LR19980 |
| UL  | E29179  |

**General**

|                         |                                       |
|-------------------------|---------------------------------------|
| Product Family          | PCB Headers                           |
| Series                  | 70634                                 |
| Application             | Signal, Wire-to-Board                 |
| Overview                | <a href="#">SL Modular Connectors</a> |
| Product Name            | SL                                    |
| Replacement Part Number | 1719770205 (drop-in)                  |
| UPC                     | 800753772175                          |

**Physical**

|                                |                                |
|--------------------------------|--------------------------------|
| Breakaway                      | No                             |
| Circuits (Loaded)              | 5                              |
| Circuits (maximum)             | 5                              |
| Color - Resin                  | Black                          |
| Durability (mating cycles max) | 50                             |
| Flammability                   | 94V-0                          |
| Glow-Wire Capable              | No                             |
| Lock to Mating Part            | Yes                            |
| Material - Metal               | Brass, Phosphor Bronze         |
| Material - Plating Mating      | Gold                           |
| Material - Plating Termination | Tin                            |
| Material - Resin               | High Temperature Thermoplastic |
| Net Weight                     | 1.298/g                        |
| Number of Rows                 | 1                              |
| Orientation                    | Right Angle                    |
| PCB Locator                    | Yes                            |
| PCB Retention                  | Yes                            |
| PCB Thickness - Recommended    | 1.60mm                         |
| Packaging Type                 | Tube                           |
| Pitch - Mating Interface       | 2.54mm                         |
| Plating min - Mating           | 0.762µm                        |
| Plating min - Termination      | 1.905µm                        |
| Polarized to Mating Part       | Yes                            |
| Polarized to PCB               | Yes                            |
| Shrouded                       | Fully                          |
| Stackable                      | No                             |
| Temperature Range - Operating  | -40° to +105°C                 |
| Termination Interface: Style   | Surface Mount                  |

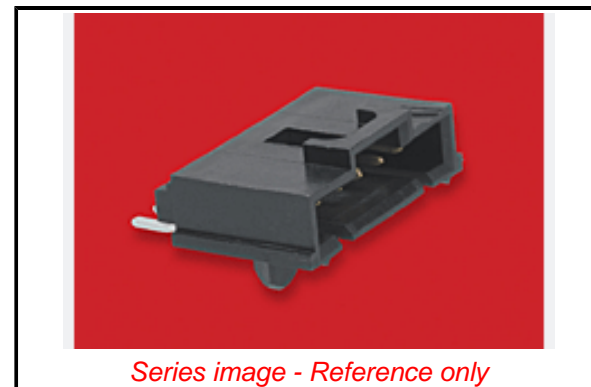

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2021)4569-DC (8  
July 2021)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[70634](#) Series

**Mates With**

SL Crimp Housing [70066](#) Option N, [70066](#) Option G, [70066](#) Option A, [70430](#) Option G, [70400](#) Option G

**Electrical**

Current - Maximum per Contact 3.0A  
Voltage - Maximum 250V

**Solder Process Data**

Lead-free Process Capability REFLOW  
Process Temperature max. C 260

**Material Info**

Engineering Number 70634-0074

**Reference - Drawing Numbers**

Packaging Specification PK-70873-016-001  
Product Specification PS-70400-001, PS-70541-001  
Sales Drawing 706340000-SD-000  
Test Summary TS-70541-100-001

This document was generated on 08/25/2021

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)  
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-](#)  
[5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-](#)  
[367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)