

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [1718131007](#)  
**Status:** **Active**  
**Overview:** [KK Interconnect Solutions](#)  
**Description:** 3.96mm Pitch, KK 396 RPC Vertical Header with Friction Lock, 15µm Gold (Au) Plating, Pin Length 17.02mm, Bag, 7 Circuits, without Pegs

**Documents:**

|  |   |
|--|---|
| <a href="#">3D Model</a>                                       | <a href="#">Packaging Specification PK-41791-001-001 (PDF)</a>  |
| <a href="#">3D Model (PDF)</a>                                 | <a href="#">Test Summary TS-171813-0001-001 (PDF)</a>           |
| <a href="#">Drawing (PDF)</a>                                  | <a href="#">Symbol Footprint Data SYM-171813-0007-001 (PDF)</a> |
| <a href="#">Product Specification PS-171813-0001-001 (PDF)</a> | <a href="#">RoHS Certificate of Compliance (PDF)</a>            |
| <a href="#">Product Specification PS-171813-0002-001 (PDF)</a> |   |

**Agency Certification**


|     |         |
|-----|---------|
| CSA | LR19980 |
| UL  | E29179  |

**General**

|                |   |
|----------------|---|
| Product Family | PCB Headers   |
| Series         | <a href="#">171813</a>  |
| Application    | Board-to-Board, Power, Signal, Wire-to-Board  |
| Comments       | See Product Specification for maximum current rating by material, AWG, and orientation.<br><br>See Product Specification for operating temperature range by material. |
| Overview       | <a href="#">KK Interconnect Solutions</a>   |
| Product Name   | KK 396  |
| UPC            | 887191429281  |

**Physical**

|                                |                                |
|--------------------------------|--------------------------------|
| Breakaway                      | No                             |
| Circuits (Loaded)              | 7                              |
| Circuits (maximum)             | 7                              |
| Color - Resin                  | Black                          |
| Durability (mating cycles max) | 25                             |
| First Mate / Last Break        | No                             |
| Flammability                   | 94V-1, 94V-2                   |
| Glow-Wire Capable              | No                             |
| Guide to Mating Part           | No                             |
| Keying to Mating Part          | None                           |
| Lock to Mating Part            | Yes                            |
| Material - Metal               | Brass                          |
| Material - Plating Mating      | Gold                           |
| Material - Plating Termination | Matte Tin                      |
| Material - Resin               | High Temperature Thermoplastic |
| Net Weight                     | 2.238/g                        |
| Number of Rows                 | 1                              |
| Orientation                    | Vertical                       |
| PCB Locator                    | No                             |
| PCB Retention                  | None                           |
| PCB Thickness - Recommended    | 1.60mm                         |
| Packaging Type                 | Bag                            |
| Pitch - Mating Interface       | 3.96mm                         |
| Plating min - Mating           | 0.381µm                        |
| Plating min - Termination      | 1.524µm                        |
| Polarized to Mating Part       | Yes                            |
| Shrouded                       | Partial                        |

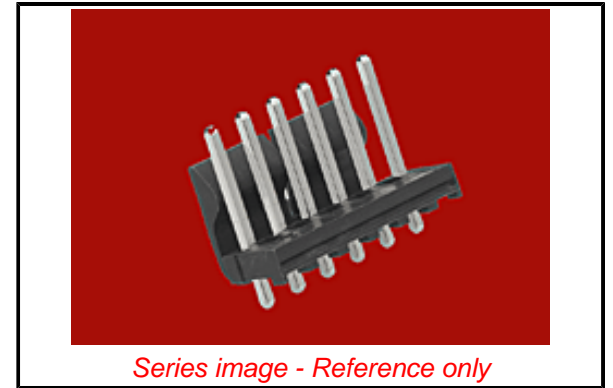

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2021)4569-DC (8  
July 2021)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[171813 Series](#)

**Mates With**

[2145](#) , [41815](#) , [6442](#) , [2139](#) , [41695](#) , [3069](#)

|                                |                               |
|--------------------------------|-------------------------------|
| Stackable                      | No                            |
| Surface Mount Compatible (SMC) | Yes                           |
| Temperature Range - Operating  | -40° to +105°C, -40° to +80°C |
| Termination Interface: Style   | Through Hole                  |

**Electrical**

|                               |            |
|-------------------------------|------------|
| Current - Maximum per Contact | 5.0A, 7.0A |
| Voltage - Maximum             | 250V       |

**Solder Process Data**

|  |          |
|--|----------|
| Duration at Max. Process Temperature (seconds) | 030      |
| Lead-free Process Capability                   | SMC&WAVE |
| Max. Cycles at Max. Process Temperature        | 003      |
| Process Temperature max. C                     | 260      |

**Material Info****Reference - Drawing Numbers**

|                         |  |
|-------------------------|--|
| Packaging Specification | PK-41791-001-001                       |
| Product Specification   | PS-171813-0001-001, PS-171813-0002-001 |
| Sales Drawing           | SD-171813-0001-000, SD-171813-0001-002 |
| Symbol/Footprint Data   | SYM-171813-0007-001                    |
| Test Summary            | TS-171813-0001-001                     |

This document was generated on 01/03/2022

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [61082-181009](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-](#)  
[010LF](#) [65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-](#)  
[5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-](#)  
[360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#)  
[801-43-006-10-002000](#)