

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [1721590206](#)
Status: **Active**
Overview: EdgeMate Wire-to-Edge-Card Power Connector
Description: 3.96mm Pitch EdgeMate Wire-to-Board Edge Connector, Female, Nylon 6/6, White, UL94-V2, without Lock, 6 Circuits
Replacement Part Number : <http://www.molex.com/molex/search/partSearch?pQuery=&sType=p&query=17215906061721590606>

Documents:

[3D Model](#) [Product Specification PS-172160-0001-001 \(PDF\)](#)
[3D Model \(PDF\)](#) [Packaging Specification PK-172159-0001-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

UL E29179

Application tooling part link


Application Tooling Part Link 11-03-0016

General

Product Family Edge Card Connectors
 Series [172159](#)
 Comments See Product Specification for maximum current rating by wire AWG and terminal material.
 Component Type Edgecard to Wire
 Data Rate Unrated
 Edge Card Thickness N/A
 High Power Bay (30.0A or more) No
 Orientation Right-Angle
 Overview [EdgeMate Wire-to-Edge-Card Power Connector](#)
 Product Name EdgeMate
 Replacement Part Number [1721590606](#)
 Replacement Part Number positive lock version
 Standard Based General
 UPC 887191569758

Physical

(p)ower-(s)ignal Configuration 6p - 0s
 Circuit Size Range 1-64 Circuits
 Circuits (Loaded) 6
 Circuits (maximum) 6
 Color - Resin White
 Durability (mating cycles max) 25
 Entry Angle 90° Angle
 Flammability 94V-2
 Keying to Mating Part Yes
 Material - Plating Mating N/A
 Material - Resin Nylon
 Net Weight 2.240/g
 PCB Locator No
 PCB Retention None
 PCB Thickness - Recommended 1.57mm
 Packaging Type Bag
 Panel Mount No
 Pitch - Mating Interface 3.96mm
 Polarized to Mating Part Polarizing Ribs
 Temperature Range - Operating -40° to +105°C, -40° to +80°C

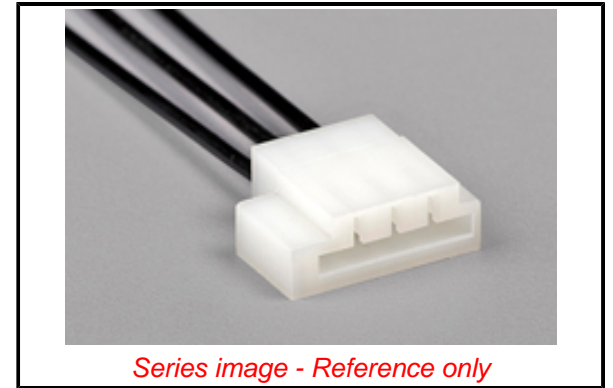

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
 D(2020)9139-DC (19
 Jan 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[172159](#) Series

Mates With

Edge Card PCB

Use With

[172160](#)

Application Tooling | [FAQ](#)

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

| Description | Product # |
|---|--------------------------|
| Extraction Tool for Flat Blade, 3.96mm KK, 2.00mm, 3.96mm EdgeMate, and Ultra-Fit Terminals | 11030016 |

Termination Interface: Style Straddle Mount-Edge Card

Electrical

Current - Maximum per Contact 7.0A
Voltage - Maximum 250V

Solder Process Data

Lead-freeProcess Capability N/A

Material Info

Reference - Drawing Numbers

Packaging Specification PK-172159-0001-001
Product Specification PS-172160-0001-001
Sales Drawing SD-172159-0000-000

This document was generated on 02/19/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-](#)
[5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-](#)
[367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)