

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [1727040064](#)  
**Status:** **Active**  
**Overview:** [FCT D-Sub Connectors](#)  
**Description:** FCT Standard-Density D-Sub Connector, Female, Straight, PCB Through Hole, Gold Plating, 500 Mating Cycles, 15 Circuits

**Documents:**

[Datasheet \(PDF\)](#)

[Brochure \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

**General**

|                  |                                      |
|------------------|--------------------------------------|
| Product Family   | D-Sub Products                       |
| Series           | <a href="#">172704</a>               |
| IP Rating        | IP20                                 |
| Overview         | <a href="#">FCT D-Sub Connectors</a> |
| Product Category | D-Sub Connector                      |
| Product Name     | FCT Products                         |
| Type             | Standard Density                     |
| UPC              | 889056019750                         |

**Physical**


|                                |                  |
|--------------------------------|------------------|
| Circuits (Loaded)              | 15               |
| Circuits (maximum)             | 15               |
| Color - Resin                  | White            |
| Durability (mating cycles max) | 500              |
| Gender                         | Female           |
| Material - Contact             | Copper Alloy     |
| Material - Resin               | PBT              |
| Material - Shell               | Steel            |
| Net Weight                     | 8.100/g          |
| Number of Rows                 | 2                |
| Orientation                    | Straight         |
| PC Tail Length                 | 10.30mm          |
| PCB Locator                    | Yes              |
| PCB Retention                  | Yes              |
| PCB Thickness - Recommended    | 1.60mm           |
| Packaging Type                 | Carton           |
| Panel Mount                    | Rear             |
| Panel Mount Method             | Flange           |
| Pitch - Mating Interface       | 2.84mm           |
| Pitch - Termination Interface  | 2.84mm           |
| Plating - Contact              | Gold over Nickel |
| Plating - Shell                | Tin              |
| Polarized to Mating Part       | Yes              |
| Polarized to PCB               | Yes              |
| Ports                          | 1                |
| Shielded                       | Yes              |
| Temperature Range - Operating  | -55° to +125°C   |
| Termination Style              | Through Hole     |
| Waterproof / Dustproof         | No               |
| Waterproof / Dustproof Type    | IP20             |

**Electrical**

|                               |      |
|-------------------------------|------|
| Current - Maximum per Contact | 7.5A |
|-------------------------------|------|

**Material Info**

|                    |         |
|--------------------|---------|
| Engineering Number | F15S1G1 |
|--------------------|---------|

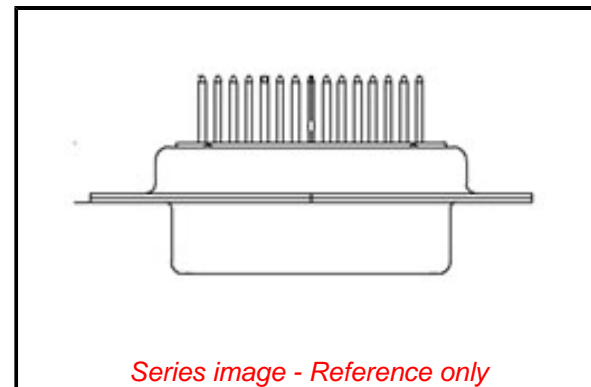

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant with Exemption 6(c)**

**REACH SVHC**

Contained Per - ED/71/2019 (16 July 2019)

Lead

**Halogen-Free**

**Status**

**Not Reviewed**

For more information, please visit [Contact US](#)

China ROHS

50 Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

**Search Parts in this Series**

[172704 Series](#)

**Mates With**

FCT Standard-Density D-Sub, Size 2, 15 Position, Plug

This document was generated on 04/10/2020

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [D-Sub Standard Connectors](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[DCM37S732N](#) [DAM15P500](#) [DEV09S364GTLF](#) [DEM09P032N](#) [DDM50P732N](#) [DAM15S332N](#) [173109-2218](#) [173109-2466](#) [173109-2469](#)  
[173109-2435](#) [56F706-005-LI](#) [56F711-015](#) [015-0341-000](#) [017041-0005](#) [012-9507-114](#) [012-9534-001](#) [609-25P](#) [M24308/2-23Z](#) [M243082310F](#)  
[M24308/2-36Z](#) [M243082411F](#) [M24308315F](#) [M24308/4-21](#) [M243084437F](#) [CT0M22-23SS](#) [CT1N36-5SC](#) [CT2-16S-17PS](#) [CT2-20-15PCAU](#)  
[CT2-24-12PS](#) [CT2-24-28PSF127A206](#) [CT6F9767-14-4-14S-5PC](#) [CT7-18-10SC](#) [CT7-18-10SCAU](#) [CT7-18-12SCAU](#) [CT7-18-1PC](#) [CT7-18-](#)  
[1PCAU](#) [CT7-18-1SC](#) [CT7-18-21SCAU](#) [CT9-16-12PS](#) [M83513/01-FC](#) [M83723/76W24619 L/C](#) [M85049/48-3-2F](#) [69001-865](#)  
[6STD09PCM99B70X](#) [6STD09SCM99B30X](#) [6STD09SCT99S40X](#) [6STD15PCT99S40X](#) [6STD15SCM99B30X](#) [6STD15SCT99S40X](#)  
[6STF09PCM05B70X](#)