

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [2035112310](#)  
**Status:** **Active**  
**Overview:** [MX64 Sealed Connectors](#)  
**Description:** 2.54mm MX64 Sealed Single Row Crimp Housing for LED Light Modules, MX64 Terminal, Black, 2 Circuits, Key C, without CPA Lock

**Documents:**

|                                |   |
|--------------------------------|---|
| <a href="#">3D Model</a>       | <a href="#">Application Specification 2035110001-AS-000 (PDF)</a> |
| <a href="#">Drawing (PDF)</a>  | <a href="#">RoHS Certificate of Compliance (PDF)</a>              |
| <a href="#">3D Model (PDF)</a> | <a href="#">Product Literature (PDF)</a>                          |

**General**

|                                |   |
|--------------------------------|---|
| Product Family                 | Crimp Housings  |
| Series                         | <a href="#">203511</a>  |
| Application                    | Power, Wire-to-Board  |
| More Detailed Tech Information | <a href="http://uscar.org/guest/teams/10/Electrical-Wiring-Component-Applications-Partnership">http://uscar.org/guest/teams/10/Electrical-Wiring-Component-Applications-Partnership</a> |
| Overview                       | <a href="#">MX64 Sealed Connectors</a>  |
| Polarization                   | C   |
| Product Name                   | MX64  |
| UPC                            | 191128232333  |


**Physical**

|                               |                |
|-------------------------------|----------------|
| Circuits (maximum)            | 2              |
| Color - Resin                 | Black          |
| Gender                        | Receptacle     |
| Glow-Wire Capable             | No             |
| Keying to Mating Part         | Yes            |
| Lock to Mating Part           | Yes            |
| Material - Resin              | PBT            |
| Net Weight                    | 4.372/g        |
| Number of Rows                | 1              |
| Packaging Type                | Bag            |
| Panel Mount                   | No             |
| Pitch - Mating Interface      | 2.54mm         |
| Polarized to Mating Part      | Yes            |
| Temperature Range - Operating | -40° to +125°C |

**Material Info**

**Reference - Drawing Numbers**

|                           |                   |
|---------------------------|-------------------|
| Application Specification | 2035110001-AS-000 |
| Sales Drawing             | 2035110001-000    |

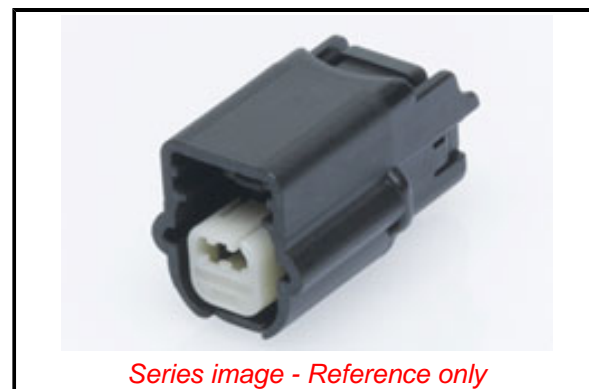

*Series image - Reference only*

**EU ELV**

**Compliant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2021)4569-DC (8  
July 2021)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Compliant

Not Contained

**Search Parts in this Series**

[203511 Series](#)

**Mates With**

LED Modules, Other USCAR Interfaces

**Use With**

Molex MX64 Terminals [33468](#)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Automotive Connectors](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[003-018-000](#) [60403001](#) [60993906-B](#) [M902-2131](#) [M902-2161](#) [72.330.1035.1](#) [73.353.4028.0](#) [F119300-B](#) [F166900](#) [F258300-B](#) [F358300-B](#)  
[F407400](#) [F444110](#) [F487000](#) [F509500B-B](#) [827153-1](#) [8N1515-32-24P](#) [9-1326729-8](#) [925474-1](#) [928905-1](#) [964562-4](#) [968782-1](#) [GT17SA-8DS-](#)  
[HU](#) [98891-1012](#) [98947-1016](#) [12004475-L](#) [12010290](#) [12010309-B](#) [12015454](#) [12020219-B](#) [12020308](#) [12041318-B](#) [12052225-L](#) [12052466](#)  
[12059125](#) [12064869](#) [12004327-B](#) [12010503-B](#) [12015308](#) [12015384](#) [12015909](#) [1-21030-1](#) [12041254](#) [12041318](#) [12047946-B](#) [12047957](#)  
[12047957-L](#) [12059473](#) [12066261](#) [12110546](#)