

ITEM	MOLEX P/N	DESCRIPTION	QTY	UOM
A,B	39014031	3CKT RECEPTACLE HOUSING 555703R2210	2	PC
C	39000077	MiniFit Term Crp Fem Chn Bs Tin 16awg	6	PC
D	--	RESIN TPE NAT SANTOPRENE	A/R	KG
E	--	MOLD PART INNER CAP	4	PC
F	--	MASTER BATCH BLACK COLOR	A/R	KG
G	--	RESIN PP RTP 151 A NAT UL94V-0 HF	A/R	KG

FROM	TO	CABLE DESCRIPTION	COLOR
A1	B1	3CX16AWG UNSHD BK UL2464	BLACK
A2	B2		RED
A3	B3		WHITE

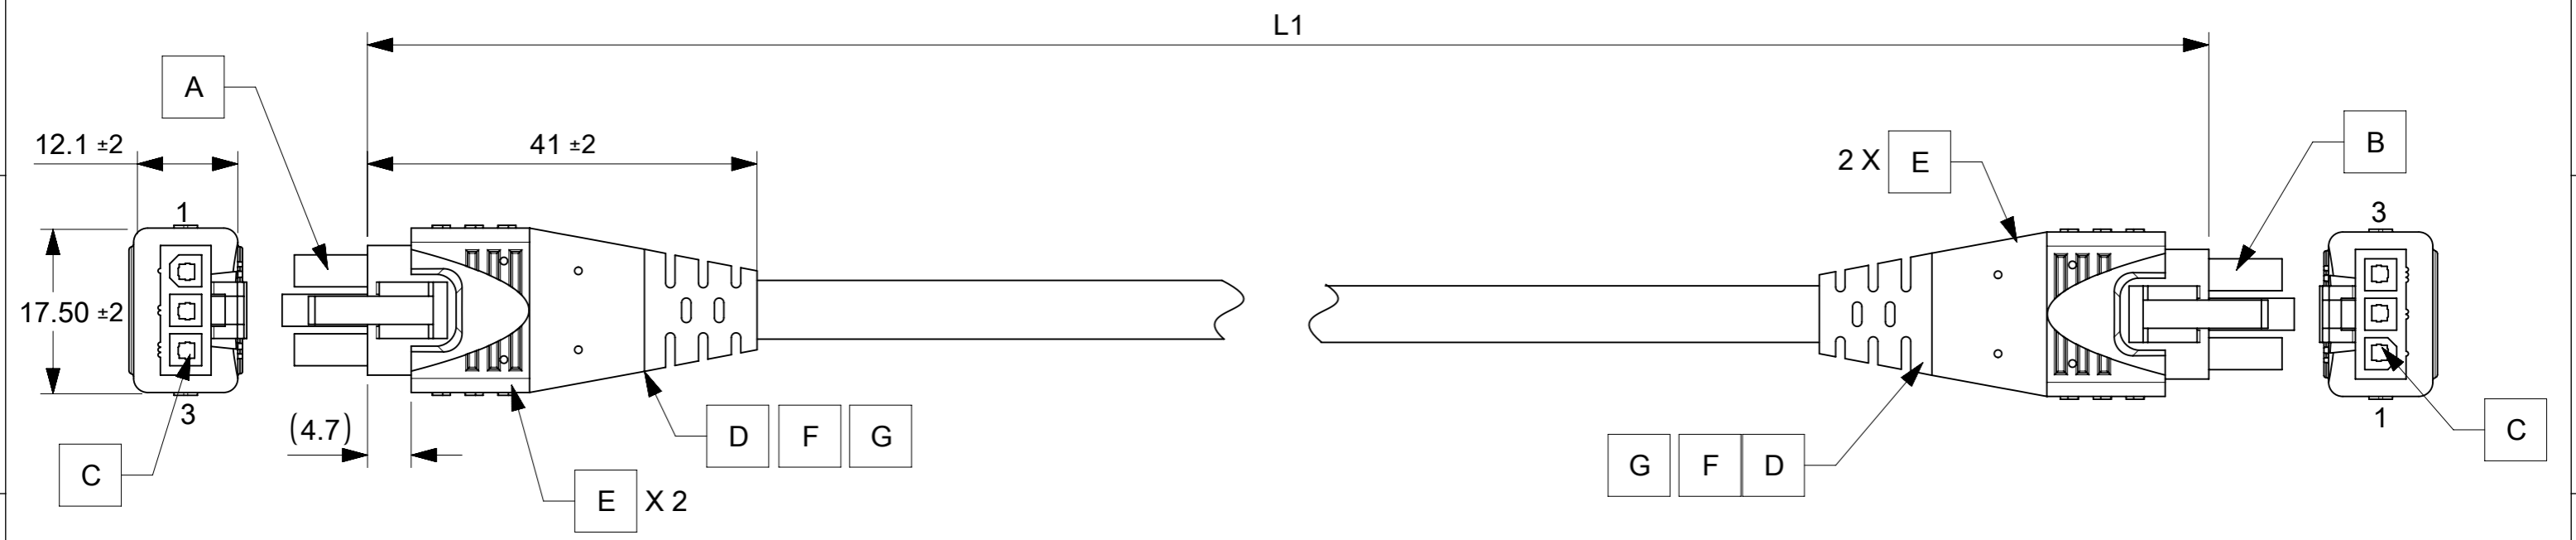


TABLE		
PART NUMBER	TITLE	L1
2153300305	3 CKT OVERMOLDED MINIFIT JR CABLE 500MM	500±10
2153300310	3 CKT OVERMOLDED MINIFIT JR CABLE 1M	1000±20
2153300320	3 CKT OVERMOLDED MINIFIT JR CABLE 2M	2000±25
2153300330	3 CKT OVERMOLDED MINIFIT JR CABLE 3M	3000±30

NOTES:

- MOLDING MATERIAL:
  - INNERCAP: PA66 NYLON RESIN.
  - OVERMOLD: SANTOPRENE TPE RESIN & MASTER BATCH BLACK
  - INNERMOLD: PP NAT UL94V-0
- ELECTRICAL PERFORMANCE:
  - VOLTAGE RATING: 300V AC.
  - THIS PRODUCT MUST PASS 100% CONTINUITY TEST PER MOLEX ES-36586-004.
    - DIELECTRONIC STRENGTH: 500V DC/0.01 SEC.
    - INSULATION RESISTANCE: 20M OHMS
- CONNECTOR VIEWS ARE SHOWN FROM MATING SIDE.
- MECHANICAL PERFORMANCE:
  - CABLE HARNESS SHOULD WITHSTAND AN AXIAL FORCE OF 5KGF FOR ONE MINUTE BETWEEN OVERMOLD AND CONNECTOR WITHOUT PHYSICAL DAMAGE.
  - OVERMOLD SIDE CAN PASS THE BENDING TEST IN 100 CYCLES AT EACH OF 2 PLANES, PER EIA364-41 CONDITION I.

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	CURRENT REV DESC:		<b>molex</b>																										
	<table border="1"> <tr> <th>FUNCTIONAL SYMBOLS</th> <th>DIMENSION UNITS</th> <th>SCALE</th> </tr> <tr> <td><math>\nabla_A = 0</math></td> <td>mm</td> <td>NTS</td> </tr> <tr> <td><math>\nabla_E = 0</math></td> <td colspan="2">GENERAL TOLERANCES (UNLESS SPECIFIED)</td> </tr> <tr> <td><math>\nabla_{E'} = 0</math></td> <td colspan="2">ANGULAR TOL ± °</td> </tr> <tr> <td></td> <td>4 PLACES</td> <td>±</td> </tr> <tr> <td></td> <td>3 PLACES</td> <td>±</td> </tr> <tr> <td></td> <td>2 PLACES</td> <td>±</td> </tr> <tr> <td></td> <td>1 PLACE</td> <td>±</td> </tr> <tr> <td></td> <td>0 PLACES</td> <td>±</td> </tr> </table>	FUNCTIONAL SYMBOLS	DIMENSION UNITS		SCALE	$\nabla_A = 0$	mm	NTS	$\nabla_E = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)		$\nabla_{E'} = 0$	ANGULAR TOL ± °			4 PLACES	±		3 PLACES	±		2 PLACES	±		1 PLACE	±		0 PLACES	±	EC NO: 670688 DRWN: SBS04 CHK'D: RDESAI01 APPR: RDESAI01 INITIAL REVISION: DRWN: SBS04 APPR: MNARAYAN01
FUNCTIONAL SYMBOLS	DIMENSION UNITS	SCALE																												
$\nabla_A = 0$	mm	NTS																												
$\nabla_E = 0$	GENERAL TOLERANCES (UNLESS SPECIFIED)																													
$\nabla_{E'} = 0$	ANGULAR TOL ± °																													
	4 PLACES	±																												
	3 PLACES	±																												
	2 PLACES	±																												
	1 PLACE	±																												
	0 PLACES	±																												
DIVISIONAL SYMBOLS	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION	DRAWING: A3-SIZE	SERIES: 215330	MATERIAL NUMBER: SEE TABLE	CUSTOMER: GENERAL MARKET	SHEET NUMBER: 1 OF 1																							

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Molex manufacturer](#):*

Other Similar products are found below :

[0000 11 01](#) [0002091117](#) [00028](#) [00029P0126](#) [0003062041](#) [00-0463](#) [0004700001](#) [00053P0231](#) [00-0820](#) [00-0822](#) [00-0824](#) [00-0920](#) [00-0921](#)  
[00-0922](#) [0009485154](#) [0009500000](#) [0009521136](#) [0009624107](#) [0009652039](#) [0010894262](#) [0011030043](#) [HT60923A](#) [0011184001](#) [0011184003](#)  
[00136](#) [00137](#) [0014563224](#) [00-1470](#) [00-1480](#) [00-1490](#) [0015247242](#) [0015453208](#) [0015477514](#) [0015477618](#) [0015917081](#) [0015917161](#) [00-](#)  
[1921](#) [00-1922](#) [00-1923](#) [00-1924](#) [00-1925](#) [0022102161](#) [0022121102](#) [0022155065](#) [0022173172](#) [0022173242](#) [0022283030](#) [00-2240](#)  
[0026482241](#) [0026604103](#) [0026607030](#)