

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [2153412124](#)  
**Status:** **Active**  
**Overview:** [Off-the-Shelf Pre-Crimped Leads](#)  
**Description:** Pre-Crimped Lead Mini-Fit Jr. Female-to-Pigtail, Tin (Sn) Plating, 300.00mm Length, 16 AWG, Red

**Documents:**

[Drawing \(PDF\)](#)

[Datasheet \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

**General**

|                        |                                                 |
|------------------------|-------------------------------------------------|
| Product Family         | Cable Assemblies                                |
| Series                 | <a href="#">215341</a>                          |
| Application            | Power, Wire-to-Board, Wire-to-Wire              |
| Assembly Configuration | Pre-crimped Lead Only                           |
| Connector to Connector | Mini-Fit Jr. Term-to-Pigtail                    |
| Overview               | <a href="#">Off-the-Shelf Pre-Crimped Leads</a> |
| Product Name           | Mini-Fit Jr.                                    |
| UPC                    | 193264559725                                    |

**Physical**

|                                |                      |
|--------------------------------|----------------------|
| Cable Length                   | 300.00mm             |
| Circuits (Loaded)              | 1                    |
| Color - Resin                  | Red                  |
| Gender                         | Female-Pigtail       |
| Material - Metal               | Brass                |
| Material - Plating Mating      | Tin                  |
| Material - Plating Termination | Tin                  |
| Net Weight                     | 6.929/g              |
| Packaging Type                 | Bag                  |
| Single Ended                   | Yes                  |
| Termination Interface: Style   | Crimp or Compression |
| Wire Insulation Diameter       | 1.80-3.10mm          |
| Wire Size AWG                  | 16                   |
| Wire/Cable Type                | UL 1015              |


**Electrical**

|                               |      |
|-------------------------------|------|
| Current - Maximum per Contact | 9.0A |
| Voltage - Maximum             | 600V |

**Material Info**

**Reference - Drawing Numbers**

|               |                |
|---------------|----------------|
| Sales Drawing | 2153411121-000 |
|---------------|----------------|

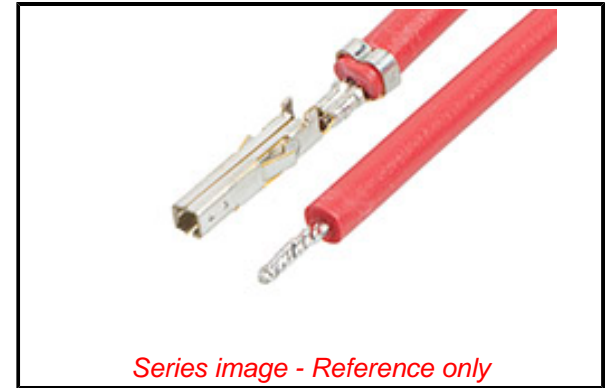

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2021)4569-DC (8  
July 2021)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[215341](#) Series

**Use With**

Mini-Fit Jr. Receptacle Housing [5557](#)  
 <br>Mini-Fit BMI Slide and Lock Panel  
 Mount [44516](#) <br>Mini-Fit BMI Panel Mount  
 Receptacle Housing<br> [42474](#) , [43760](#)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Specialised Cables](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[603PT6](#) [603SS6L](#) [604PT6](#) [604SS6](#) [706000D02F200](#) [910640](#) [1200740077](#) [1200740114](#) [AC172](#) [ACL-SSI-4](#) [R88ACAKA0015SRE](#)  
[R88ACAWL005SDE](#) [R88ACRGD0R3C](#) [1300150047](#) [1300660036](#) [1302262116](#) [1300150149](#) [1300220020](#) [1300220104](#) [1300220119](#)  
[1301240492](#) [1301810221](#) [1365323-1](#) [1613055](#) [176P12](#) [1971465-2](#) [20240400003](#) [20240400013](#) [2085828-1](#) [20886510030](#) [2-22733-8](#) [22733-](#)  
[8](#) [CB-5PSBC-RS](#) [CB-704EC-RS](#) [CB-BATACC-RS](#) [CB-JST3PSW-RS](#) [CB-M12COM-R10](#) [25AC84](#) [25AK84X](#) [25AU25](#) [25FN82](#) [3011-03](#)  
[AC118](#) [ACL-HHS-1M\(CAT5E\)](#) [SSL009PC2DC012N](#) [FC2A-KC6C](#) [2085828-2](#) [20886510150](#) [CCS-FCB-5](#) [CCSFCBF2](#)