

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0022041061](#)  
**Status:** **Active**  
**Overview:** Mini-Latch Wire-to-Board / Wire-to-Wire Connector System  
**Description:** Mini-Latch / KK Wire-to-Board Header, Vertical, with Friction Ramp, 6 Circuits, Tin (Sn) Plating, Natural

**Documents:**

<a href="#">3D Model</a>	<a href="#">Product Specification PS-5045-002-001 (PDF)</a>
<a href="#">3D Model (PDF)</a>	<a href="#">Product Specification PS-5051-005-001 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Application Specification 511910000-AS-000 (PDF)</a>
<a href="#">Product Specification 50510002-PS-000 (PDF)</a>	<a href="#">Application Specification 511910000-AS-001 (PDF)</a>
<a href="#">Product Specification 511910000-PS-000 (PDF)</a>	<a href="#">Packaging Specification SPK-5045-001-001 (PDF)</a>
<a href="#">Product Specification PS-5045-001-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>

**Agency Certification**


UL E29179

**General**

Product Family	PCB Headers
Series	<a href="#">5045</a>
Application	Signal, Wire-to-Board
Overview	<u>Mini-Latch Wire-to-Board / Wire-to-Wire Connector System</u>
Product Name	KK, Mini-Latch
UPC	800753591233

**Physical**

Breakaway	No
Circuits (Loaded)	6
Circuits (maximum)	6
Color - Resin	Natural
Durability (mating cycles max)	30
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Polyamide
Net Weight	609.000/mg
Number of Rows	1
Orientation	Vertical
PC Tail Length	3.40mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Bag
Pitch - Mating Interface	2.50mm
Pitch - Termination Interface	2.50mm
Plating min - Mating	5.080µm
Plating min - Termination	5.080µm
Polarized to PCB	No
Shrouded	Partial
Stackable	No

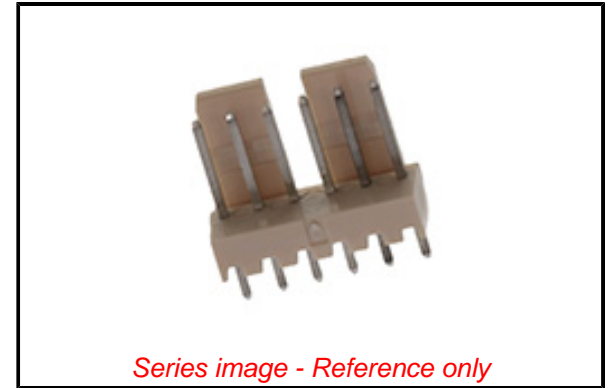

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2021)4569-DC (8  
July 2021)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[5045 Series](#)

**Mates With**

2.50mm Pitch Housings [51191](#) , [5051](#)

Surface Mount Compatible (SMC) No  
Temperature Range - Operating -40° to +105°C  
Termination Interface: Style Through Hole

**Electrical**

Current - Maximum per Contact 3.0A  
Voltage - Maximum 250V

**Material Info**

Engineering Number 5045-06A

**Reference - Drawing Numbers**

Application Specification 511910000-AS-000, 511910000-AS-001  
Packaging Specification SPK-5045-001-001  
Product Specification 50510002-PS-000, 511910000-PS-000,  
PS-5045-001-001, PS-5045-002-001, PS-5051-005-001  
Sales Drawing SD-5045-NA-001

This document was generated on 12/22/2021

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)  
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)