


CKT	DIM. A	DIM. B	SLOT LOC BETWEEN CKTS
2	7.77 .306	3.96 $\pm 0.05$ .156 $\pm 0.02$	NONE
3	11.73 .462	7.92 $\pm 0.08$ .312 $\pm 0.03$	NONE
4	15.70 .618	11.89 $\pm 0.08$ .468 $\pm 0.03$	NONE
5	19.66 .774	15.85 $\pm 0.10$ .624 $\pm 0.04$	NONE
6	23.62 .930	19.81 $\pm 0.10$ .780 $\pm 0.04$	3 & 4
7	27.58 1.086	23.77 $\pm 0.10$ .936 $\pm 0.04$	4 & 5
8	31.55 1.242	27.74 $\pm 0.13$ 1.092 $\pm 0.05$	4 & 5
9	35.51 1.398	31.70 $\pm 0.13$ 1.248 $\pm 0.05$	5 & 6
10	39.47 1.554	35.66 $\pm 0.13$ 1.404 $\pm 0.05$	5 & 6
11	43.43 1.710	39.62 $\pm 0.15$ 1.560 $\pm 0.06$	6 & 7
12	47.40 1.866	43.59 $\pm 0.15$ 1.716 $\pm 0.06$	4 & 5 8 & 9
13	51.36 2.022	47.55 $\pm 0.15$ 1.872 $\pm 0.06$	4 & 5 9 & 10
14	55.32 2.178	51.51 $\pm 0.18$ 2.028 $\pm 0.07$	5 & 6 9 & 10
15	59.28 2.334	55.47 $\pm 0.18$ 2.184 $\pm 0.07$	5 & 6 10 & 11
16	63.25 2.490	59.44 $\pm 0.18$ 2.340 $\pm 0.07$	5 & 6 11 & 12
17	67.21 2.646	63.40 $\pm 0.20$ 2.496 $\pm 0.08$	6 & 7 11 & 12
18	71.17 2.802	67.36 $\pm 0.20$ 2.652 $\pm 0.08$	6 & 7 12 & 13

CENTERLINE OF PIN AT TIP  
NOT TO VARY FROM CENTERLINE OF  
PIN AT DATUM -D- BY MORE THAN  
0.20 / .008 IN ANY DIRECTION.

- NOTES:
- MATERIAL: HEADER-GLASS FILLED POLYESTER, 94V-0, MOLDED NATURAL (WHITE).
  - FINISH: (197) OVERALL REFLOWED MATTE TIN: 0.00152/.000060 MIN. OVER 0.00127/.000050 MIN. NICKEL OVERALL.  
(154) OVERALL TIN: .00254/.000100 MIN OVER .00127/.000050 MIN NICKEL.  
(208) SELECT GOLD: .00038/.000015 MIN, SELECT TIN: .00254/.000100 MIN, OVERALL NICKEL UNDERPLATE: .00127/.000050 MIN.  
(228) SELECT GOLD: .00076/.000030 MIN, SELECT TIN: .00254/.000100 MIN, OVERALL NICKEL UNDERPLATE: .00127/.000050 MIN.  
(241) SELECT GOLD: 0.00051/.000020 MIN. SELECT TIN: 0.00254/.000100 MIN. OVERALL NICKEL UNDERPLATE: 0.00127/.000050 MIN.  
FOR ADDITIONAL PLATING INFO, SEE SD-88.
  - PRODUCT SPECIFICATION AND PROCESS PARAMETERS: SEE PS-08-50.
  - PACKAGING INFORMATION: SEE CHART
  - SOLDERABILITY: PER SMES-152.
  - PIN PUSH-OUT FORCE: PRIOR TO SOLDERING, A 3 LB. MINIMUM FORCE (IN EITHER DIRECTION)
  - PARTS ARE STACKABLE END TO END ON 3.96/.156 CENTERS.
  - THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.
  - SLOTS ON BACKWALL ARE BETWEEN CIRCUITS. SEE CHART FOR LOCATION.
  - CIRCUIT 1 DESIGNATION IS USED TO DEFINE VOID LOCATION. CIRCUIT 1 MAY OR MAY NOT LINE UP WITH CIRCUIT 1 ON THE MATING HOUSING.
  - FEATURE MAY BE ON EITHER SIDE OF THE PART

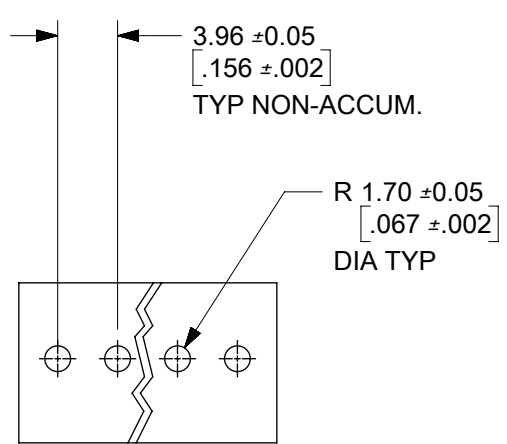



PCB LAYOUT: COMPONENT SIDE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS <b>MM/IN</b>	SCALE <b>2:1</b>	CURRENT REV DESC: OBSOLETE PART NUMBER	
GENERAL TOLERANCES (UNLESS SPECIFIED)		<p>EC NO: 650267 DRWN: SKANDB 2020/10/27 CHK'D: GGA 2020/12/10 APPR: GGA 2020/12/10</p> <p>INITIAL REVISION: DRWN: JSCHAFFER 11-07-03 APPR: MARGULIS 11-17-03</p>	
4 PLACES $\pm$	$\pm$		
3 PLACES $\pm$	$\pm 0.01$		
2 PLACES $\pm$	$\pm 0.25 \pm 0.015$		
1 PLACE $\pm$	$\pm 0.38 \pm$	<p>DOCUMENT NUMBER: <b>SDA-41792</b></p> <p>DOC TYPE: PSD DOC PART: 000 REVISION: L1</p>	
0 PLACES $\pm$	$\pm$	<p>DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</p> <p>THIRD ANGLE PROJECTION</p> <p>DRAWING: B-SIZE SERIES: 41792</p> <p>MATERIAL NUMBER: SEE TABLE CUSTOMER: GENERAL MARKET SHEET NUMBER: 1 OF 8</p>	



	10	9	8	7	6	5	4	3	2	1
	41792									
E	OPTIONS	Group	A-41792-0019/0035	Group	A-41792-0036/0050	Group	A-41792-0051/0067	Group		
		Header No:	41790-0002/0018	Header No:	41790-0004/0018	Header No:	41790-0002/0018	Header No:		
		Pin No:	43294-0573	Pin No:	43294-0572	Pin No:	43294-0643	Pin No:		
		Plating:	241 - GOLD	Plating:	197 - TIN	Plating:	197 - TIN	Plating:		
		Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	29.97 / 1.180	Pin Length L		
		Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	13.41 / .528	Mating M		
		Gold Loc G	6.86/ .270	Gold Loc G	N/A	Gold Loc G	N/A	Gold Loc G		
		Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y		
		PC Tail P	3.96/ .156	PC Tail P	3.96/ .156	PC Tail P	4.01 / .158	PC Tail P		
		Tin Loc T	5.08/ .200	Tin Loc T	OVERALL	Tin Loc T	OVERALL	Tin Loc T		
		Voided Ckts	NONE	Voided Ckts	4	Voided Ckts	NONE	Voided Ckts		
		Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per		
Ckts	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number		
2	26-61-5020	A-41792-0019								
3	26-61-5030	A-41792-0020								
4	26-61-5040	A-41792-0021	26-61-5043	A-41792-0036						
5	26-61-5050	A-41792-0022	26-61-5053	A-41792-0037						
6	26-61-5060	A-41792-0023	26-61-5063	A-41792-0038						
7	26-61-5070	A-41792-0024	26-61-5073	A-41792-0039						
8	26-61-5080	A-41792-0025	26-61-5083	A-41792-0040						
9	26-61-5090	A-41792-0026	26-61-5093	A-41792-0041						
10	26-61-5100	A-41792-0027	26-61-5103	A-41792-0042						
11	26-61-5110	A-41792-0028	26-61-5113	A-41792-0043						
12	26-61-5120	A-41792-0029	26-61-5123	A-41792-0044						
13	26-61-5130	A-41792-0030	26-61-5133	A-41792-0045						
14	26-61-5140	A-41792-0031	26-61-5143	A-41792-0046						
15	26-61-5150	A-41792-0032	26-61-5153	A-41792-0047						
16	26-61-5160	A-41792-0033	26-61-5163	A-41792-0048						
17	26-61-5170	A-41792-0034	26-61-5173	A-41792-0049						
18	26-61-5180	A-41792-0035	26-61-5183	A-41792-0050						

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER					
MM/IN		1:1		 KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS					
GENERAL TOLERANCES (UNLESS SPECIFIED)									
	MM	INCH							
4 PLACES	±		±						
3 PLACES	±		± 0.01						
2 PLACES	± 0.25		± 0.015						
1 PLACE	± 0.38		±						
0 PLACES	±		±						
ANGULAR TOL ± 0.5°				EC NO: 650267 DRWN: SKANDB CHK'D: GGA APPR: GGA		2020/10/27 2020/12/10 2020/12/10		PRODUCT CUSTOMER DRAWING	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		SERIES	
						B-SIZE		41792	
						MATERIAL NUMBER		CUSTOMER	
						SEE TABLE		GENERAL MARKET	
						DOCUMENT NUMBER		REVISION	
						SDA-41792		L1	
						PSD 000		3 OF 8	

10	9	8	7	6	5	4	3	2	1																																																																																																																								
41792																																																																																																																																	
F	E	Group A-41792-0198/0213		Group A-41792-0214/0227		Group A-41792-0242/0257		Group A-41792-0341/0352																																																																																																																									
		Header No: 41790-0002/0018		Header No: 41790-0005/0018		Header No: 41790-0003/0018		Header No: 41790-0007/0018																																																																																																																									
		Pin No: 43294-0572		Pin No: 43294-0572		Pin No: 43294-0572		Pin No: 43294-0572																																																																																																																									
		Plating: 197 - TIN		Plating: 197 - TIN		Plating: 197 - TIN		Plating: 197 - TIN																																																																																																																									
		Pin Length L 27.94/ 1.100		Pin Length L 27.94/ 1.100		Pin Length L 27.94/ 1.100		Pin Length L 27.94/ 1.100																																																																																																																									
		Mating M 11.43 / .450		Mating M 11.43 / .450		Mating M 11.43 / .450		Mating M 11.43 / .450																																																																																																																									
		Gold Loc G N/A		Gold Loc G N/A		Gold Loc G N/A		Gold Loc G N/A																																																																																																																									
		Height Y 5.41 / .213		Height Y 5.41 / .213		Height Y 5.41 / .213		Height Y 5.41 / .213																																																																																																																									
		PC Tail P 3.96 / .156		PC Tail P 3.96 / .156		PC Tail P 3.96 / .156		PC Tail P 3.96 / .156																																																																																																																									
		Tin Loc T OVERALL		Tin Loc T OVERALL		Tin Loc T OVERALL		Tin Loc T OVERALL																																																																																																																									
		Voided Ckts 2		Voided Ckts 5		Voided Ckts 3		Voided Ckts 7																																																																																																																									
		Pack Per PK-41792-002		Pack Per PK-41792-002		Pack Per PK-41792-002		Pack Per PK-41792-002																																																																																																																									
D	C	B	Material No Engineer Number		Material No Engineer Number		Material No Engineer Number		Material No Engineer Number																																																																																																																								
			Ckts																																																																																																																														
			2																																																																																																																														
			3	26-62-5031	A-41792-0198			26-62-5035	A-41792-0242																																																																																																																								
			4	26-62-5041	A-41792-0199			26-62-5045	A-41792-0243																																																																																																																								
			5	26-62-5051	A-41792-0200	41792-0214	A-41792-0214	26-62-5055	A-41792-0244																																																																																																																								
			6	26-62-5061	A-41792-0201	26-62-5060	A-41792-0215	26-62-5065	A-41792-0245																																																																																																																								
			7	26-62-5071	A-41792-0202	41792-0216	A-41792-0216	26-62-5075	A-41792-0246	41792-0341	A-41792-0341																																																																																																																						
			8	26-62-5081	A-41792-0203	41792-0217	A-41792-0217	26-62-5085	A-41792-0247	41792-0342	A-41792-0342																																																																																																																						
			9	26-62-5091	A-41792-0204	41792-0218	A-41792-0218	26-62-5095	A-41792-0248	41792-0343	A-41792-0343																																																																																																																						
			10	26-62-5101	A-41792-0205	26-62-5100	A-41792-0219	26-62-5105	A-41792-0249	26-62-5104	A-41792-0344																																																																																																																						
			11	26-62-5111	A-41792-0206	41792-0220	A-41792-0220	26-62-5115	A-41792-0250	26-62-5114	A-41792-0345																																																																																																																						
			12	26-62-5121	A-41792-0207	41792-0221	A-41792-0221	26-62-5125	A-41792-0251	41792-0346	A-41792-0346																																																																																																																						
			13			41792-0222	A-41792-0222	26-62-5135	A-41792-0252	41792-0347	A-41792-0347																																																																																																																						
			14	26-62-5141	A-41792-0209	41792-0223	A-41792-0223	26-62-5145	A-41792-0253	41792-0348	A-41792-0348																																																																																																																						
			15	26-62-5151	A-41792-0210	41792-0224	A-41792-0224	26-62-5155	A-41792-0254	41792-0349	A-41792-0349																																																																																																																						
			16	26-62-5161	A-41792-0211	41792-0225	A-41792-0225	26-62-5165	A-41792-0255	41792-0350	A-41792-0350																																																																																																																						
			17	26-62-5171	A-41792-0212	41792-0226	A-41792-0226	26-62-5175	A-41792-0256	41792-0351	A-41792-0351																																																																																																																						
18	26-62-5181	A-41792-0213	41792-0227	A-41792-0227	26-62-5185	A-41792-0257	41792-0352	A-41792-0352																																																																																																																									
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="10" style="text-align: center; font-size: 8px;">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td> </tr> <tr> <td colspan="2" style="font-size: 8px;">DIMENSION UNITS <b>MM/IN</b></td> <td colspan="2" style="font-size: 8px;">SCALE <b>1:1</b></td> <td colspan="6" style="font-size: 8px;">CURRENT REV DESC: OBSOLETE PART NUMBER</td> </tr> <tr> <td colspan="10" style="text-align: center; font-size: 12px;"><b>molex</b></td> </tr> <tr> <td colspan="10" style="text-align: center; font-size: 8px;">KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS</td> </tr> <tr> <td colspan="6" style="font-size: 8px;">GENERAL TOLERANCES (UNLESS SPECIFIED)</td> <td colspan="4" style="font-size: 8px;">EC NO: 650267 DRWN: SKANDB CHK'D: GGA APPR: GGA</td> </tr> <tr> <td colspan="2" style="font-size: 8px;">4 PLACES ±</td> <td colspan="2" style="font-size: 8px;">MM</td> <td colspan="2" style="font-size: 8px;">INCH</td> <td colspan="4" style="font-size: 8px;">2020/10/27 2020/12/10 2020/12/10</td> </tr> <tr> <td colspan="2" style="font-size: 8px;">3 PLACES ±</td> <td colspan="2" style="font-size: 8px;">0.25</td> <td colspan="2" style="font-size: 8px;">0.015</td> <td colspan="4" style="font-size: 8px;">PRODUCT CUSTOMER DRAWING</td> </tr> <tr> <td colspan="2" style="font-size: 8px;">2 PLACES ±</td> <td colspan="2" style="font-size: 8px;">0.38</td> <td colspan="2" style="font-size: 8px;">±</td> <td colspan="4" style="font-size: 8px;">INITIAL REVISION: DRWN: JSCHAFFER APPR: MARGULIS</td> </tr> <tr> <td colspan="2" style="font-size: 8px;">1 PLACE ±</td> <td colspan="2" style="font-size: 8px;">0.5</td> <td colspan="2" style="font-size: 8px;">°</td> <td colspan="4" style="font-size: 8px;">11-07-03 11-17-03</td> </tr> <tr> <td colspan="2" style="font-size: 8px;">ANGULAR TOL ±</td> <td colspan="2" style="font-size: 8px;">0.5</td> <td colspan="2" style="font-size: 8px;">°</td> <td colspan="4" style="font-size: 8px;">DOCUMENT NUMBER <b>SDA-41792</b></td> </tr> <tr> <td colspan="2" style="font-size: 8px;">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td> <td colspan="2" style="font-size: 8px;">THIRD ANGLE PROJECTION</td> <td colspan="2" style="font-size: 8px;">DRAWING <b>B-SIZE</b></td> <td colspan="2" style="font-size: 8px;">SERIES <b>41792</b></td> <td colspan="2" style="font-size: 8px;">MATERIAL NUMBER CUSTOMER <b>GENERAL MARKET</b></td> </tr> <tr> <td colspan="2" style="font-size: 8px;">SHEET NUMBER <b>4 OF 8</b></td> <td colspan="2" style="font-size: 8px;">DOC TYPE <b>PSD</b></td> <td colspan="2" style="font-size: 8px;">DOC PART <b>000</b></td> <td colspan="2" style="font-size: 8px;">REVISION <b>L1</b></td> <td colspan="2" style="font-size: 8px;"></td> </tr> </table>										THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										DIMENSION UNITS <b>MM/IN</b>		SCALE <b>1:1</b>		CURRENT REV DESC: OBSOLETE PART NUMBER						<b>molex</b>										KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS										GENERAL TOLERANCES (UNLESS SPECIFIED)						EC NO: 650267 DRWN: SKANDB CHK'D: GGA APPR: GGA				4 PLACES ±		MM		INCH		2020/10/27 2020/12/10 2020/12/10				3 PLACES ±		0.25		0.015		PRODUCT CUSTOMER DRAWING				2 PLACES ±		0.38		±		INITIAL REVISION: DRWN: JSCHAFFER APPR: MARGULIS				1 PLACE ±		0.5		°		11-07-03 11-17-03				ANGULAR TOL ±		0.5		°		DOCUMENT NUMBER <b>SDA-41792</b>				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING <b>B-SIZE</b>		SERIES <b>41792</b>		MATERIAL NUMBER CUSTOMER <b>GENERAL MARKET</b>		SHEET NUMBER <b>4 OF 8</b>		DOC TYPE <b>PSD</b>		DOC PART <b>000</b>		REVISION <b>L1</b>			
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																																																																																																																	
DIMENSION UNITS <b>MM/IN</b>		SCALE <b>1:1</b>		CURRENT REV DESC: OBSOLETE PART NUMBER																																																																																																																													
<b>molex</b>																																																																																																																																	
KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS																																																																																																																																	
GENERAL TOLERANCES (UNLESS SPECIFIED)						EC NO: 650267 DRWN: SKANDB CHK'D: GGA APPR: GGA																																																																																																																											
4 PLACES ±		MM		INCH		2020/10/27 2020/12/10 2020/12/10																																																																																																																											
3 PLACES ±		0.25		0.015		PRODUCT CUSTOMER DRAWING																																																																																																																											
2 PLACES ±		0.38		±		INITIAL REVISION: DRWN: JSCHAFFER APPR: MARGULIS																																																																																																																											
1 PLACE ±		0.5		°		11-07-03 11-17-03																																																																																																																											
ANGULAR TOL ±		0.5		°		DOCUMENT NUMBER <b>SDA-41792</b>																																																																																																																											
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING <b>B-SIZE</b>		SERIES <b>41792</b>		MATERIAL NUMBER CUSTOMER <b>GENERAL MARKET</b>																																																																																																																									
SHEET NUMBER <b>4 OF 8</b>		DOC TYPE <b>PSD</b>		DOC PART <b>000</b>		REVISION <b>L1</b>																																																																																																																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="font-size: 8px;">DOCUMENT STATUS</td> <td colspan="2" style="font-size: 8px;">P1</td> <td colspan="2" style="font-size: 8px;">RELEASE DATE</td> <td colspan="2" style="font-size: 8px;">2020/12/10</td> <td colspan="2" style="font-size: 8px;">08:28:35</td> </tr> </table>										DOCUMENT STATUS		P1		RELEASE DATE		2020/12/10		08:28:35																																																																																																															
DOCUMENT STATUS		P1		RELEASE DATE		2020/12/10		08:28:35																																																																																																																									


	10	9	8	7	6	5	4	3	2	1					
F	41792														
	E	OPTIONS	Group	A-41792-0460/0471	Group	A-41792-0472/0483	Group	A-41792-0484/0493	Group	A-41792-0579/0595					
			Header No:	41790-0007/0018	Header No:	41790-0007/0018	Header No:	41790-0009/0018	Header No:	41790-0002/0018					
			Pin No:	43294-0572	Pin No:	43294-0572	Pin No:	43294-0572	Pin No:	43294-0571					
			Plating:	197 - TIN	Plating:	197 - TIN	Plating:	197 - TIN	Plating:	154 - TIN					
			Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100					
			Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450					
			Gold Loc G	N/A	Gold Loc G	N/A	Gold Loc G	N/A	Gold Loc G	N/A					
			Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213					
			PC Tail P	3.96 / .156	PC Tail P	3.96 / .156	PC Tail P	3.96 / .156	PC Tail P	3.96 / .156					
			Tin Loc T	OVERALL	Tin Loc T	OVERALL	Tin Loc T	OVERALL	Tin Loc T	OVERALL					
			Voided Ckts	2, 7	Voided Ckts	4, 7	Voided Ckts	2, 5, 9	Voided Ckts	NONE					
			Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002					
	D	Ckts	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number					
		2							50-29-1904	A-41792-0579					
		3							50-29-1905	A-41792-0580					
		4							50-29-1906	A-41792-0581					
		5							50-29-1907	A-41792-0582					
6								50-29-1908	A-41792-0583						
7		41792-0460	A-41792-0460		A-41792-0472			50-29-1909	A-41792-0584						
8		41792-0461	A-41792-0461	26-60-5087	A-41792-0473			50-29-1910	A-41792-0585						
9					A-41792-0474		A-41792-0484	50-29-1911	A-41792-0586						
10		41792-0463	A-41792-0463		A-41792-0475		A-41792-0485	50-29-1912	A-41792-0587						
11		41792-0464	A-41792-0464		A-41792-0476		A-41792-0486	50-29-1913	A-41792-0588						
12		41792-0465	A-41792-0465		A-41792-0477	26-60-5128	A-41792-0487	50-29-1914	A-41792-0589						
13		41792-0466	A-41792-0466		A-41792-0478		A-41792-0488	50-29-1915	A-41792-0590						
14		41792-0467	A-41792-0467		A-41792-0479		A-41792-0489	50-29-1916	A-41792-0591						
15		41792-0468	A-41792-0468		A-41792-0480		A-41792-0490	50-29-1917	A-41792-0592						
16		41792-0469	A-41792-0469		A-41792-0481		A-41792-0491	50-29-1918	A-41792-0593						
17		41792-0470	A-41792-0470		A-41792-0482		A-41792-0492	50-29-1919	A-41792-0594						
18		41792-0471	A-41792-0471		A-41792-0483		A-41792-0493	50-29-1920	A-41792-0595						
C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
	DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER										
	MM/IN		1:1												
	GENERAL TOLERANCES (UNLESS SPECIFIED)				EC NO: 650267 DRWN: SKANDB 2020/10/27 CHK'D: GGA 2020/12/10 APPR: GGA 2020/12/10 INITIAL REVISION: DRWN: JSCHAFFER 11-07-03 APPR: MARGULIS 11-17-03						DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
		MM	INCH								SDA-41792		PSD	000	L1
	4 PLACES	±		±											
	3 PLACES	±		± 0.01											
	2 PLACES	±	0.25	± 0.015											
	1 PLACE	±	0.38	±											
	0 PLACES	±		±											
ANGULAR TOL ± 0.5°				THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						B-SIZE	41792	SEE TABLE	GENERAL MARKET	5 OF 8					
DOCUMENT STATUS		P1	RELEASE DATE	2020/12/10	08:28:35										
	9	8	7	6	5	4	3	2	1						
<small>           FORMAT: Eng-16ga-master-ib-prod-B            REVISION: E            DATE: 2020/11/4         </small>															

	10	9	8	7	6	5	4	3	2	1					
	41792														
F	E	D	C	B	A	OPTIONS	Group	A-41792-0596/0612	Group	A-41792-0613/0629	Group	A-41792-0484/0493	Group	A-41792-0653	
							Header No:	41790-0007/0018	Header No:	41790-0009/0018	Header No:	41790-0009/0018	Header No:	41790-0005/0018	
							Pin No:	43294-0571	Pin No:	43294-0571	Pin No:	43294-0571	Pin No:	43294-0570	
							Plating:	154 - TIN	Plating:	154 - TIN	Plating:	154 - TIN	Plating:	228 - 30 GOLD	
							Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	
							Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450	
							Gold Loc G	N/A	Gold Loc G	N/A	Gold Loc G	N/A	Gold Loc G	6.86/ .270	
							Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213	
							PC Tail P	3.96 / .156	PC Tail P	3.96 / .156	PC Tail P	3.96 / .156	PC Tail P	3.96/ .156	
							Tin Loc T	OVERALL	Tin Loc T	OVERALL	Tin Loc T	OVERALL	Tin Loc T	5.08/ .200	
							Voided Ckts	2, 7	Voided Ckts	2, 5, 9	Voided Ckts	2, 5, 9	Voided Ckts	2, 5	
							Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002	
							Ckts	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number
							2								
							3								
							4								
							5								
							6							41792-0653	A-41792-0653
7	50-29-1926	A-41792-0601													
8	50-29-1927	A-41792-0602													
9	50-29-1928	A-41792-0603	50-29-1945	A-41792-0620		A-41792-0630									
10	50-29-1929	A-41792-0604	50-29-1946	A-41792-0621		A-41792-0631									
11	50-29-1930	A-41792-0605	50-29-1947	A-41792-0622		A-41792-0632									
12	50-29-1931	A-41792-0606	50-29-1948	A-41792-0623	41792-0633	A-41792-0633									
13	50-29-1932	A-41792-0607	50-29-1949	A-41792-0624		A-41792-0634									
14	50-29-1933	A-41792-0608	50-29-1950	A-41792-0625		A-41792-0635									
15	50-29-1934	A-41792-0609	50-29-1951	A-41792-0626		A-41792-0636									
16	50-29-1935	A-41792-0610	50-29-1952	A-41792-0627		A-41792-0637									
17	50-29-1936	A-41792-0611	50-29-1953	A-41792-0628		A-41792-0638									
18	50-29-1937	A-41792-0612	50-29-1954	A-41792-0629		A-41792-0639									
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															
DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER											
MM/IN		1:1		 KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS PRODUCT CUSTOMER DRAWING											
GENERAL TOLERANCES (UNLESS SPECIFIED)															
	MM	INCH													
4 PLACES	±	±													
3 PLACES	±	±	0.01												
2 PLACES	±	0.25	± 0.015												
1 PLACE	±	0.38	±												
0 PLACES	±	±													
ANGULAR TOL ± 0.5°				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES					
						B-SIZE		41792		MATERIAL NUMBER					
										CUSTOMER					
										SEE TABLE					
										GENERAL MARKET					
										SHEET NUMBER					
										6 OF 8					
DOCUMENT STATUS		P1	RELEASE DATE	2020/12/10	08:28:35										
	9	8	7	6	5	4	3	2	1						
<small>           FORMAT: Eng-16ga-master-ib-prod-B            REVISION: E            DATE: 2020/11/4         </small>															



41792

OPTIONS	Group	A-41792-0704	Group		Group		Group	
	Header No:	41790-0005/0018	Header No:		Header No:		Header No:	
	Pin No:	43294-0572	Pin No:		Pin No:		Pin No:	
	Plating:	197 - TIN	Plating:		Plating:		Plating:	
	Pin Length L	27.94 / 1.100	Pin Length L		Pin Length L		Pin Length L	
	Mating M	11.43 / .450	Mating M		Mating M		Mating M	
	Gold Loc G	N/A	Gold Loc G		Gold Loc G		Gold Loc G	
	Height Y	5.41 / .213	Height Y		Height Y		Height Y	
	PC Tail P	3.96/ .156	PC Tail P		PC Tail P		PC Tail P	
	Tin Loc T	OVERALL	Tin Loc T		Tin Loc T		Tin Loc T	
	Voided Ckts	2, 3, 5	Voided Ckts		Voided Ckts		Voided Ckts	
	Pack Per	PK-41792-002	Pack Per		Pack Per		Pack Per	
	Ckts	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number	Material No
2								
3								
4								
5								
6	41792-0704	A-41792-0704						
7								
8								
9								
10								
11								
12								
13								
14								
15								
16								
17								
18								

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER					
MM/IN		1:1		 <p>KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS</p> <p>PRODUCT CUSTOMER DRAWING</p> <p>EC NO: 650267 DRWN: SKANDB 2020/10/27 CHK'D: GGA 2020/12/10 APPR: GGA 2020/12/10</p> <p>INITIAL REVISION: DRWN: JSCHAFFER 11-07-03 APPR: MARGULIS 11-17-03</p>					
GENERAL TOLERANCES (UNLESS SPECIFIED)									
	MM	INCH							
4 PLACES	±		±						
3 PLACES	±		± 0.01						
2 PLACES	± 0.25		± 0.015						
1 PLACE	± 0.38		±						
0 PLACES	±		±						
ANGULAR TOL ± 0.5°				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING	
				B-SIZE		SERIES 41792		MATERIAL NUMBER	
								CUSTOMER	
								SEE TABLE	
								GENERAL MARKET	
								SHEET NUMBER	
								8 OF 8	



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)  
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)