

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0313872014](#)  
**Status:** **Active**  
**Overview:** [MX123 Sealed Connection System](#)  
**Description:** 2.54mm Pitch, MX123 Header, 73 Circuits Shrouded Assembly, (72) 0.64mm Square Signal Pins + (1) 2.8mm Power Blade, Harness Side Key Code A, Black (Au Mate Side Finish)

**Documents:**

<a href="#">3D Model</a>	<a href="#">Application Specification AS-31386-200-001 (PDF)</a>
<a href="#">3D Model (PDF)</a>	<a href="#">Packaging Specification PK-31301-916-001 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Test Summary TS-34566-002-001 (PDF)</a>
<a href="#">Product Specification PS-31387-200-001 (PDF)</a>	<a href="#">Datasheet (PDF)</a>
<a href="#">Product Specification PS-34566-0000-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>

**General**


Product Family	PCB Headers
Series	<a href="#">31387</a>
Application	Automotive, Power, Wire-to-Board
Overview	<a href="#">MX123 Sealed Connection System</a>
Product Name	MX123
UPC	822348860661

**Physical**

Breakaway	No
Circuits (Loaded)	73
Circuits (maximum)	73
Color - Resin	Black
First Mate / Last Break	No
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Nylon Alloy
Net Weight	22.610/g
Number of Rows	4
Orientation	Vertical
PC Tail Length	6.50mm
PCB Locator	No
PCB Retention	None
Packaging Type	Carton
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Polarized to Mating Part	Yes
Polarized to PCB	No
Shrouded	Yes
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +125°C
Termination Interface: Style	Through Hole

**Electrical**

Current - Maximum per Contact	11.0A
Voltage - Maximum	500V

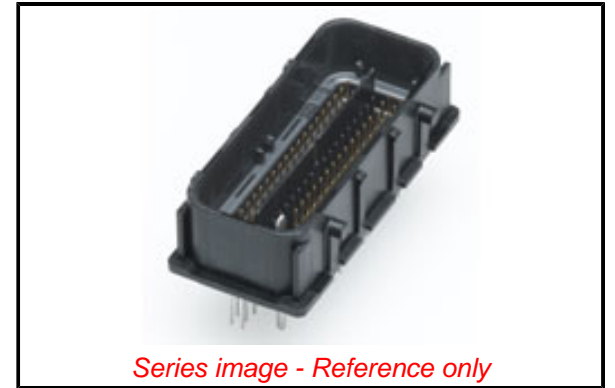

*Series image - Reference only*

**EU ELV**

**Compliant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2020)9139-DC (19  
Jan 2021)

**Halogen-Free**

**Status**

**Not Relevant**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Not Relevant

Compliant

Not Contained

**Search Parts in this Series**

[31387 Series](#)

**Mates With**

[MX123 Female Harness Connector Assembly 34566](#)

**Use With**

[33467 MX64 Female Terminals Au](#)

**Solder Process Data**

Lead-free Process Capability

N/A

**Material Info****Reference - Drawing Numbers**

Application Specification

AS-31386-200-001

Packaging Specification

PK-31301-916-001

Product Specification

PS-31387-200-001, PS-34566-0000-001

Sales Drawing

SD-31387-073-000, SD-31387-173-000

Test Summary

TS-34566-002-001

This document was generated on 12/14/2021

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Automotive Connectors](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[003-018-000](#) [60403001](#) [60993906-B](#) [M902-2131](#) [M902-2161](#) [72.330.1035.1](#) [73.353.4028.0](#) [F119300-B](#) [F166900](#) [F258300-B](#) [F358300-B](#)  
[F407400](#) [F444110](#) [F487000](#) [F509500B-B](#) [827153-1](#) [8N1515-32-24P](#) [9-1326729-8](#) [925474-1](#) [928905-1](#) [964562-4](#) [968782-1](#) [GT17SA-8DS-](#)  
[HU](#) [98891-1012](#) [98947-1016](#) [12004475-L](#) [12010290](#) [12010309-B](#) [12015454](#) [12020219-B](#) [12020308](#) [12041318-B](#) [12052225-L](#) [12052466](#)  
[12059125](#) [12064869](#) [12004327-B](#) [12010503-B](#) [12015308](#) [12015384](#) [12015909](#) [1-21030-1](#) [12041254](#) [12041318](#) [12047946-B](#) [12047957](#)  
[12047957-L](#) [12059473](#) [12066261](#) [12110546](#)