

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0346900200](#)
Status: **Active**
Overview: [Stac64 Single, Multi-Pocket and Hybrid Header System](#)
Description: [Stac64 Vertical Header Assembly, 20 Circuits, Polarization A, Black, Tray](#)

Documents:

3D Model	Application Specification AS-34729-020-001 (PDF)
3D Model (PDF)	Packaging Specification PK-31300-892-001 (PDF)
Drawing (PDF)	Brochure (PDF)
Product Specification PS-34729-020-001 (PDF)	RoHS Certificate of Compliance (PDF)
Application Specification 347290200-AS-CH-000 (PDF)	

General


Product Family	PCB Headers
Series	34690
Application	Automotive, Power, Wire-to-Board
Comments	Polarization A
Overview	Stac64 Single, Multi-Pocket and Hybrid Header System
Product Name	Stac64
UPC	800756894218

Physical

Breakaway	No
Circuits (Loaded)	20
Circuits (maximum)	20
Color - Resin	Black
Durability (mating cycles max)	10
First Mate / Last Break	No
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	7.555/g
Number of Rows	2
Orientation	Vertical
PC Tail Length	3.33mm
PCB Locator	Yes
PCB Retention	None
PCB Thickness - Recommended	1.57mm
Packaging Type	Tray
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Yes
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +100°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	10.0A
-------------------------------	-------

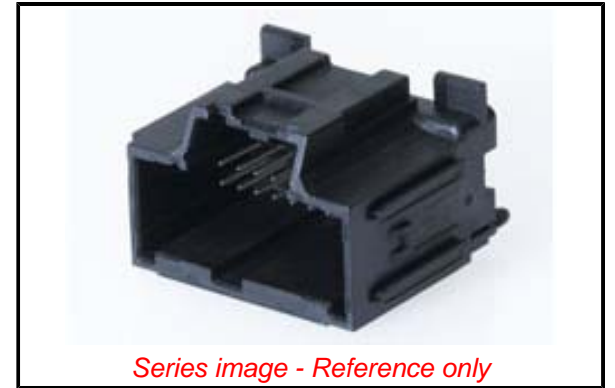

Series image - Reference only

EU ELV

Compliant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2021)4569-DC (8
July 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Compliant

Not Contained

Search Parts in this Series

[34690 Series](#)

Mates With

[34729](#) 2.54mm (.100") Pitch Stac64 Right Angle Receptacle, [31408](#) USCAR 2.54mm (.100") Pitch Receptacle

Voltage - Maximum 500V

Solder Process Data

Duration at Max. Process Temperature (seconds) 040
Lead-free Process Capability WAVE
Max. Cycles at Max. Process Temperature 003
Process Temperature max. C 260

Material Info

Reference - Drawing Numbers

Application Specification 347290200-AS-CH-000, AS-34729-020-001
Packaging Specification PK-31300-892-001
Product Specification PS-34729-020-001
Sales Drawing 346900000-000, SD-34707-200-001,
SD-34707-300-001, SD-34707-400-001

This document was generated on 09/20/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Automotive Connectors](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[003-018-000](#) [60403001](#) [60993906-B](#) [M902-2131](#) [M902-2161](#) [72.330.1035.1](#) [73.353.4028.0](#) [F119300-B](#) [F166900](#) [F258300-B](#) [F358300-B](#)
[F407400](#) [F444110](#) [F487000](#) [F509500B-B](#) [827153-1](#) [8N1515-32-24P](#) [9-1326729-8](#) [925474-1](#) [928905-1](#) [964562-4](#) [968782-1](#) [GT17SA-8DS-](#)
[HU](#) [98891-1012](#) [98947-1016](#) [12004475-L](#) [12010290](#) [12010309-B](#) [12015454](#) [12020219-B](#) [12020308](#) [12041318-B](#) [12052225-L](#) [12052466](#)
[12059125](#) [12064869](#) [12004327-B](#) [12010503-B](#) [12015308](#) [12015384](#) [12015909](#) [1-21030-1](#) [12041254](#) [12041318](#) [12047946-B](#) [12047957](#)
[12047957-L](#) [12059473](#) [12066261](#) [12110546](#)