

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** **0348250200**  
**Status:** **Active**  
**Overview:** Mini50 Connection Systems  
**Description:** Mini50 Unsealed Vertical Header, Dual Row, 20 Circuit, Polarization Option A, Black, Tray

**Documents:**

<a href="#">3D Model</a>	<a href="#">Application Specification AS-34791-020-FR-001 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Packaging Specification PK-31301-440-001 (PDF)</a>
<a href="#">3D Model (PDF)</a>	<a href="#">Test Summary 347910020-TS-000 (PDF)</a>
<a href="#">Product Specification PS-34791-020-001 (PDF)</a>	<a href="#">Datasheet (PDF)</a>
<a href="#">Application Specification AS-34791-020-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>
<a href="#">Application Specification AS-34791-020-CH-001 (PDF)</a>	

**General**


Product Family	PCB Headers
Series	34825
Application	Automotive, Power, Signal, Wire-to-Board
Overview	Mini50 Connection Systems
Product Name	Mini50
UPC	887191402550

**Physical**

Breakaway	No
Circuits (Loaded)	20
Circuits (maximum)	20
Color - Resin	Black
Durability (mating cycles max)	10
First Mate / Last Break	No
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	3.156/g
Number of Rows	2
Orientation	Vertical
PC Tail Length	2.87mm
PCB Locator	Yes
Packaging Type	Tray
Pitch - Mating Interface	2.00mm
Plating min - Mating	2.500µm
Plating min - Termination	2.500µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole

**Electrical**

Current - Maximum per Contact	4.0A (for reference only)
Voltage - Maximum	14V (typical operating)

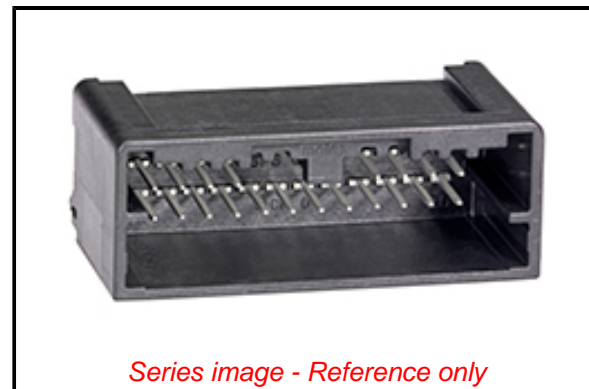

Series image - Reference only

**EU ELV  
Compliant**

**EU RoHS  
Compliant**  
**REACH SVHC**

Not Contained Per -  
D(2021)4569-DC (8  
July 2021)

**Halogen-Free  
Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS	Green Image
ELV	Compliant
RoHS Phthalates	Not Contained

**Search Parts in this Series**

[34825 Series](#)

**Mates With**

[34824 Mini50 Unsealed Dual Row Receptacle](#)

**Solder Process Data**

Duration at Max. Process Temperature (seconds)	040
Lead-free Process Capability	WAVE
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	260

**Material Info****Reference - Drawing Numbers**

Application Specification	AS-34791-020-001, AS-34791-020-CH-001, AS-34791-020-FR-001
Packaging Specification	PK-31301-440-001
Product Specification	PS-34791-020-001
Sales Drawing	SD-34825-001-001
Test Summary	347910020-TS-000

This document was generated on 01/03/2022

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Automotive Connectors](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[003-018-000](#) [60403001](#) [60993906-B](#) [M902-2131](#) [M902-2161](#) [72.330.1035.1](#) [73.353.4028.0](#) [F119300-B](#) [F166900](#) [F258300-B](#) [F358300-B](#)  
[F407400](#) [F444110](#) [F487000](#) [F509500B-B](#) [827153-1](#) [8N1515-32-24P](#) [9-1326729-8](#) [925474-1](#) [928905-1](#) [964562-4](#) [968782-1](#) [GT17SA-8DS-](#)  
[HU](#) [98891-1012](#) [98947-1016](#) [12004147](#) [12004475-L](#) [12010290](#) [12010309-B](#) [12015454](#) [12020219-B](#) [12020308](#) [12041318-B](#) [12052225-L](#)  
[12052466](#) [12059125](#) [12064869](#) [12004327-B](#) [12010503-B](#) [12015308](#) [12015384](#) [12015909](#) [1-21030-1](#) [12041254](#) [12041318](#) [12047946-B](#)  
[12047957](#) [12047957-L](#) [12059473](#) [12066261](#)