

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0366380003](#)
Status: **Active**
Overview: CMC and CMX Sealed, Hybrid, Modular Connectors
Description: 2.50mm, 3.50mm CMC Header, Right-Angle, 48 Position, 1 Port, Brown, Peg, Lead-Free

Documents:


3D Model	Packaging Specification PK-36638-001-001 (PDF)
Drawing (PDF)	Packaging Specification PK-36638-003-001 (PDF)
3D Model (PDF)	Datasheet (PDF)
Product Specification PS-36638-001-001 (PDF)	RoHS Certificate of Compliance (PDF)
Application Specification AS-36638-001-001 (PDF)	

General

Product Family	PCB Headers
Series	36638
Application	Automotive, Power, Wire-to-Board
Comments	Carton Box Packing
Overview	CMC and CMX Sealed, Hybrid, Modular Connectors
Product Name	CMC
UPC	822350795692

Physical

(p)ower-(s)ignal Configuration	8p - 40s
Breakaway	No
Circuits (Loaded)	48
Circuits (maximum)	48
Circuits Detail	8 x 1.5mm & 40 x 0.635mm terminals
Color - Resin	Black
Durability (mating cycles max)	20
First Mate / Last Break	Yes
Glow-Wire Capable	No
Guide to Mating Part	Yes
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Mated Height	6.70mm
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Polyester
Net Weight	46.799/g
Number of Rows	4
Orientation	Right Angle
PC Tail Length	2.90mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Carton
Pitch - Mating Interface	2.50mm, 3.50mm, 3.70mm
Plating min - Mating	4.064µm
Plating min - Termination	4.064µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Closed Ends
Stackable	No
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40° to +100°C

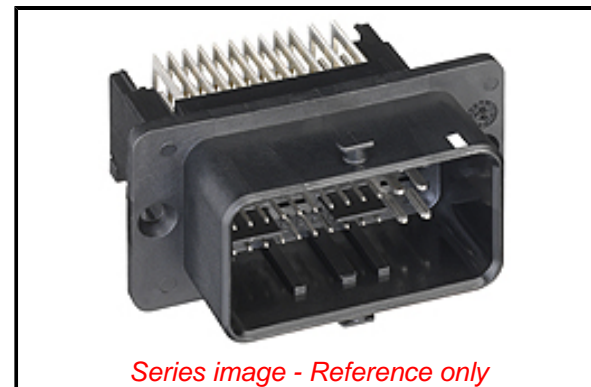

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2021)4569-DC (8
July 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[36638 Series](#)

Mates With

CMC Receptacle [643201319](#) , [643203319](#)

Termination Interface: Style Solder or Weld

Electrical

Current - Maximum per Contact 6.0A
Voltage - Maximum 14V DC

Solder Process Data

Lead-freeProcess Capability N/A

Material Info

Reference - Drawing Numbers

Application Specification AS-36638-001-001
Packaging Specification PK-36638-001-001, PK-36638-003-001
Product Specification PS-36638-001-001
Sales Drawing 366381000-000

This document was generated on 02/08/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Automotive Connectors](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[003-018-000](#) [60403001](#) [60993906-B](#) [M902-2131](#) [M902-2161](#) [72.330.1035.1](#) [73.353.4028.0](#) [F119300-B](#) [F166900](#) [F258300-B](#) [F358300-B](#)
[F407400](#) [F444110](#) [F487000](#) [F509500B-B](#) [827153-1](#) [8N1515-32-24P](#) [9-1326729-8](#) [925474-1](#) [928905-1](#) [964562-4](#) [968782-1](#) [GT17SA-8DS-](#)
[HU](#) [98891-1012](#) [98947-1016](#) [12004147](#) [12004475-L](#) [12010290](#) [12010309-B](#) [12015454](#) [12020219-B](#) [12020308](#) [12041318-B](#) [12052225-L](#)
[12052466](#) [12059125](#) [12064869](#) [12004327-B](#) [12010503-B](#) [12015308](#) [12015384](#) [12015909](#) [1-21030-1](#) [12041254](#) [12041318](#) [12047946-B](#)
[12047957](#) [12047957-L](#) [12059473](#) [12066261](#)