

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0367570142](#)  
**Status:** **Active**  
**Overview:** [MLX Power Connectors](#)  
**Description:** 6.35mm Pitch MLX Power Connector Header with Socket Terminal, Vertical, 3 Circuits, Nylon 6/6 94V-2, Tin (Sn) Plating, Natural, Lead-Free, Glow-Wire Capable with CTI of 325V

**Documents:**

|  |  |
|--|--|
| <a href="#">3D Model (PDF)</a>                                 | <a href="#">Packaging Specification PK-43255-001-001 (PDF)</a> |
| <a href="#">3D Model</a>                                       | <a href="#">Packaging Specification PK-43255-003-001 (PDF)</a> |
| <a href="#">Drawing (PDF)</a>                                  | <a href="#">Datasheet (PDF)</a>                                |
| <a href="#">Product Specification PSX-42002-0001-001 (PDF)</a> | <a href="#">RoHS Certificate of Compliance (PDF)</a>           |

**Agency Certification**

|     |         |
|-----|---------|
| CSA | LR19980 |
| UL  | E29179  |


**General**

|                |  |
|----------------|--|
| Product Family | PCB Headers  |
| Series         | <a href="#">36757</a>  |
| Application    | Power, Wire-to-Board   |
| Comments       | Glow Wire compatible with CTI of 325V; This Molex product is manufactured from material that has the following ratings, tested by independent agencies: a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12 and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options. |

|                |                                      |
|----------------|--------------------------------------|
| Component Type | PCB Header                           |
| Overview       | <a href="#">MLX Power Connectors</a> |
| Product Name   | MLX                                  |
| Taxonomy       | PCB Headers and Receptacles          |
| UPC            | 884982520196                         |

**Physical**

|                                |         |
|--------------------------------|---------|
| Breakaway                      | No      |
| Circuits (Loaded)              | 3       |
| Circuits (maximum)             | 3       |
| Color - Resin                  | Natural |
| Durability (mating cycles max) | 50      |
| First Mate / Last Break        | No      |
| Flammability                   | 94V-2   |
| Glow-Wire Capable              | Yes     |
| Guide to Mating Part           | Yes     |
| Keying to Mating Part          | Yes     |
| Lock to Mating Part            | Yes     |

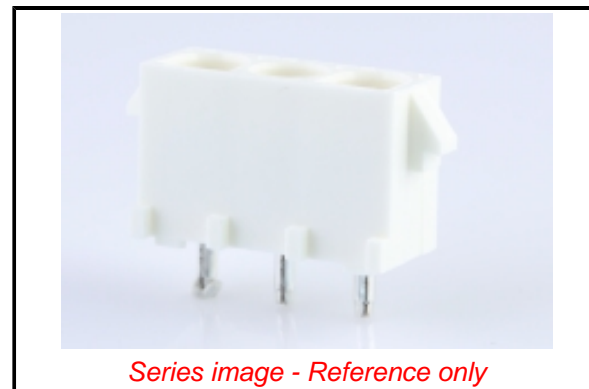

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2022)4187-DC (10  
June 2022)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[36757 Series](#)

**Mates With**

[42021 Plug](#)

|                                |                |
|--------------------------------|----------------|
| Material - Plating Mating      | Tin            |
| Material - Resin               | Nylon          |
| Net Weight                     | 2.151/g        |
| Number of Rows                 | 1              |
| Orientation                    | Vertical       |
| PC Tail Length                 | 4.27mm         |
| PCB Retention                  | Yes            |
| PCB Thickness - Recommended    | 1.60mm         |
| Packaging Type                 | Bag            |
| Pitch - Mating Interface       | 6.35mm         |
| Polarized to PCB               | Yes            |
| Shrouded                       | Fully          |
| Surface Mount Compatible (SMC) | No             |
| Temperature Range - Operating  | -55° to +105°C |
| Termination Interface: Style   | Through Hole   |

**Electrical**

|                               |              |
|-------------------------------|--------------|
| Current - Maximum per Contact | 13.5A, 20.0A |
| Voltage - Maximum             | 600V         |

**Material Info****Reference - Drawing Numbers**

|                         |                                    |
|-------------------------|------------------------------------|
| Packaging Specification | PK-43255-001-001, PK-43255-003-001 |
| Product Specification   | PSX-42002-0001-001                 |
| Sales Drawing           | SD-36757-0002-001                  |

This document was generated on 01/06/2023

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pin & Socket Connectors](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[770392-1](#) [794042-1](#) [796885-1](#) [R929991004](#) [R929993003](#) [1403611-1](#) [1-480349-5](#) [152302-5](#) [153211-2](#) [1586091-1](#) [1586092-1](#) [1586129-1](#)  
[1586368-1](#) [1586616-1](#) [1586680-5](#) [164164-5](#) [1-6609930-1](#) [172296-1](#) [19-09-2035](#) [200503-1](#) [200679-1](#) [2029090-4](#) [2029095-4](#) [293737-2](#) [1-](#)  
[765362-4](#) [SPB-18-32PSW](#) [200833-4](#) [2029096-4](#) [R929993000](#) [319-10-101-00-005000](#) [319-10-102-00-001000](#) [319-10-104-00-001000](#)  
[319-10-105-00-001000](#) [319-10-108-00-001000](#) [319-10-112-00-006000](#) [39-01-8019](#) [319-10-101-00-001000](#) [319-10-102-00-005000](#)  
[09-18-5930](#) [2008149-4](#) [HVC142AKRF-E](#) [566-002-714-120](#) [1-640721-9](#) [1586611-1](#) [MTA106F-PC](#) [660-032NF23S8-03](#) [881460-1](#) [1586842-4](#)  
[SPB-18-32PS](#) [IL-8S-S3L-\(N\)](#)