

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0430450807](#)  
**Status:** **Active**  
**Overview:** Micro-Fit Connector System  
**Description:** Micro-Fit 3.0 Right-Angle Header, 3.00mm Pitch, Dual Row, 8 Circuits, with PCB Press-fit Metal Retention Clip, Gold, Glow-Wire Capable, Black, Tape and Reel

**Documents:**

<a href="#">3D Model (PDF)</a>	<a href="#">Test Summary 430450006-TS-000 (PDF)</a>
<a href="#">3D Model</a>	<a href="#">Test Summary TS-43045-001-001 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Test Summary TS-43045-002-001 (PDF)</a>
<a href="#">Product Specification 430450001-PS-KO-000 (PDF)</a>	<a href="#">Test Summary TS-46235-001-001 (PDF)</a>
<a href="#">Product Specification 430450001-PS-SP-000 (PDF)</a>	<a href="#">Datasheet (PDF)</a>
<a href="#">Product Specification PS-43045-001 (PDF)</a>	<a href="#">Symbol Footprint Data SYM-43045-0806-001 (PDF)</a>
<a href="#">Application Specification AS-43045-001-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>
<a href="#">Packaging Specification 430450001-PK-000 (PDF)</a>	

**Agency Certification**

CSA	LR19980
UL	E29179


**General**

Product Family	PCB Headers
Series	43045
Application	Power, Wire-to-Board
Comments	<p>High Temperature Square Pin Solder</p> <p>Type&lt;P&gt;&lt;P&gt;This Molex product is manufactured from material that has the following ratings, tested by independent agencies:. a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. &lt;P&gt;&lt;P&gt; The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). &lt;P&gt; If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options.</p>

Overview	<a href="#">Micro-Fit Connector System</a>
Product Name	Micro-Fit 3.0
UPC	800753818378

**Physical**

Breakaway	No
Circuits (Loaded)	8
Circuits (maximum)	8
Color - Resin	Black
Durability (mating cycles max)	30
Flammability	94V-0
Glow-Wire Capable	Yes
Mated Height	10.29mm

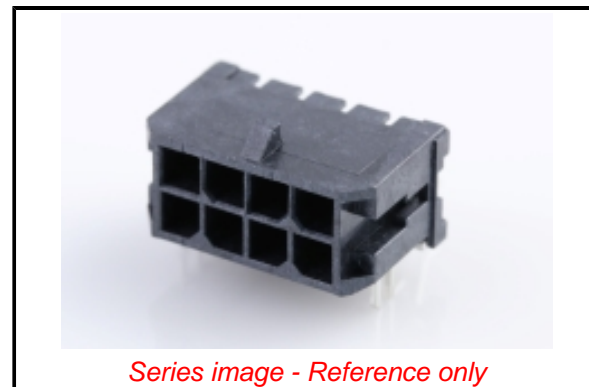

Series image - Reference only

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Contained Per -  
D(2021)4569-DC (8  
July 2021)  
Dibutylbis(pentane-2,4-  
dionato-O,O')tin  
2-ethylhexyl 10-  
ethyl-4,4-dioctyl-7-  
oxo-8-oxa-3,  
Phenol, 2-(2H-  
benzotriazol-2-yl)-4,6-  
bis(1,1-dim  
Ammonium-  
pentadecafluorooctanoate  
C.I. Direct Black 38  
Dibutyltin-dichloride  
1,2-diethoxyethane  
1,2-  
Benzenedicarboxylic  
acid, bis(3-  
methylbutyl)  
Disodium 3,3'-[[1,1'-  
Biphenyl]-4,4'-  
Diylbis(Azo)  
Octamethylcyclotetrasiloxane  
Decamethylcyclopentasiloxane  
Dodecamethylcyclohexasiloxane  
Octanoic acid,  
2,2,3,3,4,4,5,5,6,6,7,7,8,8,8-  
pen  
Benzo(ghi)perylene  
Dipentyl phthalate  
2-(2H-Benzotriazol-2-  
yl)-4,6-  
ditertpentylphenol  
Perfluorohexane-1-  
sulphonic acid and its  
salts

**China RoHS**

Material - Metal	Brass
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	1.371/g
Number of Rows	2
Orientation	Right Angle
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	3.00mm
Plating min - Mating	0.381µm
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Surface Mount Compatible (SMC)	N/A
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Surface Mount

#### Electrical

Current - Maximum per Contact	8.5A
Voltage - Maximum	600V

#### Solder Process Data

Duration at Max. Process Temperature (seconds)	030
Lead-free Process Capability	REFLOW
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	260

#### Material Info

#### Reference - Drawing Numbers

Application Specification	AS-43045-001-001
Packaging Specification	430450001-PK-000
Product Specification	430450001-PS-KO-000, 430450001-PS-SP-000, PS-43045-001
Sales Drawing	SD-43045-003-000
Symbol/Footprint Data	SYM-43045-0806-001
Test Summary	430450006-TS-000, TS-43045-001-001, TS-43045-002-001, TS-46235-001-001

Perfluorononan-1-oic acid  
(2,2,3,3,4,4,5,5,6,6,7  
Dioctyltin dilaurate,  
stannane, dioctyl-,  
bis(co  
Dodecachloropentacyclo[12.2.1.16,9.02,13.05,10]o  
Pyrene  
Fluoranthene  
Perfluorobutane  
sulfonic acid (PFBS)  
and its sal  
Tris(4-nonylphenyl,  
branched and linear)  
phosphi  
Nonadecafluorodecanoic  
acid (PFDA) and its  
sodi  
Zirconia  
Aluminosilicate  
Refractory Ceramic  
Fibr  
1,2-  
Benzenedicarboxylic  
acid, dipentyl ester, br  
diisohexyl phthalate  
1,2-  
Benzenedicarboxylic  
acid, dihexyl ester,  
bra  
2-(2H-Benzotriazol-2-  
yl)-4-(tert-butyl)-6-  
(sec-b  
2-(2H-Benzotriazol-2-  
yl)-4,6-  
ditertpentylphenol  
Cadmium  
Lead  
Lead(II,IV)-oxide  
Cadmium-oxide  
Diboron-trioxide  
Decabromodiphenylether  
1,2-bis(2-  
methoxyethoxy)ethane  
1,2-Dimethoxyethane  
bis(2-methoxyethyl)  
ether  
Tris(2-chloroethyl)  
phosphate  
Lead chromate  
molybdate sulfate red  
Lead chromate  
Bis(tributyltin) oxide  
Alkanes, C10-13,  
chloro  
Cobalt-dichloride  
Cadmium  
Dipentyl phthalate  
Imidazolidine-2-thione  
Phenanthrene  
N,N-  
Dimethylformamide  
4-aminoazobenzene  
[Phthalato(2-)]dioxotrilead

Silicic acid (H<sub>2</sub>Si<sub>2</sub>O<sub>5</sub>),  
barium salt (1:1),  
lead-  
Sulfurous Acid, Lead  
Salt, Dibasic  
Cyanamide, lead(2+)  
salt (1:1)  
Lead titanium  
zirconium oxide  
Dioxobis(stearato)trilead  
Tetralead-trioxide-  
sulphate  
Pentalead-tetraoxide-  
sulphate  
Lead-titanium-trioxide  
Lead-dinitrate

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

**Search Parts in this Series**

[43045](#) Series

**Mates With**

Micro-Fit 3.0 Receptacle Housing [43025](#)  
<br>Micro-Fit 3.0 TPA Receptacle Housing  
[172952](#) <br> Micro-Fit 3.0 Cable Assembly  
[214755](#) , [214756](#)

This document was generated on 08/31/2021

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)  
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)