

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0432550153](#)
Status: **Active**
Overview: [MLX Power Connectors](#)
Description: 6.35mm Pitch MLX Power Connector Header, 2.13mm Contact Diameter, Vertical, with Plastic Polarizing Peg, 12 Circuits, PA Polyamide Nylon 6/6 94V-2, Tin (Sn) Plating, Natural (Nylon Off Natural), Lead-Free

Documents:

| | |
|--|--|
| Drawing (PDF) | Packaging Specification PK-43255-001-001 (PDF) |
| 3D Model (PDF) | Packaging Specification PK-43255-003-001 (PDF) |
| 3D Model | Datasheet (PDF) |
| Product Specification PSX-42002-0001-001 (PDF) | RoHS Certificate of Compliance (PDF) |

Agency Certification


| | |
|-----|---------|
| CSA | LR19980 |
| UL | E29179 |

General

| | |
|----------------|--------------------------------------|
| Product Family | PCB Headers |
| Series | 43255 |
| Application | Board-to-Board, Power, Wire-to-Board |
| Comments | High Vibration Application |
| Overview | MLX Power Connectors |
| Product Name | MLX |
| UPC | 800753948945 |

Physical

| | |
|--------------------------------|-----------------|
| Breakaway | No |
| Circuits (Loaded) | 12 |
| Circuits (maximum) | 12 |
| Color - Resin | Natural |
| Durability (mating cycles max) | 50 |
| First Mate / Last Break | No |
| Flammability | 94V-2 |
| Glow-Wire Capable | No |
| Keying to Mating Part | Yes |
| Lock to Mating Part | Yes |
| Mated Height | 30.35mm |
| Material - Metal | Phosphor Bronze |
| Material - Plating Mating | Tin |
| Material - Plating Termination | Tin |
| Material - Resin | Nylon |
| Net Weight | 6.459/g |
| Number of Rows | 3 |
| Orientation | Vertical |
| PC Tail Length | 4.30mm |
| PCB Locator | Yes |
| PCB Retention | Yes |
| PCB Thickness - Recommended | 1.60mm |
| Packaging Type | Tray |
| Pitch - Mating Interface | 6.35mm |
| Pitch - Termination Interface | 6.35mm |
| Polarized to Mating Part | Yes |
| Polarized to PCB | Yes |
| Shrouded | Fully |
| Stackable | No |
| Surface Mount Compatible (SMC) | No |

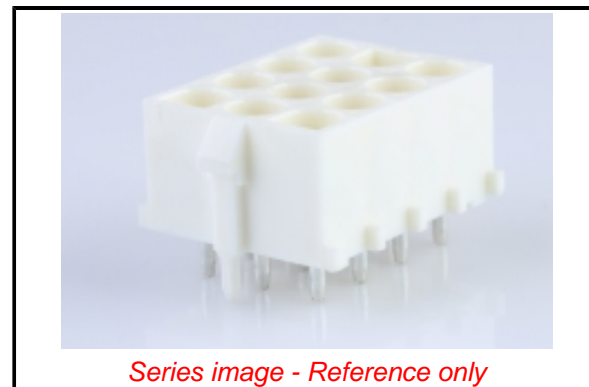

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2021)4569-DC (8
July 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[43255](#) Series

Mates With

[42021](#) MLX Power Crimp Housing Plug,
[42023](#) MLX Crimp Terminal, [42024](#) MLX
Crimp Terminal

Temperature Range - Operating -55° to +105°C
Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 20.0A, 9.0A
Voltage - Maximum 600V

Solder Process Data

Lead-freeProcess Capability WAVE

Material Info

Reference - Drawing Numbers

Packaging Specification PK-43255-001-001, PK-43255-003-001
Product Specification PSX-42002-0001-001
Sales Drawing SDA-43255-00XX-001

This document was generated on 09/13/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pin & Socket Connectors](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[6450822-1](#) [770392-1](#) [794042-1](#) [796885-1](#) [8-794535-1](#) [PLR3455ACS-222](#) [R929991004](#) [R929993003](#) [1403611-1](#) [1-480349-5](#) [152302-5](#)
[153211-2](#) [1586092-1](#) [1586129-1](#) [1586681-4](#) [1586700-1](#) [1586368-1](#) [1586380-1](#) [1586616-1](#) [1586680-5](#) [16-06-0038](#) [164164-5](#) [1-6609930-1](#)
[172296-1](#) [19-09-2035](#) [200503-1](#) [200788-2](#) [2029090-4](#) [2029095-4](#) [925061-7](#) [293734-4](#) [293737-2](#) [1-765362-4](#) [1871534-1](#) [200833-4](#)
[2008625-2](#) [2029027-2](#) [2029096-4](#) [R929991000](#) [R929991002](#) [R929993000](#) [319-10-101-00-005000](#) [319-10-102-00-001000](#) [319-10-104-00-001000](#) [319-10-105-00-001000](#) [319-10-108-00-001000](#) [319-10-112-00-006000](#) [39-01-8019](#) [319-10-101-00-001000](#) [319-10-102-00-005000](#)