

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0436400410](#)  
**Status:** **Active**  
**Overview:** [Micro-Fit Connector System](#)  
**Description:** Micro-Fit 3.0 Plug Housing, Single Row, 4 Circuits, UL 94V-2, Panel Mount Ears, Glow-Wire Capable, Black

**Documents:**

<a href="#">3D Model</a>	<a href="#">Test Summary 430450005-TS-000 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Test Summary 430450006-TS-000 (PDF)</a>
<a href="#">3D Model (PDF)</a>	<a href="#">Test Summary TS-43045-001-001 (PDF)</a>
<a href="#">Product Specification 436500001-PS-JA-000 (PDF)</a>	<a href="#">Test Summary TS-43045-002-001 (PDF)</a>
<a href="#">Product Specification 436500001-PS-KO-000 (PDF)</a>	<a href="#">Test Summary TS-43045-003-001 (PDF)</a>
<a href="#">Product Specification 436500001-PS-SP-000 (PDF)</a>	<a href="#">Test Summary TS-46235-001-001 (PDF)</a>
<a href="#">Product Specification PS-43650-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>
<a href="#">Packaging Specification PK-43640-003-001 (PDF)</a>	<a href="#">Product Literature (PDF)</a>

**Agency Certification**

CSA LR19980


**General**

Product Family Crimp Housings  
 Series [43640](#)  
 Application Power, Wire-to-Wire  
 Comments This Molex product is manufactured from material that has the following ratings, tested by independent agencies: <br>a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13. <br>b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12 and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. <br><br>The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). <br><br>If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options.

Overview [Micro-Fit Connector System](#)  
 Product Name Micro-Fit 3.0  
 UPC 889056722384

**Physical**

Circuits (maximum) 4  
 Color - Resin Black  
 Flammability 94V-0  
 Gender Plug  
 Glow-Wire Capable Yes  
 Keying to Mating Part None  
 Lock to Mating Part Yes  
 Material - Resin Nylon  
 Net Weight 0.692/g  
 Number of Rows 1  
 Packaging Type Bag

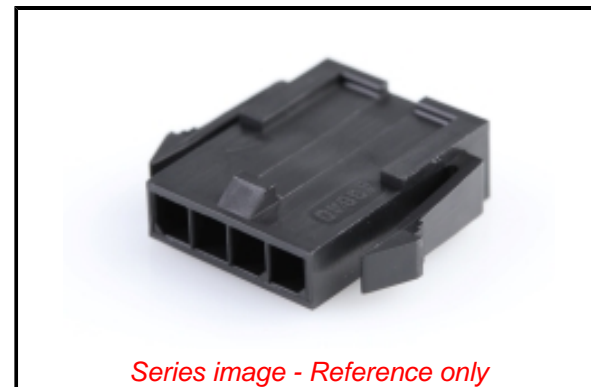

Series image - Reference only

**EU ELV  
Compliant**

**EU RoHS  
Compliant  
REACH SVHC**

Not Contained Per -  
D(2021)4569-DC (8  
July 2021)

**Halogen-Free  
Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS	Green Image
ELV	Compliant
RoHS Phthalates	Not Contained

**Search Parts in this Series**  
[43640 Series](#)

**Mates With**

Micro-Fit 3.0 Receptacle Housing [43645](#)  
 <br>Micro-Fit TPA Cable Assembly [145132](#)  
 <br>Micro-Fit 3.0 Cable Assembly [214750](#) ,  
[214751](#)

**Use With**

Micro-Fit 3.0 Crimp Terminals [43031](#) <br>  
 Micro-Fit 3.0 Pre-Crimped Lead [214762](#) ,  
[214763](#)

Panel Mount	Yes
Pitch - Mating Interface	3.00mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-40° to +125°C

**Material Info**

**Reference - Drawing Numbers**

Packaging Specification	PK-43640-003-001
Product Specification	436500001-PS-JA-000, 436500001-PS-KO-000, 436500001-PS-SP-000, PS-43650-001
Sales Drawing	SD-43640-002-001
Test Summary	430450005-TS-000, 430450006-TS-000, TS-43045-001-001, TS-43045-002-001, TS-43045-003-001, TS-46235-001-001

This document was generated on 10/05/2021

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)  
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-](#)  
[5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-](#)  
[367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)