



# PRODUCT SPECIFICATION

## MICRO-FIT SINGLE ROW CONNECTOR SYSTEM

### 1.0 SCOPE

This Product Specification covers the performance requirements and test methods of Micro-Fit 3.00 mm (.118 inch) centerline (pitch) wire to board and wire to wire connector systems terminated with 18 to 30 AWG stranded wire using crimp technology with tin or gold plating.

### 2.0 PRODUCT DESCRIPTION

#### 2.1 PRODUCT NAME AND SERIES NUMBERS

Receptacle: 43645                      Female Crimp Terminal: 43030  
TPA Receptacle: 171850              Male Crimp Terminal: 43031  
TPA Plug: 200875  
Plug: 43640  
Headers: 43650  
Test Plug: 44242 (recommended for continuity testing only)  
Other products conforming to this specification are noted on the individual drawings.

#### 2.2 DIMENSIONS, MATERIALS, PLATINGS AND MARKINGS

Housings: Receptacle and Plug - Polyester, Nylon; Headers - LCP  
Crimp Terminals: Phosphor Bronze  
Pins: Brass

#### 2.3 SAFETY AGENCY APPROVALS

UL File Number: E29179  
CSA: LR19980  
*IEC 61984 Certification: Tested to and found in compliance with IEC 61984. NRTL type examination certificate available from Molex upon request. Contact Molex Safety Agency team for questions regarding certification on specific part numbers.*

### 3.0 APPLICABLE DOCUMENTS AND SPECIFICATIONS

Test Summary: TS-43045-001  
Application Spec: AS-45499-001 (moisturizing nylon parts)

### 4.0 RATINGS

#### 4.1 SAFETY AGENCY RATINGS

Series	Agency Voltage Rating (AC RMS or DC)			Agency Current Rating (Single Circuit) (Amps)		
	UL	CSA	IEC	UL	CSA	IEC
43640	250	600	250	5	7	5
200875	250	600	250	5	7	5
43645	600	600	250	8	8	5
43650	600	600	250	8	8	5
171850	600	600	250	5	7	5

(Current ratings are maximum and may vary depending on wire size, circuit count, and end-use application. Further testing may be required in the end-use application.)

REVISION: <b>N</b>	ECR/ECN INFORMATION: EC No: <b>UCP2018-0645</b> DATE: <b>2017/10/27</b>	TITLE: <b>PRODUCT SPECIFICATION MICRO-FIT SINGLE ROW CONNECTORS</b>	SHEET No. <b>1 of 9</b>
DOCUMENT NUMBER: <b>PS-43650</b>	CREATED / REVISED BY: <b>SSOUSEK</b>	CHECKED BY: <b>JBELL</b>	APPROVED BY: <b>FSMITH</b>



# PRODUCT SPECIFICATION

## 4.2 CURRENT DERATING AND APPLICABLE WIRES

Current is dependent on connector size, contact material, plating, ambient temperature, printed circuit board characteristics and related factors. Actual current rating is application dependent and should be evaluated for each application.

<u>Stranded Copper Wire Size</u>	<u>Max. Outside Insulation Diameter</u>
18 AWG	1.85 mm (.073 inch)
0.75 mm <sup>2</sup>	1.85 mm (.073 inch)
20 AWG	1.85 mm (.073 inch)
22 AWG	1.85 mm (.073 inch)
24 AWG	1.85 mm (.073 inch)
26 AWG	1.27 mm (.050 inch)
28 AWG	1.27 mm (.050 inch)
30 AWG	1.27 mm (.050 inch)

CURRENT DERATING REFERENCE INFORMATION						
AWG and Metric Wire Size	2-circuit		6-circuit		12-circuit	
	W-W	W-B	W-W	W-B	W-W	W-B
	Amps	Amps	Amps	Amps	Amps	Amps
18	7	8.5	6.5	7	6.5	6.5
20 AWG or 0.75mm <sup>2</sup>	6.5	7	5	* 5.5	4.5	* 5
22	5.5	* 6	* 4	* 4.5	* 3.5	* 4
24	5	5.5	4	* 4.5	3	* 3.5
26	4	4.5	3	* 4	2.5	* 3.5
28	3	* 4	* 2	* 3	* 2	* 3
30	3	3.5	2	* 3	2	* 2.5

- 1) Values are for REFERENCE ONLY.
- 2) Current de-ratings are based on not exceeding 30°C Temperature Rise.
- 3) Testing conducted using tinned stranded copper wire and tin plated terminals.
- 4) PCB trace design can greatly affect temperature rise results in Wire-to-Board applications.
- 5) Data is for all circuits powered.
- 6) \* indicates interpolated information.
- 7) **W-W:** Wire-to-Wire     **W-B:** Wire-to-Board

REVISION: <b>N</b>	ECR/ECN INFORMATION: EC No: <b>UCP2018-0645</b> DATE: <b>2017/10/27</b>	TITLE: <b>PRODUCT SPECIFICATION MICRO-FIT SINGLE ROW CONNECTORS</b>	SHEET No. <b>2 of 9</b>
DOCUMENT NUMBER: <b>PS-43650</b>	CREATED / REVISED BY: <b>SSOUSEK</b>	CHECKED BY: <b>JBELL</b>	APPROVED BY: <b>FSMITH</b>



# PRODUCT SPECIFICATION

## 4.3 CURRENT FOR TEST PLUG 44242

2.5 Amps Maximum (Pogo pin current capacity)

Test plugs are for testing purposes only and not intended for continuous use.

## 4.4 TEMPERATURE

Operating: - 40°C to + 105°C (Including Terminal Temperature Rise)

Nonoperating: - 40°C to + 105°C

REVISION: <b>N</b>	ECR/ECN INFORMATION: EC No: <b>UCP2018-0645</b> DATE: <b>2017/10/27</b>	TITLE: <b>PRODUCT SPECIFICATION MICRO-FIT SINGLE ROW CONNECTORS</b>	SHEET No. <b>3 of 9</b>
DOCUMENT NUMBER: <b>PS-43650</b>	CREATED / REVISED BY: <b>SSOUSEK</b>	CHECKED BY: <b>JBELL</b>	APPROVED BY: <b>FSMITH</b>



# PRODUCT SPECIFICATION

## 5.0 PERFORMANCE

### 5.1 ELECTRICAL REQUIREMENTS

DESCRIPTION	TEST CONDITION	REQUIREMENT
<b>Contact Resistance (Low Level)</b>	Mate connectors: apply a maximum voltage of 20 mV and a current of 100 mA. (Does not include wire resistance)	10 milliohms MAXIMUM [initial]
<b>Contact Resistance of Wire Termination (Low Level)</b>	Terminate the applicable wire to the terminal and measure wire using a voltage of 20 mV and a current of 100 mA.	5 milliohms MAXIMUM [initial]
<b>Insulation Resistance</b>	Unmate & unmount connectors: apply a voltage of 500 VDC between adjacent terminals and between terminals to ground.	1000 Megohms MINIMUM
<b>Dielectric Withstanding Voltage</b>	Unmate connectors: apply a voltage of {two times the rated voltage plus 1000 volts} VAC for 1 minute between adjacent terminals and between terminals to ground.	No breakdown; current leakage < 5 mA
<b>Capacitance</b>	Measure between adjacent terminals at 1 MHz.	2 picofarads MAXIMUM
<b>Temperature Rise (via Current Cycling)</b>	Mate connectors: measure the temperature rise at the rated current after: 1) 96 hours (steady state) 2) 240 hours (45 minutes ON and 15 minutes OFF per hour) 3) 96 hours (steady state)	Temperature rise: +30°C MAXIMUM

REVISION: <b>N</b>	ECR/ECN INFORMATION: EC No: <b>UCP2018-0645</b> DATE: <b>2017/10/27</b>	TITLE: <b>PRODUCT SPECIFICATION MICRO-FIT SINGLE ROW CONNECTORS</b>	SHEET No. <b>4 of 9</b>
DOCUMENT NUMBER: <b>PS-43650</b>	CREATED / REVISED BY: <b>SSOUSEK</b>	CHECKED BY: <b>JBELL</b>	APPROVED BY: <b>FSMITH</b>



# PRODUCT SPECIFICATION

## 5.2 MECHANICAL REQUIREMENTS

DESCRIPTION	TEST CONDITION	REQUIREMENT
<b>Connector Mate and Unmate Forces</b>	Mate and unmate connector (male to female) at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute. (per circuit)	8.0 N (1.8 lbf) MAXIMUM insertion force & 2.4 N (0.5 lbf) MINIMUM withdrawal force
<b>Crimp Terminal Retention Force (in Housing)</b>	Axial pullout force on the terminal in the housing at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute.	24.5 N (5.5 lbf) MINIMUM retention force
<b>Crimp Terminal Insertion Force (into Housing)</b>	Apply an axial insertion force on the terminal at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute.	14.7 N (3.3 lbf) MAXIMUM insertion force
<b>Durability</b>	Mate connectors up to 30 cycles at a maximum rate of 10 cycles per minute	20 milliohms MAXIMUM (change from initial)
<b>Vibration (Random)</b>	Mate connectors and vibrate per EIA 364-28, test condition VII, Letter D. Test Duration: 15 minutes each axis.	20 milliohms MAXIMUM (change from initial) & Discontinuity < 1 microsecond
<b>Shock (Mechanical)</b>	Mate connectors and shock at 50 g's with ½ sine wave (11 milliseconds) shocks in the ±X,±Y,±Z axes (18 shocks total). (Per EIA-364-27, Test Condition H)	20 milliohms MAXIMUM (change from initial) & Discontinuity < 1 microsecond
<b>Wire Pullout Force (Axial)</b>	Apply an axial pullout force on the wire at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute.	MINIMUM pullout force 18 awg: 89.0 N (20.0 lbf) 0.75 mm2: 89.0 N (20.0 lbf) 20 awg: 57.8 N (13.0 lbf) 22 awg: 35.6 N (8.0 lbf) 24 awg: 22.2 N (5.0 lbf) 26 awg: 13.3 N (3.0 lbf) 28 awg: 8.9 N (2.0 lbf) 30 awg: 6.6 N (1.5 lbf)  Values may vary depending on crimp tooling. Refer to Molex Applicator Tooling Specification.
<b>Normal Force</b>	Apply a perpendicular force.	2.7 N (0.6 lbf) MINIMUM
<b>Pin to Header Retention</b>	Apply axial push force to pin at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute.	13.7 N (3.1 lbf) MINIMUM pushout force
<b>Thumb Latch to Ramp Yield Strength</b>	Full mate and then Unmate the connectors at a rate of 25 ± 6 mm (1 ± ¼ inch) per minute.	68.4 N (15.4 lbf) MINIMUM Yield Strength

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
<b>N</b>	EC No: <b>UCP2018-0645</b> DATE: <b>2017/10/27</b>	<b>PRODUCT SPECIFICATION MICRO-FIT SINGLE ROW CONNECTORS</b>	<b>5 of 9</b>
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
<b>PS-43650</b>	<b>SSOUSEK</b>	<b>JBELL</b>	<b>FSMITH</b>



# PRODUCT SPECIFICATION

## 5.3 ENVIRONMENTAL REQUIREMENTS

DESCRIPTION	TEST CONDITION	REQUIREMENT
<b>Thermal Aging</b>	Mate connectors; expose to: 240 hours at 105 ± 2°C OR 500 hours at 85 ± 2°C	20 milliohms MAXIMUM (change from initial)
<b>Humidity (Steady State)</b>	Mate connectors: expose to a temperature of 40 ± 2°C with a relative humidity of 90-95% for 96 hours.  Note: Remove surface moisture and air dry for 1 hour prior to measurements.	20 milliohms MAXIMUM (change from initial) & Dielectric Withstanding Voltage: No Breakdown at 500 VAC & Insulation Resistance: 1000 Megohms MINIMUM
<b>Solderability</b>	Per SMES-152	Solder coverage: 95% MINIMUM (per SMES-152)
<b>Solder Resistance</b>	<b>A) Wave Solder Process</b> Dip connector terminal tails in solder; Solder Duration: 10 seconds MAX Solder Temperature: 260°C MAX Per AS-40000-5013  <b>B) Convection Reflow Solder Process</b> 260°C MAX Per AS-40000-5013	Visual: No Damage to insulator material
<b>Salt Spray</b>	Mate connectors Orientation: Horizontal, latch on top surface Duration: 48 hours exposure Atmosphere: Salt spray from a 5% solution Temperature: 35 ± 2°C	20 milliohms MAXIMUM (change from initial)
<b>Cold Resistance</b>	Mate connectors: Duration: 96 hours; Temperature: -40 ± 3°C	20 milliohms MAXIMUM (change from initial)

## 6.0 PACKAGING

Parts shall be packaged to protect against damage during handling, transit and storage per the packaging specifications listed below:

Receptacle, TPA Receptacle and Plug: Bulk Packaged  
Headers: PK-70873-0321, PK-70873-0811, PK-70873-07\*\*

REVISION: <b>N</b>	ECR/ECN INFORMATION: EC No: <b>UCP2018-0645</b> DATE: <b>2017/10/27</b>	TITLE: <b>PRODUCT SPECIFICATION MICRO-FIT SINGLE ROW CONNECTORS</b>	SHEET No. <b>6 of 9</b>
DOCUMENT NUMBER: <b>PS-43650</b>	CREATED / REVISED BY: <b>SSOUSEK</b>	CHECKED BY: <b>JBELL</b>	APPROVED BY: <b>FSMITH</b>



# PRODUCT SPECIFICATION

## 7.0 GAGES AND FIXTURES


It is recommended that test plugs (Series 44242) be used for continuity testing of receptacles. Standard mating parts should not be used for harness testing.

NOTE: The use of unauthorized testing devices and/or probes with a Molex product may cause damage to and affect functionality of the Molex product, and such use may void any and all warranties, expressed or implied.

## 8.0 OTHER INFORMATION

### 8.1 CABLE TIE AND OR WIRE TWIST LOCATION

CKT Sizes	Dim T	Min.
2-4	.500	(12.70)
5-8	.750	(19.10)
9-12	1.000	(25.40)

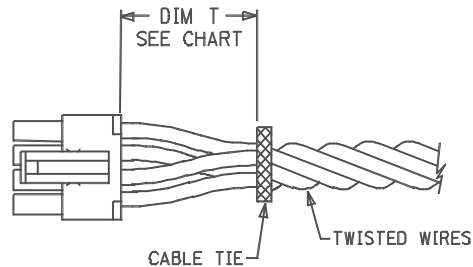

The "T" dimension defines a "free" length of wire, or a length of wire that is not subject to significant bias by external factors such as a wire tie, wire twisting, or other means of bending or deforming of the wires that repositions them from their natural relaxed state or location where they enter the housing. Wires are to be dressed in such a manner to allow the terminals to float freely in the pocket.

### 8.2 CONTACT ENGAGEMENT (WIPE) FOR FULLY MATED NOMINAL COMPONENTS (FOR REFERENCE ONLY)

Receptacle	Mated to Plug/ Header	Application	Contact Wipe (nominal)
43645 Receptacle <sup>(1)</sup>	43640 Plug	Wire-to-Wire	0.083 in/(2.11 mm)
	43650 Header	Wire-to-Board	0.069 in/(1.75mm)
171850 TPA Receptacle <sup>(1)</sup>	43640 Plug	Wire-to-Wire	0.072 in/(1.84mm)
	43650 Header	Wire-to-Board	0.063 in/(1.60mm)
	200875 TPA Plug	Wire-to-Wire	0.068 in/(1.72mm)


**Note (1):** Contact Wipe is based on 43030 female crimp terminal. If using 46235 female crimp terminal, reduce Contact Wipe by .005 in/(0.13 mm).

REVISION: <b>N</b>	ECR/ECN INFORMATION: EC No: <b>UCP2018-0645</b> DATE: <b>2017/10/27</b>	TITLE: <b>PRODUCT SPECIFICATION MICRO-FIT SINGLE ROW CONNECTORS</b>	SHEET No. <b>7 of 9</b>
DOCUMENT NUMBER: <b>PS-43650</b>	CREATED / REVISED BY: <b>SSOUSEK</b>	CHECKED BY: <b>JBELL</b>	APPROVED BY: <b>FSMITH</b>




# PRODUCT SPECIFICATION


## 8.3 STANDARD POLARIZATION FOR HEADERS AND PLUGS (HEADERS ARE SHOWN)

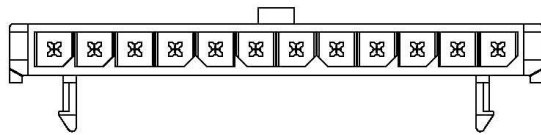


12-CKT.




11-CKT.

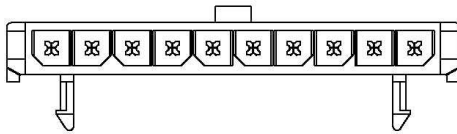


10-CKT.

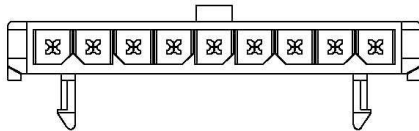


9-CKT.

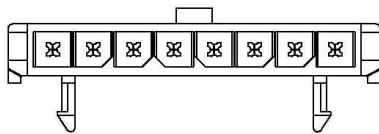


8-CKT.




2-CKT.




3-CKT.




4-CKT.



5-CKT.



6-CKT.



7-CKT.


REVISION: <b>N</b>	ECR/ECN INFORMATION: EC No: <b>UCP2018-0645</b> DATE: <b>2017/10/27</b>	TITLE: <b>PRODUCT SPECIFICATION MICRO-FIT SINGLE ROW CONNECTORS</b>	SHEET No. <b>8 of 9</b>
DOCUMENT NUMBER: <b>PS-43650</b>	CREATED / REVISED BY: <b>SSOUSEK</b>	CHECKED BY: <b>JBELL</b>	APPROVED BY: <b>FSMITH</b>






# PRODUCT SPECIFICATION


## 8.4 STANDARD POLARIZATION FOR RECEPTACLES




12-CKT.




11-CKT.




10-CKT.




9-CKT.




8-CKT.




2-CKT.




3-CKT.




4-CKT.



5-CKT.



6-CKT.



7-CKT.

REVISION: <b>N</b>	ECR/ECN INFORMATION: EC No: <b>UCP2018-0645</b> DATE: <b>2017/10/27</b>	TITLE: <b>PRODUCT SPECIFICATION MICRO-FIT SINGLE ROW CONNECTORS</b>	SHEET No. <b>9 of 9</b>
DOCUMENT NUMBER: <b>PS-43650</b>	CREATED / REVISED BY: <b>SSOUSEK</b>	CHECKED BY: <b>JBELL</b>	APPROVED BY: <b>FSMITH</b>

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)  
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-](#)  
[5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-](#)  
[367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)