

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0462071104](#)

Status: **Active**

Overview: Mini-Fit Jr. Power Connectors

Description: 4.20mm Pitch, Mini-Fit Jr. Reflow Solder Capable Header, Dual Row, Vertical, 4 Circuits, 2.36mm PCB Thickness, without PCB Pegs, LCP Housing, with Tin (Sn) Over Nickel (Ni) Plating, Glow-Wire Capable, Tray

Documents:

[3D Model \(PDF\)](#)

[Drawing \(PDF\)](#)

[3D Model](#)

[Product Specification PS-45750-001-001 \(PDF\)](#)

[Product Specification PS-5556-004-001 \(PDF\)](#)

[Packaging Specification PK-46207-001-000 \(PDF\)](#)

[Symbol Footprint Data SYM-46207-1004 \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980

UL E29179

General

Product Family PCB Headers

Series [46207](#)

Application Board-to-Board, Power, Wire-to-Board

Comments Current for wire-to-wire applications = 13.0A max. per circuit. Current for wire-to-board applications = 9.0A max. per circuit

Overview [Mini-Fit Jr. Power Connectors](#)

Product Name Mini-Fit Jr.

UPC 883906250898

Physical

Breakaway No

Circuits (Loaded) 4

Circuits (maximum) 4

Color - Resin Black

Durability (mating cycles max) 100

First Mate / Last Break No

Flammability 94V-0

Glow-Wire Capable Yes

Guide to Mating Part No

Lock to Mating Part Yes

Material - Metal Brass

Material - Plating Mating Matte Tin

Material - Plating Termination Matte Tin

Material - Resin High Temperature Thermoplastic

Net Weight 1.615/g

Number of Rows 2

Orientation Vertical

PC Tail Length 4.46mm

PCB Locator Yes

PCB Retention Yes

PCB Thickness - Recommended 2.36mm

Packaging Type Tray

Pitch - Mating Interface 4.20mm


Pitch - Termination Interface 4.20mm

Polarized to Mating Part Yes

Polarized to PCB Yes

Shrouded Fully

Stackable No

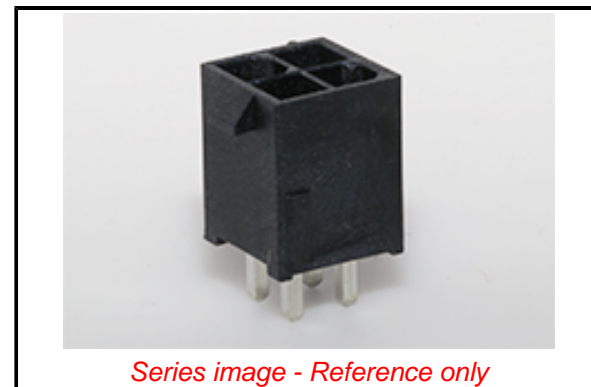

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - D(2020)4578-DC (25 June 2020)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[46207 Series](#)

Mates With

[5557](#) Mini Fit Jr. Receptacle, [172708](#) Mini-Fit TPA2 Receptacle Housing

Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole

Electrical

Current - Maximum per Contact	13.0A
Voltage - Maximum	600V AC (RMS)/DC

Solder Process Data

Duration at Max. Process Temperature (seconds)	030
Lead-free Process Capability	SMC&WAVE
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	265

Material Info**Reference - Drawing Numbers**

Packaging Specification	PK-46207-001-000
Product Specification	PS-45750-001-001, PS-5556-004-001
Sales Drawing	SD-46207-002-000
Symbol/Footprint Data	SYM-46207-1004

This document was generated on 08/05/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [MOLEX](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)