

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0465574145**
Status: **Active**
Overview: SEARAY and SEARAY Slim Mezzanine Family
Description: SEARAY Slim Receptacle, 160 Circuits, 5.00mm Unmated Height, 4 Rows, with Pegs, Solder Charge Lead-Free

Documents:

| | |
|--|--|
| 3D Model (PDF) | Application Specification AS-45970-002-001 (PDF) |
| 3D Model | Application Specification AS-45970-990-001 (PDF) |
| Drawing (PDF) | Packaging Specification PK-45971-002-001 (PDF) |
| Product Specification PS-45970-001-001 (PDF) | Test Summary TS-45970-002-001 (PDF) |
| Product Specification TS-45970-001-001 (PDF) | Symbol Footprint Data SYM-46557-4145-001 (PDF) |
| Application Specification AS-45970-001-001 (PDF) | RoHS Certificate of Compliance (PDF) |

Agency Certification


| | |
|-----|---------|
| CSA | LR19980 |
| UL | E29179 |

General

| | |
|------------------|---|
| Product Family | PCB Receptacles |
| Series | 46557 |
| Application | Board-to-Board, Signal |
| Electrical Model | Yes |
| Overview | SEARAY and SEARAY Slim Mezzanine Family |
| Product Name | SEARAY |
| UPC | 883906136864 |

Physical

| | |
|--------------------------------|--------------------------------|
| Circuits (Loaded) | 160 |
| Circuits (maximum) | 160 |
| Color - Resin | Black |
| Durability (mating cycles max) | 100 |
| Flammability | 94V-0 |
| Glow-Wire Capable | No |
| Guide to Mating Part | No |
| Keying to Mating Part | Yes |
| Lock to Mating Part | No |
| Material - Metal | Copper Alloy |
| Material - Plating Mating | Gold |
| Material - Plating Termination | Tin |
| Material - Resin | High Temperature Thermoplastic |
| Net Weight | 1.962/g |
| Number of Rows | 4 |
| Orientation | Vertical |
| PCB Locator | Yes |
| PCB Retention | Yes |
| PCB Thickness - Recommended | 2.18mm |
| Packaging Type | Embossed Tape on Reel |
| Pitch - Mating Interface | 1.27mm |
| Pitch - Termination Interface | 1.27mm |
| Plating min - Mating | 0.762µm |
| Plating min - Termination | 2.540µm |
| Polarized to Mating Part | Yes |
| Polarized to PCB | Yes |
| Robotic Placement | Pick and Place Cap |
| Stackable | No |
| Surface Mount Compatible (SMC) | Yes |

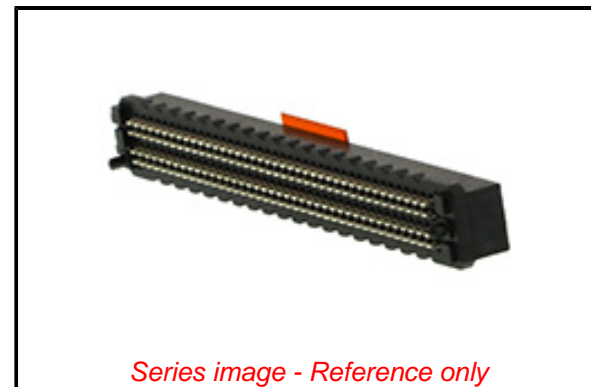

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2021)4569-DC (8
July 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

46557 Series

Mates With

46556 SEARAY Slim Plug

| | |
|-------------------------------|----------------|
| Temperature Range - Operating | -55° to +125°C |
| Termination Interface: Style | Surface Mount |
| Unmated Height | 5.00mm |

Electrical

| | |
|-------------------------------|---------|
| Current - Maximum per Contact | 2.7A |
| Grounding to PCB | No |
| Voltage - Maximum | 240V AC |

Solder Process Data

| | |
|--|--------|
| Duration at Max. Process Temperature (seconds) | 020 |
| Lead-free Process Capability | REFLOW |
| Max. Cycles at Max. Process Temperature | 003 |
| Process Temperature max. C | 260 |

Material Info**Reference - Drawing Numbers**

| | |
|---------------------------|---|
| Application Specification | AS-45970-001-001, AS-45970-002-001, AS-45970-990-001 |
| Electrical Model Document | EE-45970-010-010, EE-46556-0085-001 |
| Packaging Specification | PK-45971-002-001 |
| Product Specification | PS-45970-001-001, TS-45970-001-001 |
| S-Parameter Model | SP-45970-010-010, SP-46556-0085-001 |
| Sales Drawing | SD-46557-001-001 |
| Symbol/Footprint Data | SYM-46557-4145-001 |
| Test Summary | TS-45970-002-001 |

This document was generated on 12/27/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board to Board & Mezzanine Connectors](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[589158040000018](#) [MDF7C-18P-2.54DSA\(55\)](#) [FCN-230C068-11](#) [FCN-268F012-G/BD](#) [FCN-268F036-G/BD](#) [FCN-268M012-G/0D](#) [FCN-268M024-G/1D](#) [FCN-723J004/1](#) [MIS-048-01-F-D-DP-K](#) [832-10-034-10-001000](#) [FX4C-80S-1.27DSA](#) [FCN-214Q030-G/0](#) [FCN-234P048-G/0](#) [FCN-235D050-G/C](#) [210-93-314-41-105000](#) [2-22603-0](#) [MDF7-40DP-2.54DSA\(55\)](#) [AXG720047](#) [5031084030](#) [MIT-114-03-F-D-K](#) [55323-1519](#) [DF33-2P-3.3DSA\(24\)](#) [YFT-20-05-H-03-SB-K](#) [503308-3040](#) [026-6203-PDB](#) [027-6203-PDB](#) [069159702701000](#) [10123981-102LF](#) [101A10019X](#) [55650-0588-C](#) [68682-310LF](#) [68684-306](#) [75140-7012](#) [87471-650](#) [194261-1](#) [FCN-268F024-G0D](#) [10124054-515LF](#) [68685-603](#) [8-1616154-3](#) [MIS-019-01-F-D](#) [FCN-268M024-G/3D](#) [FCN-268M036-G/BD](#) [20021832-06016C1LF](#) [KX15-20KLDL-E1000E](#) [AXE810124](#) [FCN-214J100-G/0](#) [FCN-230C068-E/S](#) [AXE812124](#) [AXE816124](#) [AXE720127](#)