


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** **0465621005**  
**Status:** **Active**  
**Overview:** EXTreme Ten60Power High-Current Connector  
**Description:** 2.00mm, 5.50mm Pitch EXTreme Ten60Power Right-Angle Receptacle Assembly with Guide Receiver, 32 Signal Circuits, 8 Power Circuits

**Documents:**

<a href="#">Drawing (PDF)</a>	<a href="#">Packaging Specification PK-46562-003-001 (PDF)</a>
<a href="#">Product Specification PS-46436-100-001 (PDF)</a>	<a href="#">Test Summary 464361000-TS-000 (PDF)</a>
<a href="#">Application Specification AS-46436-100-001 (PDF)</a>	<a href="#">Datasheet (PDF)</a>
<a href="#">Packaging Specification PK-46562-002-000 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>

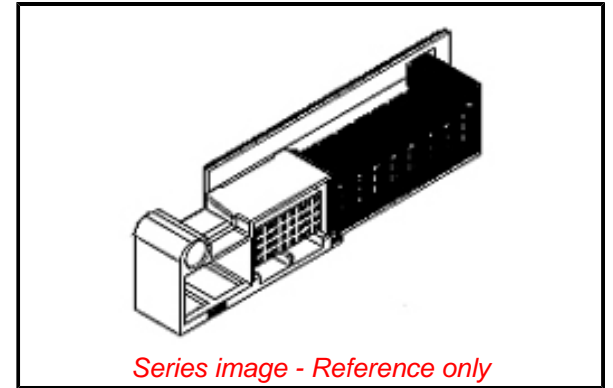

**Agency Certification**

CSA	LR19980
UL	E29179

**Application tooling part link**

Application Tooling Part Link	62100-7900
-------------------------------	------------

**General**

Product Family	PCB Receptacles
Series	46562
Application	Board-to-Board, Power, Signal
Comments	See PS-46436-100 for details
Overview	<a href="#">EXTreme Ten60Power High-Current Connector</a>
Product Name	EXTreme Ten60Power
UPC	883906050023

**Physical**

(p)ower-(s)ignal Configuration	8p - 32s
Circuits (Loaded)	40
Circuits (maximum)	40
Color - Resin	Black
Durability (mating cycles max)	200
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	Yes
Keying to Mating Part	None
Lock to Mating Part	No
Material - Metal	Copper
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	14.378/g
Number of Rows	1
Orientation	Vertical
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.58mm
Packaging Type	Tray
Pitch - Mating Interface	2.00mm, 5.50mm
Plating min - Mating	0.127µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Stackable	No
Surface Mount Compatible (SMC)	No

**EU ELV**

**Not Reviewed**

**EU RoHS**

**Not Reviewed**

**REACH SVHC**

Not Reviewed

**Halogen-Free**

**Status**

**Not Reviewed**

For more information, please visit [Contact US](#)

China ROHS

Not Reviewed

ELV

Not Reviewed

RoHS Phthalates

Not Reviewed

**China RoHS**

**Search Parts in this Series**

46562 Series

**Mates With**

464371082 EXTreme Ten60Power Right Angle Plug Assembly

**Application Tooling | FAQ**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

**Description**

**Product #**

Removal Tool  
for Ten60 Power  
Receptacle  
Terminals

621007900

Temperature Range - Operating -40° to +105°C  
Termination Interface: Style Through Hole - Compliant Pin

**Electrical**

Current - Maximum per Contact 2.5A, 55.0A  
Grounding to PCB No  
Voltage - Maximum 600V AC / 250V DC

**Material Info**

**Reference - Drawing Numbers**

Application Specification AS-46436-100-001  
Packaging Specification PK-46562-002-000, PK-46562-003-001  
Product Specification PS-46436-100-001  
Sales Drawing SD-46562-1005  
Test Summary 464361000-TS-000

This document was generated on 07/30/2021

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Power to the Board](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[6450171-4](#) [6450552-7](#) [6600323-8](#) [6643429-1](#) [6646040-2](#) [6651939-1](#) [6766604-1](#) [120959-1](#) [1393557-2](#) [1393532-2](#) [1393532-3](#) [1393532-4](#)  
[1393557-1](#) [1600812-5](#) [1-6450861-2](#) [1744132-7](#) [1761122-1](#) [1766250-1](#) [1892109-1](#) [2-6450860-5](#) [2-6450870-0](#) [1-6450161-4](#) [1-6450850-6](#) [1-6450869-6](#) [1645526-2](#) [1-6600130-0](#) [2005243-2](#) [377-0020-11130](#) [TE34-12-16P-F0](#) [5-6450830-6](#) [5646956-4](#) [377-0080-11131A](#) [4-6450830-9](#)  
[4-6600333-3](#) [10125416-4050LF](#) [6600320-3](#) [3-6450860-5](#) [1888123-2](#) [6450166-1](#) [6643978-1](#) [6766605-1](#) [701-15-02109](#) [N11444](#) [6651938-1](#)  
[6450810-7](#) [46437-1112](#) [1-1589677-8](#) [5646956-5](#) [6450813-2](#) [6450129-4](#)