


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0466220202](#)
Status: **Active**
Overview: [Micro-Fit Connector System](#)
Description: Micro-Fit BMI Header, Surface Mount, Single Row, Right-Angle, with Solder Tab, 0.76µm Gold (Au) Selective Plating, 2 Circuits, Tape and Reel

Documents:

3D Model (PDF)	Packaging Specification PK-46622-001-001 (PDF)
3D Model	Symbol Footprint Data SYM-46622-0200-001 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)
Product Specification PS-44300-001-001 (PDF)	Product Literature (PDF)

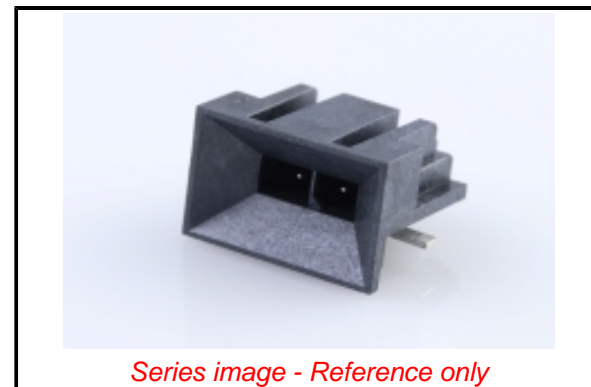

Series image - Reference only

Agency Certification

CSA LR19980

General

Product Family	PCB Headers
Series	46622
Application	Power, Wire-to-Board
Overview	Micro-Fit Connector System
Product Name	Micro-Fit BMI
UPC	887191678122

Physical

Breakaway	No
Circuits (Loaded)	2
Circuits (maximum)	2
Color - Resin	Black
Durability (mating cycles max)	30
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Liquid Crystal Polymer
Net Weight	0.940/g
Number of Rows	1
Orientation	Right Angle
PCB Locator	Yes
PCB Retention	Yes
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	3.00mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Surface Mount

Electrical

Current - Maximum per Contact 8.5A

EU ELV

Not Relevant

EU RoHS

Compliant
REACH SVHC

Not Contained Per -
D(2021)4569-DC (8
July 2021)

Halogen-Free
Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[46622](#) Series

Mates With

[46623](#) Micro-Fit BMI Panel Mount
Receptacle Housing

Voltage - Maximum 600V

Solder Process Data

Duration at Max. Process Temperature (seconds) 030

Lead-free Process Capability REFLOW

Max. Cycles at Max. Process Temperature 003

Process Temperature max. C 260

Material Info

Reference - Drawing Numbers

Packaging Specification PK-46622-001-001

Product Specification PS-44300-001-001

Sales Drawing SD-46622-0000-001

Symbol/Footprint Data SYM-46622-0200-001

This document was generated on 10/06/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[0009485154](#) [0009624107](#) [0009652039](#) [0010894262](#) [00136](#) [0014563224](#) [0015477550](#) [0015917081](#) [00201300061](#) [0022102161](#) [0022173172](#)
[0022173242](#) [0022283030](#) [0026482241](#) [0026604103](#) [0039026044](#) [0039036124](#) [0050291907](#) [0050304461](#) [0050361796](#) [0050650112](#) [005093X](#)
[005758D](#) [005759B](#) [008263021200000+](#) [008263021200001+](#) [008263031200000+](#) [008263041200000+](#) [008263061200000+](#)
[008283021100000+](#) [008283021200000+](#) [008283041200000+](#) [008283061100000+](#) [008283061200000+](#) [008283081200000+](#)
[008283161310000+](#) [008283161400000+](#) [008370127000800](#) [008370151000800+](#) [008370167001800+](#) [008370217000800+](#) [008380026002010](#)
[008380050002010](#) [008383010000010](#) [008426-000](#) [009021041100339](#) [009021061200339](#) [009021101200339](#) [009021121200339](#)
[009021142200339](#)