

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0475901001](#)
Status: **Active**
Overview: [USB Products and Solutions](#)
Description: [Micro-USB AB Receptacle, Right-Angle, Top Mount, Surface Mount, Lead-Free](#)

Documents:

[3D Model](#) [Product Specification PS-47589-001-001 \(PDF\)](#)
[3D Model \(PDF\)](#) [Packaging Specification PK-47589-001-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

UL E107635

General


Product Family I/O Connectors
Series [47590](#)
Application Wire-to-Board
Comments Signal contacts 1.0A, Power contacts 1.8A
Component Type Receptacle
Electrical Model Yes
Overview [USB Products and Solutions](#)
Product Name USB
Standard USB 2.0
Type Micro-AB
UPC 884982783737

Physical

Circuits (Loaded) 5
Circuits (maximum) 5
Color - Resin Gray
Durability (mating cycles max) 10000
Flammability 94V-0
Gender Female
Keying to Mating Part Yes
Lock to Mating Part No
Material - Metal Copper Alloy
Material - Plating Mating Gold
Material - Plating Termination Gold
Material - Resin High Temperature Thermoplastic
Mounting Style Top-Mount
Net Weight 0.263/g
Number of Rows 1
Orientation Right Angle
PCB Retention None
Packaging Type Embossed Tape on Reel
Panel Mount No
Pitch - Mating Interface 0.65mm
Pitch - Termination Interface 0.65mm
Polarized to Mating Part Yes
Ports 1
Surface Mount Compatible (SMC) Yes
Temperature Range - Operating -30° to +85°C
Termination Interface: Style Surface Mount
Waterproof / Dustproof No

Electrical

Current - Maximum per Contact 1.8A, 1.0A

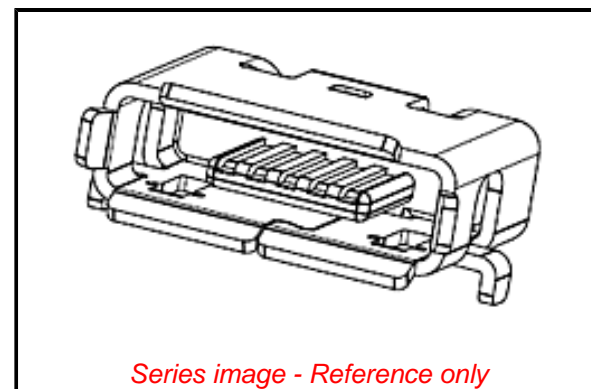

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2020)9139-DC (19
Jan 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[47590 Series](#)

Grounding to Panel	Yes
Shield Type	Full Shield
Shielded	Yes
Voltage - Maximum	30V AC (RMS)

Solder Process Data

Duration at Max. Process Temperature (seconds)	010
Lead-free Process Capability	REFLOW
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	245

Material Info**Reference - Drawing Numbers**

Electrical Model Document	EE-47590-001-001
Packaging Specification	PK-47589-001-001
Product Specification	PS-47589-001-001
S-Parameter Model	SP-47590-001-001
Sales Drawing	SD-47590-101-001

This document was generated on 08/26/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [USB Connectors](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[65-647-8-BK-BU](#) [950](#) [952](#) [E8144-B01021-L](#) [A-USB A-LP-SMT-C](#) [A-USB B-TOP-C](#) [MUSBA511N5](#) [MUSBD11135](#) [217450-1](#) [CA 6 W LD](#)
[KMBVX-TH-5S-B30](#) [896-30-004-00-000000](#) [KUSBVX-BS1N-W30](#) [KUSBX-AP-KIT-SCBLK](#) [KUSBX-AS2N-W](#) [KUSBX-SMT2AP1S-W](#)
[KUSBX-SMT2AP1S-W30](#) [935](#) [957](#) [30-498-6](#) [17-210051](#) [1734082-1](#) [30-1574](#) [30-470](#) [30-489](#) [30-541](#) [30-572-3](#) [MAB 8 SN V](#) [A-USB A-](#)
[2P-C](#) [MIKROE-1451](#) [USBFTV2PEM2G](#) [USBFTVC6ZN](#) [KUSBX-AS2N-W30](#) [KUSBX-SLAS1N-W](#) [KUSBX-SMT-AS1N-W30](#) [4689-1](#) [1-](#)
[1734084-2](#) [E8110-001-01](#) [MUSBA81130](#) [33UBARS1-04SW11](#) [33UBAR-04SW11](#) [USBF21ZNSCC](#) [USBBFTV6ZC](#) [10135326-001LF](#)
[M9177/3-1](#) [USB-A-S-F-B-VT](#) [925](#) [4198](#) [690-024-633-031](#) [KUSBEX-BSFS1N-W](#)