


CKT	DIM. A	DIM. B	SLOT LOC BETWEEN CKTS
2	7.77 .306	3.96±0.05 .156±.002	NONE
3	11.73 .462	7.92±0.08 .312±.003	NONE
4	15.70 .618	11.89±0.08 .468±.003	NONE
5	19.66 .774	15.85±0.10 .624±.004	NONE
6	23.62 .930	19.81±0.10 .780±.004	3 & 4
7	27.58 1.086	23.77±0.10 .936±.004	4 & 5
8	31.55 1.242	27.74±0.13 1.092±.005	4 & 5
9	35.51 1.398	31.70±0.13 1.248±.005	5 & 6
10	39.47 1.554	35.66±0.13 1.404±.005	5 & 6
11	43.43 1.710	39.62±0.15 1.560±.006	6 & 7
12	47.40 1.866	43.59±0.15 1.716±.006	4 & 5 8 & 9
13	51.36 2.022	47.55±0.15 1.872±.006	4 & 5 9 & 10
14	55.32 2.178	51.51±0.18 2.028±.007	5 & 6 9 & 10
15	59.28 2.334	55.47±0.18 2.184±.007	5 & 6 10 & 11
16	63.25 2.490	59.44±0.18 2.340±.007	5 & 6 11 & 12
17	67.21 2.646	63.40±0.20 2.496±.008	6 & 7 11 & 12
18	71.17 2.802	67.36±0.20 2.652±.008	6 & 7 12 & 13

- NOTES:
- MATERIAL: HEADER-GLASS FILLED POLYESTER, 94V-0, MOLDED NATURAL (WHITE).
  - FINISH: (197) OVERALL REFLOWED MATTE TIN: 0.00152/.000060 MIN. OVER 0.00127/.000050 MIN. NICKEL OVERALL.  
(154) OVERALL TIN: .00254/.000100 MIN OVER .00127/.000050 MIN NICKEL.  
(208) SELECT GOLD: .00038/.000015 MIN, SELECT TIN: .00254/.000100 MIN, OVERALL NICKEL UNDERPLATE: .00127/.000050 MIN.  
(228) SELECT GOLD: .00076/.000030 MIN, SELECT TIN: .00254/.000100 MIN, OVERALL NICKEL UNDERPLATE: .00127/.000050 MIN.  
(241) SELECT GOLD: 0.00051/.000020 MIN. SELECT TIN: 0.00254/.000100 MIN. OVERALL NICKEL UNDERPLATE: 0.00127/.000050 MIN.  
FOR ADDITIONAL PLATING INFO, SEE SD-88.
  - PRODUCT SPECIFICATION AND PROCESS PARAMETERS: SEE PS-08-50.
  - PACKAGING INFORMATION: SEE CHART
  - SOLDERABILITY: PER SMES-152.
  - PIN PUSH-OUT FORCE: PRIOR TO SOLDERING, A 3 LB. MINIMUM FORCE (IN EITHER DIRECTION)
  - PARTS ARE STACKABLE END TO END ON 3.96/.156 CENTERS.
  - THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.
  - SLOTS ON BACKWALL ARE BETWEEN CIRCUITS. SEE CHART FOR LOCATION.
  - CIRCUIT 1 DESIGNATION IS USED TO DEFINE VOID LOCATION. CIRCUIT 1 MAY OR MAY NOT LINE UP WITH CIRCUIT 1 ON THE MATING HOUSING.
  - FEATURE MAY BE ON EITHER SIDE OF THE PART

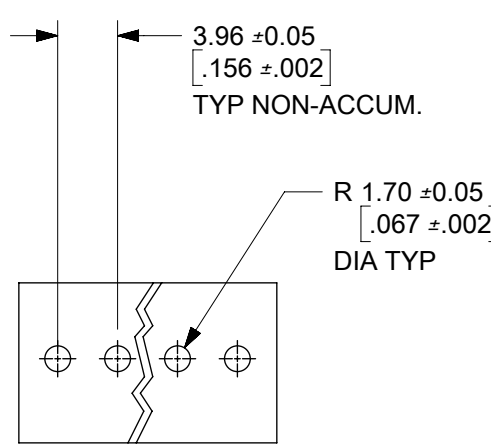

PCB LAYOUT: COMPONENT SIDE

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

DIMENSION UNITS <b>MM/IN</b>	SCALE <b>2:1</b>	CURRENT REV DESC: OBSOLETE PART NUMBER	<b>molex</b>		
GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 650267			
4 PLACES ±	±	DRWN: SKANDB	PRODUCT CUSTOMER DRAWING		
3 PLACES ±	± 0.01	CHK'D: GGA	DOCUMENT NUMBER	DOC TYPE	DOC PART
2 PLACES ±	± 0.25	APPR: GGA	SDA-41792	PSD	000
1 PLACE ±	± 0.38	INITIAL REVISION:	REVISION	L1	
0 PLACES ±	±	DRWN: JSCHAFFER	11-07-03		
ANGULAR TOL	± 0.5°	APPR: MARGULIS	11-17-03		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER
		B-SIZE	41792	SEE TABLE	GENERAL MARKET
					SHEET NUMBER 1 OF 8

	10	9	8	7	6	5	4	3	2	1																																																																																																		
	41792																																																																																																											
E	F	OPTIONS	Group	A-41792-0002/0018	Group	A-41792-0511/0527	Group	A-41792-0528/0544	Group	A-41792-0562/0578																																																																																																		
			Header No:	41790-0002/0018	Header No:	41790-0002/0018	Header No:	41790-0002/0018	Header No:	41790-0002/0018																																																																																																		
			Pin No:	43294-0572	Pin No:	43294-0569	Pin No:	43294-0570	Pin No:	43294-0570																																																																																																		
			Plating:	197 – TIN	Plating:	208 – 15 GOLD	Plating:	228 – 30 GOLD	Plating:	228 – 30 GOLD																																																																																																		
			Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100																																																																																																		
			Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450																																																																																																		
			Gold Loc G	N/A	Gold Loc G	6.86/ .270	Gold Loc G	6.86/ .270	Gold Loc G	6.86/ .270																																																																																																		
			Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213																																																																																																		
			PC Tail P	3.96/ .156	PC Tail P	3.96/ .156	PC Tail P	3.96/ .156	PC Tail P	3.96/ .156																																																																																																		
			Tin Loc T	OVERALL	Tin Loc T	5.08/ .200	Tin Loc T	5.08/ .200	Tin Loc T	5.08/ .200																																																																																																		
			Voided Ckts	NONE	Voided Ckts	NONE	Voided Ckts	NONE	Voided Ckts	2																																																																																																		
			Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002																																																																																																		
Ckts	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number																																																																																																				
2	26-60-5020	A-41792-0002	41792-0511	A-41792-0511	41792-0528	A-41792-0528	41792-0562	A-41792-0562																																																																																																				
3	26-60-5030	A-41792-0003	41792-0512	A-41792-0512	41792-0529	A-41792-0529	41792-0563	A-41792-0563																																																																																																				
4	26-60-5040	A-41792-0004	41792-0513	A-41792-0513	41792-0530	A-41792-0530	41792-0564	A-41792-0564																																																																																																				
5	26-60-5050	A-41792-0005	41792-0514	A-41792-0514	41792-0531	A-41792-0531	41792-0565	A-41792-0565																																																																																																				
6	26-60-5060	A-41792-0006	41792-0515	A-41792-0515	41792-0532	A-41792-0532	41792-0566	A-41792-0566																																																																																																				
7	26-60-5070	A-41792-0007	41792-0516	A-41792-0516	41792-0533	A-41792-0533	41792-0567	A-41792-0567																																																																																																				
8	26-60-5080	A-41792-0008	41792-0517	A-41792-0517	41792-0534	A-41792-0534	41792-0568	A-41792-0568																																																																																																				
9	26-60-5090	A-41792-0009	41792-0518	A-41792-0518	41792-0535	A-41792-0535	41792-0569	A-41792-0569																																																																																																				
10	26-60-5100	A-41792-0010	41792-0519	A-41792-0519	41792-0536	A-41792-0536	41792-0570	A-41792-0570																																																																																																				
11	26-60-5110	A-41792-0011	41792-0520	A-41792-0520	41792-0537	A-41792-0537	41792-0571	A-41792-0571																																																																																																				
12	26-60-5120	A-41792-0012	41792-0521	A-41792-0521	41792-0538	A-41792-0538	41792-0572	A-41792-0572																																																																																																				
13	26-60-5130	A-41792-0013	41792-0522	A-41792-0522	41792-0539	A-41792-0539	41792-0573	A-41792-0573																																																																																																				
14	26-60-5140	A-41792-0014	41792-0523	A-41792-0523	41792-0540	A-41792-0540	41792-0574	A-41792-0574																																																																																																				
15	26-60-5150	A-41792-0015	41792-0524	A-41792-0524	41792-0541	A-41792-0541	41792-0575	A-41792-0575																																																																																																				
16	26-60-5160	A-41792-0016	41792-0525	A-41792-0525	41792-0542	A-41792-0542	41792-0576	A-41792-0576																																																																																																				
17	26-60-5170	A-41792-0017	41792-0526	A-41792-0526	41792-0543	A-41792-0543	41792-0577	A-41792-0577																																																																																																				
18	26-60-5180	A-41792-0018	41792-0527	A-41792-0527	41792-0544	A-41792-0544	41792-0578	A-41792-0578																																																																																																				
	<table border="1"> <tr> <td colspan="10">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td> </tr> <tr> <td colspan="2">DIMENSION UNITS</td> <td colspan="2">SCALE</td> <td colspan="6">CURRENT REV DESC: OBSOLETE PART NUMBER</td> </tr> <tr> <td colspan="2">MM/IN</td> <td colspan="2">1:1</td> <td colspan="6" rowspan="5"> <div style="text-align: center; font-weight: bold; font-size: 24px;">molex</div> <p>KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS</p> <p>PRODUCT CUSTOMER DRAWING</p> </td> </tr> <tr> <td colspan="4">GENERAL TOLERANCES (UNLESS SPECIFIED)</td> </tr> <tr> <td></td> <td>MM</td> <td colspan="2">INCH</td> </tr> <tr> <td>4 PLACES</td> <td>±</td> <td></td> <td>±</td> </tr> <tr> <td>3 PLACES</td> <td>±</td> <td></td> <td>± 0.01</td> </tr> <tr> <td>2 PLACES</td> <td>±</td> <td>0.25</td> <td>± 0.015</td> </tr> <tr> <td>1 PLACE</td> <td>±</td> <td>0.38</td> <td>±</td> </tr> <tr> <td>0 PLACES</td> <td>±</td> <td></td> <td>±</td> </tr> <tr> <td colspan="4">ANGULAR TOL ± 0.5°</td> <td colspan="2">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td> <td colspan="2">THIRD ANGLE PROJECTION</td> <td colspan="2">DRAWING SERIES</td> </tr> <tr> <td colspan="4"></td> <td colspan="2">B-SIZE</td> <td colspan="2">41792</td> <td colspan="2">MATERIAL NUMBER CUSTOMER</td> </tr> <tr> <td colspan="4"></td> <td colspan="2">SEE TABLE</td> <td colspan="2">GENERAL MARKET</td> <td colspan="2">SHEET NUMBER</td> </tr> <tr> <td colspan="4"></td> <td colspan="2"></td> <td colspan="2">2 OF 8</td> <td colspan="2"></td> </tr> </table>										THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER						MM/IN		1:1		<div style="text-align: center; font-weight: bold; font-size: 24px;">molex</div> <p>KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS</p> <p>PRODUCT CUSTOMER DRAWING</p>						GENERAL TOLERANCES (UNLESS SPECIFIED)					MM	INCH		4 PLACES	±		±	3 PLACES	±		± 0.01	2 PLACES	±	0.25	± 0.015	1 PLACE	±	0.38	±	0 PLACES	±		±	ANGULAR TOL ± 0.5°				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING SERIES						B-SIZE		41792		MATERIAL NUMBER CUSTOMER						SEE TABLE		GENERAL MARKET		SHEET NUMBER								2 OF 8			
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																																																																																												
DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER																																																																																																								
MM/IN		1:1		<div style="text-align: center; font-weight: bold; font-size: 24px;">molex</div> <p>KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS</p> <p>PRODUCT CUSTOMER DRAWING</p>																																																																																																								
GENERAL TOLERANCES (UNLESS SPECIFIED)																																																																																																												
	MM	INCH																																																																																																										
4 PLACES	±		±																																																																																																									
3 PLACES	±		± 0.01																																																																																																									
2 PLACES	±	0.25	± 0.015																																																																																																									
1 PLACE	±	0.38	±																																																																																																									
0 PLACES	±		±																																																																																																									
ANGULAR TOL ± 0.5°				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING SERIES																																																																																																				
				B-SIZE		41792		MATERIAL NUMBER CUSTOMER																																																																																																				
				SEE TABLE		GENERAL MARKET		SHEET NUMBER																																																																																																				
						2 OF 8																																																																																																						
	DOCUMENT STATUS	P1	RELEASE DATE	2020/12/10	08:28:35																																																																																																							
		9	8	7	6	5	4	3	2	1																																																																																																		

	10	9	8	7	6	5	4	3	2	1	
	41792										
E	OPTIONS	Group	A-41792-0019/0035	Group	A-41792-0036/0050	Group	A-41792-0051/0067	Group			
		Header No:	41790-0002/0018	Header No:	41790-0004/0018	Header No:	41790-0002/0018	Header No:			
		Pin No:	43294-0573	Pin No:	43294-0572	Pin No:	43294-0643	Pin No:			
		Plating:	241 - GOLD	Plating:	197 - TIN	Plating:	197 - TIN	Plating:			
		Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	29.97 / 1.180	Pin Length L			
		Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	13.41 / .528	Mating M			
		Gold Loc G	6.86/ .270	Gold Loc G	N/A	Gold Loc G	N/A	Gold Loc G			
		Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y			
		PC Tail P	3.96/ .156	PC Tail P	3.96/ .156	PC Tail P	4.01 / .158	PC Tail P			
		Tin Loc T	5.08/ .200	Tin Loc T	OVERALL	Tin Loc T	OVERALL	Tin Loc T			
		Voided Ckts	NONE	Voided Ckts	4	Voided Ckts	NONE	Voided Ckts			
		Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per			
Ckts	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number			
2	26-61-5020	A-41792-0019									
3	26-61-5030	A-41792-0020									
4	26-61-5040	A-41792-0021	26-61-5043	A-41792-0036							
5	26-61-5050	A-41792-0022	26-61-5053	A-41792-0037							
6	26-61-5060	A-41792-0023	26-61-5063	A-41792-0038							
7	26-61-5070	A-41792-0024	26-61-5073	A-41792-0039							
8	26-61-5080	A-41792-0025	26-61-5083	A-41792-0040							
9	26-61-5090	A-41792-0026	26-61-5093	A-41792-0041							
10	26-61-5100	A-41792-0027	26-61-5103	A-41792-0042							
11	26-61-5110	A-41792-0028	26-61-5113	A-41792-0043							
12	26-61-5120	A-41792-0029	26-61-5123	A-41792-0044							
13	26-61-5130	A-41792-0030	26-61-5133	A-41792-0045							
14	26-61-5140	A-41792-0031	26-61-5143	A-41792-0046							
15	26-61-5150	A-41792-0032	26-61-5153	A-41792-0047							
16	26-61-5160	A-41792-0033	26-61-5163	A-41792-0048							
17	26-61-5170	A-41792-0034	26-61-5173	A-41792-0049							
18	26-61-5180	A-41792-0035	26-61-5183	A-41792-0050							
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER		<b>molex</b>			
MM/IN		1:1									
GENERAL TOLERANCES (UNLESS SPECIFIED)		MM		INCH		EC NO: 650267		KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS			
4 PLACES ±		±		±		DRWN: SKANDB 2020/10/27					
3 PLACES ±		± 0.01		±		CHK'D: GGA 2020/12/10					
2 PLACES ± 0.25		± 0.015		±		APPR: GGA 2020/12/10					
1 PLACE ± 0.38		±		±		INITIAL REVISION:					
0 PLACES ±		±		±		DRWN: JSCHAFFER 11-07-03					
ANGULAR TOL ± 0.5°		±		±		APPR: MARGULIS 11-17-03					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		DOCUMENT NUMBER		DOC TYPE   DOC PART   REVISION	
				B-SIZE		41792		SDA-41792		PSD   000   L1	
								MATERIAL NUMBER		CUSTOMER	
								SEE TABLE		GENERAL MARKET	
										SHEET NUMBER	
										3 OF 8	
DOCUMENT STATUS		P1	RELEASE DATE	2020/12/10	08:28:35						
		9	8	7	6	5	4	3	2	1	

10		9		8		7		6		5		4		3		2		1																																																																																																																																											
<b>41792</b>																																																																																																																																																													
<b>OPTIONS</b>	Group	A-41792-0198/0213		Group	A-41792-0214/0227		Group	A-41792-0242/0257		Group	A-41792-0341/0352																																																																																																																																																		
	Header No:	41790-0002/0018		Header No:	41790-0005/0018		Header No:	41790-0003/0018		Header No:	41790-0007/0018																																																																																																																																																		
	Pin No:	43294-0572		Pin No:	43294-0572		Pin No:	43294-0572		Pin No:	43294-0572																																																																																																																																																		
	Plating:	197 - TIN		Plating:	197 - TIN		Plating:	197 - TIN		Plating:	197 - TIN																																																																																																																																																		
	Pin Length L	27.94/ 1.100		Pin Length L	27.94/ 1.100		Pin Length L	27.94/ 1.100		Pin Length L	27.94/ 1.100																																																																																																																																																		
	Mating M	11.43 / .450		Mating M	11.43 / .450		Mating M	11.43 / .450		Mating M	11.43 / .450																																																																																																																																																		
	Gold Loc G	N/A		Gold Loc G	N/A		Gold Loc G	N/A		Gold Loc G	N/A																																																																																																																																																		
	Height Y	5.41 / .213		Height Y	5.41 / .213		Height Y	5.41 / .213		Height Y	5.41 / .213																																																																																																																																																		
	PC Tail P	3.96 / .156		PC Tail P	3.96 / .156		PC Tail P	3.96 / .156		PC Tail P	3.96 / .156																																																																																																																																																		
	Tin Loc T	OVERALL		Tin Loc T	OVERALL		Tin Loc T	OVERALL		Tin Loc T	OVERALL																																																																																																																																																		
	Voided Ckts	2		Voided Ckts	5		Voided Ckts	3		Voided Ckts	7																																																																																																																																																		
	Pack Per	PK-41792-002		Pack Per	PK-41792-002		Pack Per	PK-41792-002		Pack Per	PK-41792-002																																																																																																																																																		
	Ckts	Material No	Engineer Number		Material No	Engineer Number		Material No	Engineer Number		Material No	Engineer Number																																																																																																																																																	
2																																																																																																																																																													
3	26-62-5031	A-41792-0198					26-62-5035	A-41792-0242																																																																																																																																																					
4	26-62-5041	A-41792-0199					26-62-5045	A-41792-0243																																																																																																																																																					
5	26-62-5051	A-41792-0200		41792-0214	A-41792-0214		26-62-5055	A-41792-0244																																																																																																																																																					
6	26-62-5061	A-41792-0201		26-62-5060	A-41792-0215		26-62-5065	A-41792-0245																																																																																																																																																					
7	26-62-5071	A-41792-0202		41792-0216	A-41792-0216		26-62-5075	A-41792-0246		41792-0341	A-41792-0341																																																																																																																																																		
8	26-62-5081	A-41792-0203		41792-0217	A-41792-0217		26-62-5085	A-41792-0247		41792-0342	A-41792-0342																																																																																																																																																		
9	26-62-5091	A-41792-0204		41792-0218	A-41792-0218		26-62-5095	A-41792-0248		41792-0343	A-41792-0343																																																																																																																																																		
10	26-62-5101	A-41792-0205		26-62-5100	A-41792-0219		26-62-5105	A-41792-0249		26-62-5104	A-41792-0344																																																																																																																																																		
11	26-62-5111	A-41792-0206		41792-0220	A-41792-0220		26-62-5115	A-41792-0250		26-62-5114	A-41792-0345																																																																																																																																																		
12	26-62-5121	A-41792-0207		41792-0221	A-41792-0221		26-62-5125	A-41792-0251		41792-0346	A-41792-0346																																																																																																																																																		
13				41792-0222	A-41792-0222		26-62-5135	A-41792-0252		41792-0347	A-41792-0347																																																																																																																																																		
14	26-62-5141	A-41792-0209		41792-0223	A-41792-0223		26-62-5145	A-41792-0253		41792-0348	A-41792-0348																																																																																																																																																		
15	26-62-5151	A-41792-0210		41792-0224	A-41792-0224		26-62-5155	A-41792-0254		41792-0349	A-41792-0349																																																																																																																																																		
16	26-62-5161	A-41792-0211		41792-0225	A-41792-0225		26-62-5165	A-41792-0255		41792-0350	A-41792-0350																																																																																																																																																		
17	26-62-5171	A-41792-0212		41792-0226	A-41792-0226		26-62-5175	A-41792-0256		41792-0351	A-41792-0351																																																																																																																																																		
18	26-62-5181	A-41792-0213		41792-0227	A-41792-0227		26-62-5185	A-41792-0257		41792-0352	A-41792-0352																																																																																																																																																		
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="18" style="text-align: center; font-size: 8px;">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td> </tr> <tr> <td colspan="2">DIMENSION UNITS</td> <td colspan="2">SCALE</td> <td colspan="14">CURRENT REV DESC: OBSOLETE PART NUMBER</td> </tr> <tr> <td colspan="2">MM/IN</td> <td colspan="2">1:1</td> <td colspan="14" rowspan="5" style="text-align: center; vertical-align: middle;"> <p style="margin: 5px 0;">KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS</p> <p style="margin: 5px 0;">PRODUCT CUSTOMER DRAWING</p> <p style="margin: 5px 0;">EC NO: 650267 DRWN: SKANDB 2020/10/27 CHK'D: GGA 2020/12/10 APPR: GGA 2020/12/10</p> <p style="margin: 5px 0;">INITIAL REVISION: DRWN: JSCHAFFER 11-07-03 APPR: MARGULIS 11-17-03</p> <p style="margin: 5px 0;">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</p> </td> </tr> <tr> <td colspan="4">GENERAL TOLERANCES (UNLESS SPECIFIED)</td> </tr> <tr> <td></td> <td>MM</td> <td>INCH</td> <td></td> </tr> <tr> <td>4 PLACES</td> <td>±</td> <td></td> <td>±</td> </tr> <tr> <td>3 PLACES</td> <td>±</td> <td>0.01</td> <td>±</td> </tr> <tr> <td>2 PLACES</td> <td>±</td> <td>0.25</td> <td>± 0.015</td> </tr> <tr> <td>1 PLACE</td> <td>±</td> <td>0.38</td> <td>±</td> </tr> <tr> <td>0 PLACES</td> <td>±</td> <td></td> <td>±</td> </tr> <tr> <td colspan="4">ANGULAR TOL ± 0.5°</td> </tr> <tr> <td colspan="2">THIRD ANGLE PROJECTION</td> <td colspan="2">DRAWING</td> <td colspan="2">SERIES</td> <td colspan="2">MATERIAL NUMBER</td> <td colspan="2">CUSTOMER</td> <td colspan="2">DOCUMENT NUMBER</td> <td colspan="2">DOC TYPE</td> <td colspan="2">DOC PART</td> <td colspan="2">REVISION</td> </tr> <tr> <td colspan="2" style="text-align: center;"></td> <td colspan="2">B-SIZE</td> <td colspan="2">41792</td> <td colspan="2">SEE TABLE</td> <td colspan="2">GENERAL MARKET</td> <td colspan="2">SDA-41792</td> <td colspan="2">PSD</td> <td colspan="2">000</td> <td colspan="2">L1</td> </tr> <tr> <td colspan="2">DOCUMENT STATUS</td> <td colspan="2">P1</td> <td colspan="2">RELEASE DATE</td> <td colspan="2">2020/12/10 08:28:35</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> </tr> </table>																		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																		DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER														MM/IN		1:1		<p style="margin: 5px 0;">KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS</p> <p style="margin: 5px 0;">PRODUCT CUSTOMER DRAWING</p> <p style="margin: 5px 0;">EC NO: 650267 DRWN: SKANDB 2020/10/27 CHK'D: GGA 2020/12/10 APPR: GGA 2020/12/10</p> <p style="margin: 5px 0;">INITIAL REVISION: DRWN: JSCHAFFER 11-07-03 APPR: MARGULIS 11-17-03</p> <p style="margin: 5px 0;">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</p>														GENERAL TOLERANCES (UNLESS SPECIFIED)					MM	INCH		4 PLACES	±		±	3 PLACES	±	0.01	±	2 PLACES	±	0.25	± 0.015	1 PLACE	±	0.38	±	0 PLACES	±		±	ANGULAR TOL ± 0.5°				THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION				B-SIZE		41792		SEE TABLE		GENERAL MARKET		SDA-41792		PSD		000		L1		DOCUMENT STATUS		P1		RELEASE DATE		2020/12/10 08:28:35											
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																																																																																																																																													
DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER																																																																																																																																																									
MM/IN		1:1		<p style="margin: 5px 0;">KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS</p> <p style="margin: 5px 0;">PRODUCT CUSTOMER DRAWING</p> <p style="margin: 5px 0;">EC NO: 650267 DRWN: SKANDB 2020/10/27 CHK'D: GGA 2020/12/10 APPR: GGA 2020/12/10</p> <p style="margin: 5px 0;">INITIAL REVISION: DRWN: JSCHAFFER 11-07-03 APPR: MARGULIS 11-17-03</p> <p style="margin: 5px 0;">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</p>																																																																																																																																																									
GENERAL TOLERANCES (UNLESS SPECIFIED)																																																																																																																																																													
	MM	INCH																																																																																																																																																											
4 PLACES	±		±																																																																																																																																																										
3 PLACES	±	0.01	±																																																																																																																																																										
2 PLACES	±	0.25	± 0.015																																																																																																																																																										
1 PLACE	±	0.38	±																																																																																																																																																										
0 PLACES	±		±																																																																																																																																																										
ANGULAR TOL ± 0.5°																																																																																																																																																													
THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION																																																																																																																																													
		B-SIZE		41792		SEE TABLE		GENERAL MARKET		SDA-41792		PSD		000		L1																																																																																																																																													
DOCUMENT STATUS		P1		RELEASE DATE		2020/12/10 08:28:35																																																																																																																																																							
9		8		7		6		5		4		3		2		1																																																																																																																																													

10	9	8	7	6	5	4	3	2	1																																																																														
41792																																																																																							
E	OPTIONS	Group	A-41792-0460/0471	Group	A-41792-0472/0483	Group	A-41792-0484/0493	Group	A-41792-0579/0595																																																																														
		Header No:	41790-0007/0018	Header No:	41790-0007/0018	Header No:	41790-0009/0018	Header No:	41790-0002/0018																																																																														
		Pin No:	43294-0572	Pin No:	43294-0572	Pin No:	43294-0572	Pin No:	43294-0571																																																																														
		Plating:	197 - TIN	Plating:	197 - TIN	Plating:	197 - TIN	Plating:	154 - TIN																																																																														
		Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100																																																																														
		Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450																																																																														
		Gold Loc G	N/A	Gold Loc G	N/A	Gold Loc G	N/A	Gold Loc G	N/A																																																																														
		Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213																																																																														
		PC Tail P	3.96 / .156	PC Tail P	3.96 / .156	PC Tail P	3.96 / .156	PC Tail P	3.96 / .156																																																																														
		Tin Loc T	OVERALL	Tin Loc T	OVERALL	Tin Loc T	OVERALL	Tin Loc T	OVERALL																																																																														
		Voided Ckts	2, 7	Voided Ckts	4, 7	Voided Ckts	2, 5, 9	Voided Ckts	NONE																																																																														
		Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002																																																																														
Ckts	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number																																																																															
2							50-29-1904	A-41792-0579																																																																															
3							50-29-1905	A-41792-0580																																																																															
4							50-29-1906	A-41792-0581																																																																															
5							50-29-1907	A-41792-0582																																																																															
6							50-29-1908	A-41792-0583																																																																															
7	41792-0460	A-41792-0460		A-41792-0472			50-29-1909	A-41792-0584																																																																															
8	41792-0461	A-41792-0461	26-60-5087	A-41792-0473			50-29-1910	A-41792-0585																																																																															
9				A-41792-0474		A-41792-0484	50-29-1911	A-41792-0586																																																																															
10	41792-0463	A-41792-0463		A-41792-0475		A-41792-0485	50-29-1912	A-41792-0587																																																																															
11	41792-0464	A-41792-0464		A-41792-0476		A-41792-0486	50-29-1913	A-41792-0588																																																																															
12	41792-0465	A-41792-0465		A-41792-0477	26-60-5128	A-41792-0487	50-29-1914	A-41792-0589																																																																															
13	41792-0466	A-41792-0466		A-41792-0478		A-41792-0488	50-29-1915	A-41792-0590																																																																															
14	41792-0467	A-41792-0467		A-41792-0479		A-41792-0489	50-29-1916	A-41792-0591																																																																															
15	41792-0468	A-41792-0468		A-41792-0480		A-41792-0490	50-29-1917	A-41792-0592																																																																															
16	41792-0469	A-41792-0469		A-41792-0481		A-41792-0491	50-29-1918	A-41792-0593																																																																															
17	41792-0470	A-41792-0470		A-41792-0482		A-41792-0492	50-29-1919	A-41792-0594																																																																															
18	41792-0471	A-41792-0471		A-41792-0483		A-41792-0493	50-29-1920	A-41792-0595																																																																															
<table border="1"> <tr> <td colspan="10">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td> </tr> <tr> <td colspan="2">DIMENSION UNITS</td> <td colspan="2">SCALE</td> <td colspan="6">CURRENT REV DESC: OBSOLETE PART NUMBER</td> </tr> <tr> <td colspan="2">MM/IN</td> <td colspan="2">1:1</td> <td colspan="6" rowspan="5">              KK .156 HEADER ASSEMBLY            FRICTION LOCK RIGHT ANGLE W/O PEGS         </td> </tr> <tr> <td colspan="4">GENERAL TOLERANCES (UNLESS SPECIFIED)</td> </tr> <tr> <td></td> <td>MM</td> <td>INCH</td> <td></td> </tr> <tr> <td>4 PLACES</td> <td>±</td> <td>±</td> <td></td> </tr> <tr> <td>3 PLACES</td> <td>±</td> <td>±</td> <td>0.01</td> </tr> <tr> <td>2 PLACES</td> <td>±</td> <td>±</td> <td>0.25 0.015</td> </tr> <tr> <td>1 PLACE</td> <td>±</td> <td>±</td> <td>0.38</td> </tr> <tr> <td>0 PLACES</td> <td>±</td> <td>±</td> <td></td> </tr> <tr> <td colspan="4">ANGULAR TOL ± 0.5°</td> <td colspan="2">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td> <td colspan="2">THIRD ANGLE PROJECTION</td> <td colspan="2">DRAWING SERIES</td> </tr> <tr> <td colspan="2">DOCUMENT STATUS</td> <td>P1</td> <td>RELEASE DATE</td> <td>2020/12/10</td> <td>08:28:35</td> <td colspan="2">B-SIZE</td> <td>41792</td> <td>SEE TABLE</td> </tr> </table>										THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER						MM/IN		1:1		 KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS						GENERAL TOLERANCES (UNLESS SPECIFIED)					MM	INCH		4 PLACES	±	±		3 PLACES	±	±	0.01	2 PLACES	±	±	0.25 0.015	1 PLACE	±	±	0.38	0 PLACES	±	±		ANGULAR TOL ± 0.5°				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING SERIES		DOCUMENT STATUS		P1	RELEASE DATE	2020/12/10	08:28:35	B-SIZE		41792	SEE TABLE
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																																																																							
DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER																																																																																			
MM/IN		1:1		 KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS																																																																																			
GENERAL TOLERANCES (UNLESS SPECIFIED)																																																																																							
	MM	INCH																																																																																					
4 PLACES	±	±																																																																																					
3 PLACES	±	±	0.01																																																																																				
2 PLACES	±	±	0.25 0.015																																																																																				
1 PLACE	±	±	0.38																																																																																				
0 PLACES	±	±																																																																																					
ANGULAR TOL ± 0.5°				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING SERIES																																																																															
DOCUMENT STATUS		P1	RELEASE DATE	2020/12/10	08:28:35	B-SIZE		41792	SEE TABLE																																																																														
<table border="1"> <tr> <td colspan="2">DOCUMENT NUMBER</td> <td>DOC TYPE</td> <td>DOC PART</td> <td>REVISION</td> </tr> <tr> <td colspan="2">SDA-41792</td> <td>PSD</td> <td>000</td> <td>L1</td> </tr> <tr> <td colspan="2">MATERIAL NUMBER</td> <td colspan="2">CUSTOMER</td> <td>SHEET NUMBER</td> </tr> <tr> <td colspan="2">SEE TABLE</td> <td colspan="2">GENERAL MARKET</td> <td>5 OF 8</td> </tr> </table>										DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION	SDA-41792		PSD	000	L1	MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	SEE TABLE		GENERAL MARKET		5 OF 8																																																										
DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION																																																																																			
SDA-41792		PSD	000	L1																																																																																			
MATERIAL NUMBER		CUSTOMER		SHEET NUMBER																																																																																			
SEE TABLE		GENERAL MARKET		5 OF 8																																																																																			
9	8	7	6	5	4	3	2	1																																																																															

10	9	8	7	6	5	4	3	2	1																																																																																								
41792																																																																																																	
F	E	D	C	B	A	OPTIONS	Group	A-41792-0596/0612	Group	A-41792-0613/0629	Group	A-41792-0484/0493	Group	A-41792-0653																																																																																			
							Header No:	41790-0007/0018	Header No:	41790-0009/0018	Header No:	41790-0009/0018	Header No:	41790-0005/0018																																																																																			
							Pin No:	43294-0571	Pin No:	43294-0571	Pin No:	43294-0571	Pin No:	43294-0570																																																																																			
							Plating:	154 - TIN	Plating:	154 - TIN	Plating:	154 - TIN	Plating:	228 - 30 GOLD																																																																																			
							Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100																																																																																			
							Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450																																																																																			
							Gold Loc G	N/A	Gold Loc G	N/A	Gold Loc G	N/A	Gold Loc G	6.86/ .270																																																																																			
							Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213																																																																																			
							PC Tail P	3.96 / .156	PC Tail P	3.96 / .156	PC Tail P	3.96 / .156	PC Tail P	3.96/ .156																																																																																			
							Tin Loc T	OVERALL	Tin Loc T	OVERALL	Tin Loc T	OVERALL	Tin Loc T	5.08/ .200																																																																																			
							Voided Ckts	2, 7	Voided Ckts	2, 5, 9	Voided Ckts	2, 5, 9	Voided Ckts	2, 5																																																																																			
							Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002																																																																																			
							Ckts	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number																																																																																		
							2																																																																																										
							3																																																																																										
							4																																																																																										
							5																																																																																										
							6							41792-0653	A-41792-0653																																																																																		
7	50-29-1926	A-41792-0601																																																																																															
8	50-29-1927	A-41792-0602																																																																																															
9	50-29-1928	A-41792-0603	50-29-1945	A-41792-0620		A-41792-0630																																																																																											
10	50-29-1929	A-41792-0604	50-29-1946	A-41792-0621		A-41792-0631																																																																																											
11	50-29-1930	A-41792-0605	50-29-1947	A-41792-0622		A-41792-0632																																																																																											
12	50-29-1931	A-41792-0606	50-29-1948	A-41792-0623	41792-0633	A-41792-0633																																																																																											
13	50-29-1932	A-41792-0607	50-29-1949	A-41792-0624		A-41792-0634																																																																																											
14	50-29-1933	A-41792-0608	50-29-1950	A-41792-0625		A-41792-0635																																																																																											
15	50-29-1934	A-41792-0609	50-29-1951	A-41792-0626		A-41792-0636																																																																																											
16	50-29-1935	A-41792-0610	50-29-1952	A-41792-0627		A-41792-0637																																																																																											
17	50-29-1936	A-41792-0611	50-29-1953	A-41792-0628		A-41792-0638																																																																																											
18	50-29-1937	A-41792-0612	50-29-1954	A-41792-0629		A-41792-0639																																																																																											
<table border="1"> <tr> <td colspan="10">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td> </tr> <tr> <td colspan="2">DIMENSION UNITS</td> <td colspan="2">SCALE</td> <td colspan="6">CURRENT REV DESC: OBSOLETE PART NUMBER</td> </tr> <tr> <td colspan="2">MM/IN</td> <td colspan="2">1:1</td> <td colspan="6" rowspan="5">              KK .156 HEADER ASSEMBLY            FRICTION LOCK RIGHT ANGLE W/O PEGS         </td> </tr> <tr> <td colspan="4">GENERAL TOLERANCES (UNLESS SPECIFIED)</td> </tr> <tr> <td></td> <td>MM</td> <td>INCH</td> <td></td> </tr> <tr> <td>4 PLACES</td> <td>±</td> <td></td> <td>±</td> </tr> <tr> <td>3 PLACES</td> <td>±</td> <td></td> <td>± 0.01</td> </tr> <tr> <td>2 PLACES</td> <td>± 0.25</td> <td></td> <td>± 0.015</td> </tr> <tr> <td>1 PLACE</td> <td>± 0.38</td> <td></td> <td>±</td> </tr> <tr> <td>0 PLACES</td> <td>±</td> <td></td> <td>±</td> </tr> <tr> <td colspan="4">ANGULAR TOL ± 0.5°</td> <td colspan="2">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td> <td colspan="2">THIRD ANGLE PROJECTION</td> <td colspan="2">DRAWING SERIES</td> </tr> <tr> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2">B-SIZE</td> <td colspan="2">41792</td> <td colspan="2">MATERIAL NUMBER CUSTOMER SHEET NUMBER</td> </tr> <tr> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2">SEE TABLE GENERAL MARKET 6 OF 8</td> </tr> </table>										THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER						MM/IN		1:1		 KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS						GENERAL TOLERANCES (UNLESS SPECIFIED)					MM	INCH		4 PLACES	±		±	3 PLACES	±		± 0.01	2 PLACES	± 0.25		± 0.015	1 PLACE	± 0.38		±	0 PLACES	±		±	ANGULAR TOL ± 0.5°				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING SERIES						B-SIZE		41792		MATERIAL NUMBER CUSTOMER SHEET NUMBER										SEE TABLE GENERAL MARKET 6 OF 8	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																																																																																	
DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER																																																																																													
MM/IN		1:1		 KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS																																																																																													
GENERAL TOLERANCES (UNLESS SPECIFIED)																																																																																																	
	MM	INCH																																																																																															
4 PLACES	±		±																																																																																														
3 PLACES	±		± 0.01																																																																																														
2 PLACES	± 0.25		± 0.015																																																																																														
1 PLACE	± 0.38		±																																																																																														
0 PLACES	±		±																																																																																														
ANGULAR TOL ± 0.5°				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING SERIES																																																																																									
				B-SIZE		41792		MATERIAL NUMBER CUSTOMER SHEET NUMBER																																																																																									
								SEE TABLE GENERAL MARKET 6 OF 8																																																																																									
<table border="1"> <tr> <td>DOCUMENT STATUS</td> <td>P1</td> <td>RELEASE DATE</td> <td>2020/12/10</td> <td>08:28:35</td> <td colspan="5"></td> </tr> </table>										DOCUMENT STATUS	P1	RELEASE DATE	2020/12/10	08:28:35																																																																																			
DOCUMENT STATUS	P1	RELEASE DATE	2020/12/10	08:28:35																																																																																													

	10	9	8	7	6	5	4	3	2	1																																																																																					
	41792																																																																																														
E	F	OPTIONS	Group	A-41792-0667	Group	A-41792-0677	Group	A-41792-0690	Group	A-41792-0698																																																																																					
			Header No:	41790-0009/0018	Header No:	41790-0011/0018	Header No:	41790-0006/0018	Header No:	41790-0013/0018																																																																																					
			Pin No:	43294-0570	Pin No:	43294-0570	Pin No:	43294-0570	Pin No:	43294-0572																																																																																					
			Plating:	228 - 30 GOLD	Plating:	228 - 30 GOLD	Plating:	228 - 30 GOLD	Plating:	197 - TIN																																																																																					
			Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100	Pin Length L	27.94 / 1.100																																																																																					
			Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450	Mating M	11.43 / .450																																																																																					
			Gold Loc G	6.86/ .270	Gold Loc G	6.86/ .270	Gold Loc G	6.86/ .270	Gold Loc G	N/A																																																																																					
			Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213	Height Y	5.41 / .213																																																																																					
			PC Tail P	3.96/ .156	PC Tail P	3.96/ .156	PC Tail P	3.96/ .156	PC Tail P	3.96/ .156																																																																																					
			Tin Loc T	5.08/ .200	Tin Loc T	5.08/ .200	Tin Loc T	5.08/ .200	Tin Loc T	OVERALL																																																																																					
			Voided Ckts	2, 3, 5, 6, 8, 9	Voided Ckts	7, 9, 11	Voided Ckts	2, 4, 6	Voided Ckts	2, 6, 11, 13																																																																																					
			Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002	Pack Per	PK-41792-002																																																																																					
Ckts	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number																																																																																							
2																																																																																															
3																																																																																															
4																																																																																															
5																																																																																															
6																																																																																															
7																																																																																															
8																																																																																															
9																																																																																															
10	41792-0667	A-41792-0667																																																																																													
11																																																																																															
12			41792-0677	A-41792-0677	41792-0690	A-41792-0690																																																																																									
13																																																																																															
14							41792-0698	A-41792-0698																																																																																							
15																																																																																															
16																																																																																															
17																																																																																															
18																																																																																															
<table border="1"> <tr> <td colspan="11">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td> </tr> <tr> <td colspan="2">DIMENSION UNITS</td> <td colspan="2">SCALE</td> <td colspan="7">CURRENT REV DESC: OBSOLETE PART NUMBER</td> </tr> <tr> <td colspan="2">MM/IN</td> <td colspan="2">1:1</td> <td colspan="7" rowspan="5"> <div style="text-align: center;"><b>molex</b></div>           KK .156 HEADER ASSEMBLY            FRICTION LOCK RIGHT ANGLE W/O PEGS            PRODUCT CUSTOMER DRAWING         </td> </tr> <tr> <td colspan="4">GENERAL TOLERANCES (UNLESS SPECIFIED)</td> </tr> <tr> <td></td> <td>MM</td> <td>INCH</td> <td></td> </tr> <tr> <td>4 PLACES</td> <td>±</td> <td>±</td> <td></td> </tr> <tr> <td>3 PLACES</td> <td>±</td> <td>±</td> <td>0.01</td> </tr> <tr> <td>2 PLACES</td> <td>±</td> <td>±</td> <td>0.25 / 0.015</td> </tr> <tr> <td>1 PLACE</td> <td>±</td> <td>±</td> <td>0.38</td> </tr> <tr> <td>0 PLACES</td> <td>±</td> <td>±</td> <td></td> </tr> <tr> <td colspan="4">ANGULAR TOL ± 0.5°</td> <td colspan="2">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td> <td colspan="2">THIRD ANGLE PROJECTION</td> <td colspan="2">DRAWING</td> <td colspan="2">SERIES</td> </tr> <tr> <td colspan="4"></td> <td colspan="2"> </td> <td colspan="2">B-SIZE</td> <td colspan="2">41792</td> <td colspan="2">SEE TABLE</td> </tr> </table>											THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER							MM/IN		1:1		<div style="text-align: center;"><b>molex</b></div> KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS PRODUCT CUSTOMER DRAWING							GENERAL TOLERANCES (UNLESS SPECIFIED)					MM	INCH		4 PLACES	±	±		3 PLACES	±	±	0.01	2 PLACES	±	±	0.25 / 0.015	1 PLACE	±	±	0.38	0 PLACES	±	±		ANGULAR TOL ± 0.5°				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES								B-SIZE		41792		SEE TABLE	
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																																																																															
DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER																																																																																											
MM/IN		1:1		<div style="text-align: center;"><b>molex</b></div> KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS PRODUCT CUSTOMER DRAWING																																																																																											
GENERAL TOLERANCES (UNLESS SPECIFIED)																																																																																															
	MM	INCH																																																																																													
4 PLACES	±	±																																																																																													
3 PLACES	±	±	0.01																																																																																												
2 PLACES	±	±	0.25 / 0.015																																																																																												
1 PLACE	±	±	0.38																																																																																												
0 PLACES	±	±																																																																																													
ANGULAR TOL ± 0.5°				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES																																																																																					
						B-SIZE		41792		SEE TABLE																																																																																					
<table border="1"> <tr> <td colspan="2">DOCUMENT STATUS</td> <td>P1</td> <td>RELEASE DATE</td> <td>2020/12/10</td> <td>08:28:35</td> <td colspan="5"></td> </tr> <tr> <td colspan="2">FORMAT: Eng-lega-master-ib-prod-8</td> <td colspan="2">REVISION: E</td> <td colspan="7">DATE: 2020/1/14</td> </tr> </table>											DOCUMENT STATUS		P1	RELEASE DATE	2020/12/10	08:28:35						FORMAT: Eng-lega-master-ib-prod-8		REVISION: E		DATE: 2020/1/14																																																																					
DOCUMENT STATUS		P1	RELEASE DATE	2020/12/10	08:28:35																																																																																										
FORMAT: Eng-lega-master-ib-prod-8		REVISION: E		DATE: 2020/1/14																																																																																											
	9	8	7	6	5	4	3	2	1																																																																																						

41792

OPTIONS	Group	A-41792-0704	Group		Group		Group	
	Header No:	41790-0005/0018	Header No:		Header No:		Header No:	
	Pin No:	43294-0572	Pin No:		Pin No:		Pin No:	
	Plating:	197 - TIN	Plating:		Plating:		Plating:	
	Pin Length L	27.94 / 1.100	Pin Length L		Pin Length L		Pin Length L	
	Mating M	11.43 / .450	Mating M		Mating M		Mating M	
	Gold Loc G	N/A	Gold Loc G		Gold Loc G		Gold Loc G	
	Height Y	5.41 / .213	Height Y		Height Y		Height Y	
	PC Tail P	3.96/ .156	PC Tail P		PC Tail P		PC Tail P	
	Tin Loc T	OVERALL	Tin Loc T		Tin Loc T		Tin Loc T	
	Voided Ckts	2, 3, 5	Voided Ckts		Voided Ckts		Voided Ckts	
	Pack Per	PK-41792-002	Pack Per		Pack Per		Pack Per	
	Ckts	Material No	Engineer Number	Material No	Engineer Number	Material No	Engineer Number	Material No
2								
3								
4								
5								
6	41792-0704	A-41792-0704						
7								
8								
9								
10								
11								
12								
13								
14								
15								
16								
17								
18								

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC: OBSOLETE PART NUMBER					
MM/IN		1:1		<p><b>molex</b></p> <p>KK .156 HEADER ASSEMBLY FRICTION LOCK RIGHT ANGLE W/O PEGS</p> <p>PRODUCT CUSTOMER DRAWING</p> <p>EC NO: 650267 DRWN: SKANDB 2020/10/27 CHK'D: GGA 2020/12/10 APPR: GGA 2020/12/10</p> <p>INITIAL REVISION: DRWN: JSCHAFFER 11-07-03 APPR: MARGULIS 11-17-03</p>					
GENERAL TOLERANCES (UNLESS SPECIFIED)									
	MM	INCH							
4 PLACES	±		±						
3 PLACES	±		± 0.01						
2 PLACES	± 0.25		± 0.015						
1 PLACE	± 0.38		±						
0 PLACES	±		±						
ANGULAR TOL ± 0.5°				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING	
DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION		SHEET NUMBER	
SDA-41792		PSD		000		L1		8 OF 8	
MATERIAL NUMBER		CUSTOMER		SERIES		DRAWING		SHEET NUMBER	
SEE TABLE		GENERAL MARKET		B-SIZE		41792		8 OF 8	



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)  
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)