

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [5040501091](#)  
**Status:** **Active**  
**Overview:** [Pico-Lock Connector System](#)  
**Description:** 1.50mm Pitch, Pico-Lock PCB Header, Single Row, Right-Angle, Surface Mount, Gold (Au) Plating, Positive Lock, 10 Circuits, Tape and Reel

**Documents:**

|   |   |
|---|---|
| <a href="#">Drawing (PDF)</a>                                 | <a href="#">Application Specification AS-504051-001-001 (PDF)</a> |
| <a href="#">3D Model (PDF)</a>                                | <a href="#">Packaging Specification SPK-504050-001-001 (PDF)</a>  |
| <a href="#">3D Model</a>                                      | <a href="#">Datasheet (PDF)</a>                                   |
| <a href="#">Product Specification 5040511001-PS-000 (PDF)</a> | <a href="#">RoHS Certificate of Compliance (PDF)</a>              |
| <a href="#">Product Specification PS-504051-001-001 (PDF)</a> |   |

**Agency Certification**

|     |         |
|-----|---------|
| CSA | LR19980 |
| UL  | E29179  |

**General**


|                |  |
|----------------|--|
| Product Family | PCB Headers                                |
| Series         | <a href="#">504050</a>                     |
| Application    | Signal, Wire-to-Board                      |
| Overview       | <a href="#">Pico-Lock Connector System</a> |
| Product Name   | Pico-Lock                                  |
| UPC            | 884982939875                               |

**Physical**

|                                |                                |
|--------------------------------|--------------------------------|
| Breakaway                      | No                             |
| Circuits (Loaded)              | 10                             |
| Circuits (maximum)             | 10                             |
| Color - Resin                  | Black                          |
| Durability (mating cycles max) | 30                             |
| First Mate / Last Break        | No                             |
| Flammability                   | 94V-0                          |
| Glow-Wire Capable              | No                             |
| Guide to Mating Part           | No                             |
| Keying to Mating Part          | N/A                            |
| Lock to Mating Part            | Yes                            |
| Mated Height                   | 2.00mm                         |
| Material - Metal               | Copper Alloy                   |
| Material - Plating Mating      | Gold                           |
| Material - Resin               | High Temperature Thermoplastic |
| Net Weight                     | 226.720/mg                     |
| Number of Rows                 | 1                              |
| Orientation                    | Right Angle                    |
| Packaging Type                 | Embossed Tape on Reel          |
| Pitch - Mating Interface       | 1.50mm                         |
| Pitch - Termination Interface  | 1.50mm                         |
| Plating min - Mating           | 0.100µm                        |
| Polarized to Mating Part       | Yes                            |
| Shrouded                       | Yes                            |
| Stackable                      | No                             |
| Surface Mount Compatible (SMC) | Yes                            |
| Temperature Range - Operating  | -40° to +105°C                 |
| Termination Interface: Style   | Surface Mount                  |

**Electrical**

|                               |      |
|-------------------------------|------|
| Current - Maximum per Contact | 2.0A |
|-------------------------------|------|

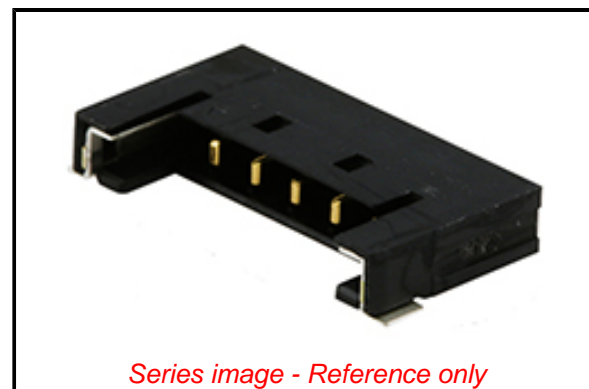

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2021)4569-DC (8  
July 2021)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[504050 Series](#)

**Mates With**

Pico-Lock Crimp Housing [504051](#) <br>Pico-Lock Cable Assembly [15132](#)

Voltage - Maximum

150V AC (RMS)/DC

**Material Info**

**Reference - Drawing Numbers**

Application Specification

AS-504051-001-001

Packaging Specification

SPK-504050-001-001

Product Specification

5040511001-PS-000, PS-504051-001-001

Sales Drawing

5040500000-SD-000, 5040500000-SD-001

This document was generated on 09/27/2021

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)  
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-](#)  
[5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-](#)  
[367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)