

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [5054481871](#)
Status: **Active**
Overview: [Micro-Lock Plus Wire-to-Board Connector System](#)
Description: 1.25mm Pitch, Micro-Lock Plus PCB Header, Dual Row, Right-Angle, Surface Mount, Tin-Bismuth Plating, Positive Lock, 18 Circuits, Black

Documents:

2D Drawing DXF (PDF)	Product Specification 5054321000-PS-002 (PDF)
Drawing (PDF)	Product Specification 5054321000-PS-006 (PDF)
3D Model	Application Specification AS-505432-001-001 (PDF)
2D Drawing (DXF)	Packaging Specification 5054489200-200 (PDF)
3D Model (PDF)	Datasheet (PDF)
Product Specification 5054320000-002 (PDF)	RoHS Certificate of Compliance (PDF)
Product Specification 5054320000-005 (PDF)	

Agency Certification


UL E29179

General

Product Family	PCB Headers
Series	505448
Application	Signal, Wire-to-Board
Overview	Micro-Lock Plus Wire-to-Board Connector System
Product Name	Micro-Lock Plus
UPC	889056386791

Physical

Breakaway	No
Circuits (Loaded)	18
Circuits (maximum)	18
Color - Resin	Black
Durability (mating cycles max)	30
First Mate / Last Break	No
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Tin-Bismuth
Material - Plating Termination	Tin-Bismuth
Material - Resin	Polyamide
Net Weight	1700.551/mg
Number of Rows	2
Orientation	Right Angle
PCB Locator	No
PCB Retention	Yes
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	1.25mm
Pitch - Termination Interface	1.25mm
Plating min - Mating	1.000µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Surface Mount

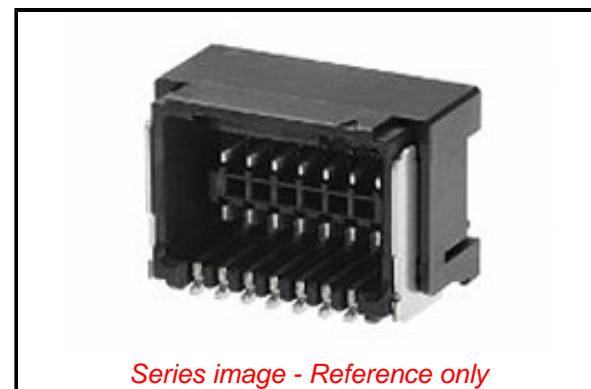

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2021)4569-DC (8
July 2021)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[505448 Series](#)

Mates With

[Micro-Lock Plus Receptacle Housing](#)
[505432](#)

Electrical

Current - Maximum per Contact
Voltage - Maximum

1.5A
50V AC (RMS)/DC

Material Info**Reference - Drawing Numbers**

Application Specification
Packaging Specification
Product Specification

AS-505432-001-001
5054489200-200
5054320000-002, 5054320000-005, 5054321000-
PS-002, 5054321000-PS-006
5054480000-000

Sales Drawing

This document was generated on 10/11/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)