

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0050841015](#)  
**Status:** **Active**  
**Overview:** [MLX Power Connectors](#)  
**Description:** 2.13mm Diameter MLX Power Crimp Housing Plug, Nylon 6/6, 94V-0, 1 Circuit, Natural

**Documents:**

<a href="#">3D Model (PDF)</a>	<a href="#">Packaging Specification PK-42021-XX-001 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Test Summary TS-42022-0001-001 (PDF)</a>
<a href="#">3D Model</a>	<a href="#">Datasheet (PDF)</a>
<a href="#">Product Specification PS-42022-0001-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>

**Agency Certification**

CSA	LR19980
UL	E29179

**General**

Product Family	Crimp Housings
Series	<a href="#">42021</a>
Application	Power, Wire-to-Board, Wire-to-Wire
Comments	Glow Wire Equivalent Part Number <a href="#">366430001</a> . Flammability Rating: 94V-0. Current – Maximum per contact 20A if used with <a href="#">36663</a> and <a href="#">36664</a> terminal
Overview	<a href="#">MLX Power Connectors</a>
Product Name	MLX
UPC	800753875043

**Physical**

Circuits (maximum)	1
Circuits Detail	1
Color - Resin	Natural
Flammability	94V-0
Gender	Plug
Glow-Wire Capable	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Resin	Nylon
Net Weight	0.807/g
Number of Rows	1
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface	N/A
Pitch - Termination Interface	N/A
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-55° to +105°C

**Electrical**

Current - Maximum per Contact	13.5A, 20.0A
-------------------------------	--------------

**Solder Process Data**


Lead-freeProcess Capability	N/A
-----------------------------	-----

**Material Info**

Engineering Number	42021-1C
--------------------	----------

**Reference - Drawing Numbers**

Packaging Specification	PK-42021-XX-001
Product Specification	PS-42022-0001-001

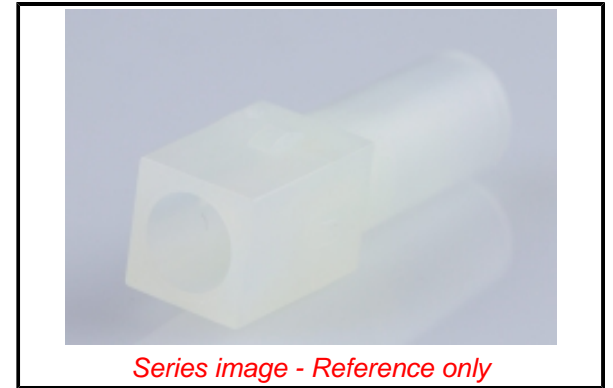

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2021)4569-DC (8  
July 2021)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Relevant

**Search Parts in this Series**

[42021](#) Series

**Mates With**

MLX Power Connector Header [42002](#) . MLX Pin and Socket Receptacle [42022](#) . MLX Power Connector Header [43255](#)

**Use With**

MLX Crimp Terminal [36663](#) , [36664](#) , [42023](#) , [42024](#) . MLX Male Pre-Crimped Lead [797582029](#) , [797582030](#) . MLX Female Pre-Crimped Lead [797582031](#) , [797582032](#)

This document was generated on 09/13/2021

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pin & Socket Connectors](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[6450822-1](#) [770392-1](#) [794042-1](#) [796885-1](#) [8-794535-1](#) [PLR3455ACS-222](#) [R929991004](#) [R929993003](#) [1403611-1](#) [1-480349-5](#) [152302-5](#)  
[153211-2](#) [1586092-1](#) [1586129-1](#) [1586681-4](#) [1586700-1](#) [1586368-1](#) [1586380-1](#) [1586616-1](#) [1586680-5](#) [16-06-0038](#) [164164-5](#) [1-6609930-1](#)  
[172296-1](#) [19-09-2035](#) [200503-1](#) [200788-2](#) [2029090-4](#) [2029095-4](#) [925061-7](#) [293734-4](#) [293737-2](#) [1-765362-4](#) [1871534-1](#) [200833-4](#)  
[2008625-2](#) [2029027-2](#) [2029096-4](#) [R929991000](#) [R929991002](#) [R929993000](#) [319-10-101-00-005000](#) [319-10-102-00-001000](#) [319-10-104-00-001000](#) [319-10-105-00-001000](#) [319-10-108-00-001000](#) [319-10-112-00-006000](#) [39-01-8019](#) [319-10-101-00-001000](#) [319-10-102-00-005000](#)