


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0050842032](#)
Status: **Active**
Overview: [MLX Power Connectors](#)
Description: 2.13mm Diameter MLX Pin and Socket Receptacle, 3 Circuits, Natural

Documents:

| | |
|---|---|
| Drawing (PDF) | Packaging Specification PK-42022-XX-001 (PDF) |
| 3D Model | Test Summary TS-42022-0001-001 (PDF) |
| 3D Model (PDF) | Datasheet (PDF) |
| Product Specification PS-42022-0001-001 (PDF) | RoHS Certificate of Compliance (PDF) |

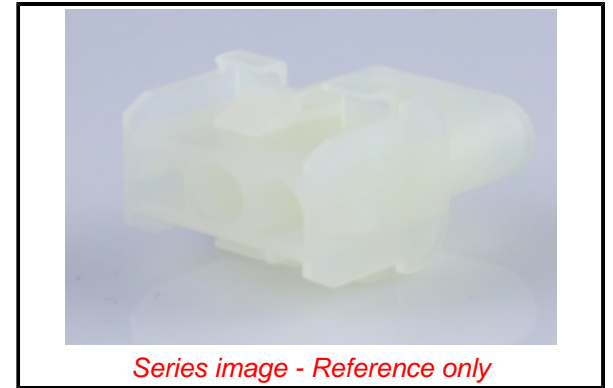

Agency Certification

| | |
|-----|---------|
| CSA | LR19980 |
| UL | E29179 |

General

| | |
|----------------|--|
| Product Family | Crimp Housings |
| Series | 42022 |
| Application | Power, Wire-to-Wire |
| Comments | Glow Wire Equivalent Part Number 366440003 . Current – Maximum per contact 20A if used with 36663 and 36664 terminal |
| Overview | MLX Power Connectors |
| Product Name | MLX |
| UPC | 800754386470 |

Physical

| | |
|-------------------------------|----------------|
| Circuits (maximum) | 3 |
| Circuits Detail | 3 |
| Color - Resin | Natural |
| Flammability | 94V-0 |
| Gender | Receptacle |
| Glow-Wire Capable | No |
| Keying to Mating Part | None |
| Lock to Mating Part | Yes |
| Material - Resin | Nylon |
| Net Weight | 3.230/g |
| Number of Rows | 1 |
| Packaging Type | Carton |
| Panel Mount | Yes |
| Pitch - Mating Interface | 6.35mm |
| Polarized to Mating Part | Yes |
| Stackable | No |
| Temperature Range - Operating | -55° to +105°C |

Electrical

| | |
|-------------------------------|-------|
| Current - Maximum per Contact | 20.0A |
|-------------------------------|-------|

Solder Process Data

| | |
|-----------------------------|-----|
| Lead-freeProcess Capability | N/A |
|-----------------------------|-----|

Material Info

| | |
|--------------------|----------|
| Engineering Number | 42022-3C |
|--------------------|----------|

Reference - Drawing Numbers

| | |
|-------------------------|-------------------|
| Packaging Specification | PK-42022-XX-001 |
| Product Specification | PS-42022-0001-001 |
| Sales Drawing | SD-42022-XX-001 |

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - D(2021)4569-DC (8 July 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[42022 Series](#)

Mates With

MLX Power Crimp Housing Plug [42021](#)

Use With

MLX Crimp Terminal [42023](#) , [42024](#) . MLX Male Pre-Crimped Lead [797582029](#) , [797582030](#) . MLX Female Pre-Crimped Lead [797582031](#) , [797582032](#)

This document was generated on 09/08/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Pin & Socket Connectors](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[6450822-1](#) [770392-1](#) [794042-1](#) [796885-1](#) [8-794535-1](#) [PLR3455ACS-222](#) [R929991004](#) [R929993003](#) [1403611-1](#) [1-480349-5](#) [152302-5](#)
[153211-2](#) [1586092-1](#) [1586129-1](#) [1586681-4](#) [1586700-1](#) [1586368-1](#) [1586380-1](#) [1586616-1](#) [1586680-5](#) [16-06-0038](#) [164164-5](#) [1-6609930-1](#)
[172296-1](#) [19-09-2035](#) [200503-1](#) [200788-2](#) [2029090-4](#) [2029095-4](#) [925061-7](#) [293734-4](#) [293737-2](#) [1-765362-4](#) [1871534-1](#) [200833-4](#)
[2008625-2](#) [2029027-2](#) [2029096-4](#) [R929991000](#) [R929991002](#) [R929993000](#) [319-10-101-00-005000](#) [319-10-102-00-001000](#) [319-10-104-00-001000](#) [319-10-105-00-001000](#) [319-10-108-00-001000](#) [319-10-112-00-006000](#) [39-01-8019](#) [319-10-101-00-001000](#) [319-10-102-00-005000](#)