

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0534600639](#)
Status: **Active**
Overview: [2.00mm I/O Connectors](#)
Description: 2.00mm Pitch IEEE 1394-1995 Shielded I/O PCB Socket, Right-Angle, Upright, with Kinked Solder Tabs, Reflow Dip, 6 Circuits

Documents:

3D Model	Packaging Specification 534609200-SPK-200 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)
3D Model (PDF)	Product Literature (PDF)
Product Specification 534600000-000 (PDF)	

Agency Certification


UL E29179

General

Product Family	I/O Connectors
Series	53460
Application	Wire-to-Board
Component Type	Receptacle
Overview	2.00mm I/O Connectors
Product Name	2.00mm I/O Connectors
Type	N/A
UPC	191128445184

Physical

Boot Color	N/A
Circuits (Loaded)	6
Circuits (maximum)	6
Color - Resin	Black
Flammability	94V-0
Gender	Female
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	3223.521/mg
Number of Rows	2
Orientation	Right Angle
PC Tail Length	3.00mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Tray
Panel Mount	No
Pitch - Mating Interface	2.00mm
Pitch - Termination Interface	2.00mm
Plating min - Mating	0.762µm
Plating min - Termination	1.000µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	1
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40° to +85°C
Termination Interface: Style	Through Hole
Waterproof / Dustproof	No

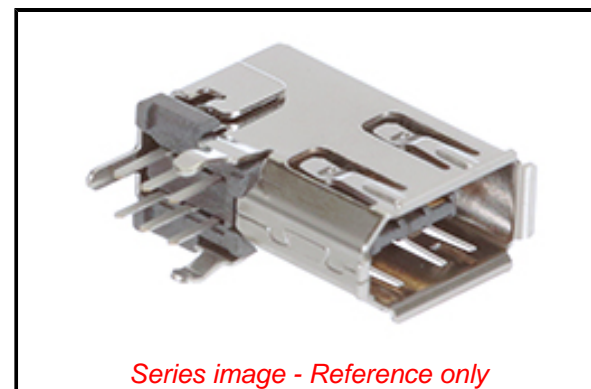

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2021)4569-DC (8
July 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[53460 Series](#)

Mates With

Serial I/O Connectors [551000670](#) ,
[551000680](#) , [5006540609](#)

Electrical

Current - Maximum per Contact	1.5A
Shield Type	Full Shield
Shielded	Yes
Voltage - Maximum	125V AC (RMS)/DC

Material Info**Reference - Drawing Numbers**

Packaging Specification	534609200-SPK-200
Product Specification	534600000-000
Sales Drawing	534600000-001

This document was generated on 09/29/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [IEEE 1394 Connectors](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[EHFF2](#) [PX0485/BK](#) [EHFWX2BX](#) [3E106-2230KV](#) [53460-0619](#) [3E106-0220KV](#) [1734290-2](#) [53460-0629](#) [53462-0629](#) [NA1394-6-W](#)
[5788516-1](#) [3E106-1230 KV](#) [3E306-3200-008](#) [FWF21NSCC](#) [FWFODE](#) [FWFTV22G](#) [FWFTVC2G](#) [FWFTVC2N](#) [JE14](#) [JE18](#) [PX0480/BK](#)
[928](#) [929](#) [930](#) [NA1394-6-W-B](#) [EHFW800X2](#) [5787956-1](#) [PX0419](#) [PX0847](#) [693-006-699-003](#) [45740-0001](#) [53460-0639](#) [53462-0001](#) [53984-](#)
[0681](#) [EHFW800X2B](#) [EHFW800X2PKG](#) [1734290-1](#)