

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0545960410](#)
Status: **Active**
Overview: Mini Mi II™ Wire Harness
Description: Mini Mi II Wire-to-Board Receptacle Housing Assembly, 1.25mm Pitch, Single Row, 4 Circuits

Documents:

| | |
|--|--|
| 3D Model | Product Specification PS-54596-020-001 (PDF) |
| Drawing (PDF) | Product Specification PS-54596-021-001 (PDF) |
| Product Specification PS-54596-005-001 (PDF) | Product Specification PS-54596-022-001 (PDF) |
| Product Specification PS-54596-006-001 (PDF) | Product Specification PS-54596-023-001 (PDF) |
| Product Specification PS-54596-007-001 (PDF) | Product Specification PS-55448-001-001 (PDF) |
| Product Specification PS-54596-018-001 (PDF) | Product Specification PS-55482-006-001 (PDF) |
| Product Specification PS-54596-019-001 (PDF) | RoHS Certificate of Compliance (PDF) |

General

| | |
|-------------------------|--|
| Product Family | IDT and Solder Connectors |
| Series | 54596 |
| Crimp Quality Equipment | Yes |
| Overview | Mini Mi II™ Wire Harness |
| Product Name | Mini Mi II |
| UPC | 800753280809 |

Physical

| | |
|--------------------------------|-----------------|
| Circuits (Loaded) | 4 |
| Circuits (maximum) | 4 |
| Color - Resin | Natural |
| Gender | Female |
| Glow-Wire Capable | No |
| Lock to Mating Part | None |
| Material - Metal | Phosphor Bronze |
| Material - Plating Mating | Tin |
| Material - Plating Termination | Tin |
| Material - Resin | Nylon |
| Net Weight | 126.600/mg |
| Number of Rows | 1 |
| Packaging Type | Bag |
| Panel Mount | No |
| Pitch - Mating Interface | 1.25mm |
| Plating min - Mating | 0.914µm |
| Plating min - Termination | 0.914µm |
| Stackable | No |
| Temperature Range - Operating | -40° to +105°C |
| Termination Interface: Style | IDT or Pierce |
| Wire Insulation Diameter | 0.80-0.90mm |
| Wire Size AWG | 26, 28 |


Electrical

| | |
|-------------------------------|------|
| Current - Maximum per Contact | 1.5A |
| Voltage - Maximum | 100V |

Material Info

Reference - Drawing Numbers

| | |
|-----------------------|---|
| Product Specification | PS-54596-005-001, PS-54596-006-001, PS-54596-007-001, PS-54596-018-001, PS-54596-019-001, PS-54596-020-001, PS-54596-021-001, PS-54596-022-001, |
|-----------------------|---|

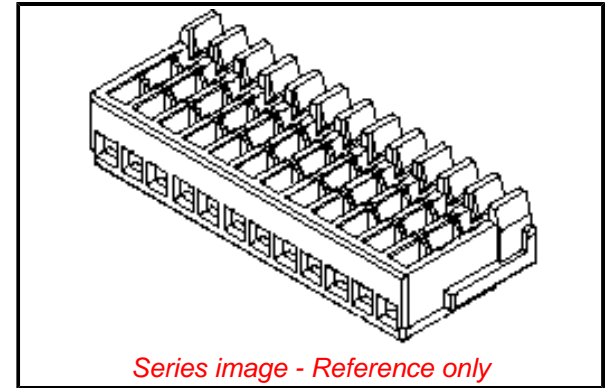

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per - ED/61/2018 (27 June 2018)

Halogen-Free

Status

Not Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS

ELV

Prop65

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Compliant

Not Contained

Search Parts in this Series

[54596](#) Series

Mates With

[55451](#) , [55447](#) , [55454](#) , [55659](#) , [55456](#) , [55482](#) , [55450](#)

Sales Drawing

PS-54596-023-001, PS-55448-001-001,
PS-55482-006-001
SD-54596-004

This document was generated on 09/10/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)