

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0621000700](#)  
**Status:** **Active**  
**Overview:** [Application Tooling](#)  
**Description:** IDT Discrete Handtool Module

**Documents:**

[RoHS Certificate of Compliance \(PDF\)](#)

**General**

|                                |   |
|--------------------------------|---|
| Product Family                 | Application Tooling   |
| Series                         | <a href="#">207129</a>  |
| Comments                       | Module for 2.54mm   |
| Function                       | Insulation Displacement (IDT)   |
| Geographic Area                | Global  |
| Level of Automation            | Manual  |
| More Detailed Tech Information | <a href="mailto:applicationtooling@molex.com">applicationtooling@molex.com</a>  |
| Overview                       | <a href="#">Application Tooling</a>   |
| Product Name                   | N/A   |
| Tool Type                      | Hand Crimp Tool   |
| UPC                            | 800753879324  |
| Warranty Disclaimer            | CAUTION: Molex tooling crimp specifications are valid only when used with Molex terminals and tooling manufactured by Molex and sold by Molex or authorized distributors ("Molex Tooling"). When using tooling other than Molex Tooling with Molex specific connector systems listed in our ATS documents, the Molex tooling qualification does not apply and the responsibility for full qualification of the connector system is that of the customer. Molex accepts no liability for connector performance or tooling support where tooling other than Molex Tooling is used or where Molex Tooling is modified. |


**Physical**

Net Weight 0.001/g

**Material Info**

**Reference - Drawing Numbers**

Application Tooling Documents [ATS-621000799-001](#)

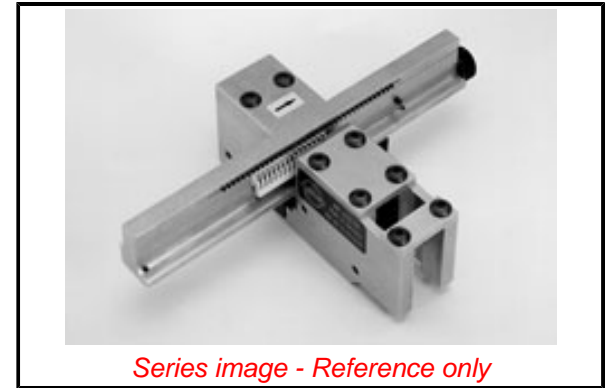

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
ED/30/2017 (7 July  
2017)

**Halogen-Free**

**Status**

**Not Relevant**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Not Relevant

Not Relevant

Not Reviewed

**Search Parts in this Series**

[207129 Series](#)

**Use With**

[636000478](#) , [11311570](#)

**Application Tooling** | **FAQ**

**Description**

**Product #**

2.54mm Pitch [14562021](#)

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
24 AWG, 0.38µm  
Gold (Au), 2 Circuits

2.54mm Pitch [14562022](#)

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24

AWG, 0.38μm Gold  
(Au), 2 Circuits  
2.54mm Pitch 14562023  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
26 AWG, 0.38μm  
Gold (Au), 2 Circuits  
2.54mm Pitch 14562024  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.38μm Gold  
(Au), 2 Circuits  
2.54mm Pitch 14562025  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
28 AWG, 0.38μm  
Gold (Au), 2 Circuits  
2.54mm Pitch 14562026  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.38μm Gold  
(Au), 2 Circuits  
2.54mm Pitch 14562027  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
24 AWG, 0.76μm  
Gold (Au), 2 Circuits  
2.54mm Pitch 14562028  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.76μm Gold  
(Au), 2 Circuits  
2.54mm Pitch 14562029  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
26 AWG, 0.76μm  
Gold (Au), 2 Circuits

2.54mm Pitch 14562031  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
24 AWG, 0.38µm  
Gold (Au), 3 Circuits

2.54mm Pitch 14562032  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 3 Circuits

2.54mm Pitch 14562033  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
26 AWG, 0.38µm  
Gold (Au), 3 Circuits

2.54mm Pitch 14562034  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 3 Circuits

2.54mm Pitch 14562035  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
28 AWG, 0.38µm  
Gold (Au), 3 Circuits

2.54mm Pitch 14562036  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.38µm Gold  
(Au), 3 Circuits

2.54mm Pitch 14562037  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
24 AWG, 0.76µm  
Gold (Au), 3 Circuits

2.54mm Pitch 14562038  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 3 Circuits  
2.54mm Pitch 14562039  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
26 AWG, 0.76µm  
Gold (Au), 3 Circuits  
2.54mm Pitch 14562041  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
24 AWG, 0.38µm  
Gold (Au), 4 Circuits  
2.54mm Pitch 14562042  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 4 Circuits  
2.54mm Pitch 14562043  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
26 AWG, 0.38µm  
Gold (Au), 4 Circuits  
2.54mm Pitch 14562044  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 4 Circuits  
2.54mm Pitch 14562049  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
26 AWG, 0.76µm  
Gold (Au), 4 Circuits  
2.54mm Pitch 14562051  
SL Insulation

Displacement  
Connector Assembly,

Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
24 AWG, 0.38 $\mu$ m  
Gold (Au), 5 Circuits  
2.54mm Pitch 14562052  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.38 $\mu$ m Gold  
(Au), 5 Circuits  
2.54mm Pitch 14562053  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
26 AWG, 0.38 $\mu$ m  
Gold (Au), 5 Circuits  
2.54mm Pitch 14562054  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 5 Circuits  
2.54mm Pitch 14562055  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
28 AWG, 0.38 $\mu$ m  
Gold (Au), 5 Circuits  
2.54mm Pitch 14562056  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 5 Circuits  
2.54mm Pitch 14562057  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
24 AWG, 0.76 $\mu$ m  
Gold (Au), 5 Circuits  
2.54mm Pitch 14562058  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive

Lock, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 5 Circuits  
2.54mm Pitch 14562059  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
26 AWG, 0.76µm  
Gold (Au), 5 Circuits  
2.54mm Pitch 14562061  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
24 AWG, 0.38µm  
Gold (Au), 6 Circuits  
2.54mm Pitch 14562062  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 6 Circuits  
2.54mm Pitch 14562063  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
26 AWG, 0.38µm  
Gold (Au), 6 Circuits  
2.54mm Pitch 14562064  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 6 Circuits  
2.54mm Pitch 14562065  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
28 AWG, 0.38µm  
Gold (Au), 6 Circuits  
2.54mm Pitch 14562066  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28

AWG, 0.38 $\mu$ m Gold  
(Au), 6 Circuits  
2.54mm Pitch 14562067  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
24 AWG, 0.76 $\mu$ m  
Gold (Au), 6 Circuits  
2.54mm Pitch 14562068  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.76 $\mu$ m Gold  
(Au), 6 Circuits  
2.54mm Pitch 14562069  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
26 AWG, 0.76 $\mu$ m  
Gold (Au), 6 Circuits  
2.54mm Pitch 14562071  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
24 AWG, 0.38 $\mu$ m  
Gold (Au), 7 Circuits  
2.54mm Pitch 14562072  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.38 $\mu$ m Gold  
(Au), 7 Circuits  
2.54mm Pitch 14562073  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
26 AWG, 0.38 $\mu$ m  
Gold (Au), 7 Circuits  
2.54mm Pitch 14562074  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 7 Circuits

2.54mm Pitch 14562075  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
28 AWG, 0.38µm  
Gold (Au), 7 Circuits

2.54mm Pitch 14562076  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.38µm Gold  
(Au), 7 Circuits

2.54mm Pitch 14562077  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
24 AWG, 0.76µm  
Gold (Au), 7 Circuits

2.54mm Pitch 14562078  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 7 Circuits

2.54mm Pitch 14562079  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
26 AWG, 0.76µm  
Gold (Au), 7 Circuits

2.54mm Pitch 14562081  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
24 AWG, 0.38µm  
Gold (Au), 8 Circuits

2.54mm Pitch 14562082  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 8 Circuits

2.54mm Pitch 14562083  
SL Insulation



Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
26 AWG, 0.38µm  
Gold (Au), 8 Circuits  
2.54mm Pitch 14562084  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 8 Circuits  
2.54mm Pitch 14562085  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
28 AWG, 0.38µm  
Gold (Au), 8 Circuits  
2.54mm Pitch 14562086  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.38µm Gold  
(Au), 8 Circuits  
2.54mm Pitch 14562087  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
24 AWG, 0.76µm  
Gold (Au), 8 Circuits  
2.54mm Pitch 14562088  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 8 Circuits  
2.54mm Pitch 14562089  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
26 AWG, 0.76µm  
Gold (Au), 8 Circuits  
2.54mm Pitch 14562091  
SL Insulation

Displacement  
Connector Assembly,

Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
24 AWG, 0.38 $\mu$ m  
Gold (Au), 9 Circuits  
2.54mm Pitch [14562092](#)  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.38 $\mu$ m Gold  
(Au), 9 Circuits  
2.54mm Pitch [14562093](#)  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
26 AWG, 0.38 $\mu$ m  
Gold (Au), 9 Circuits  
2.54mm Pitch [14562094](#)  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 9 Circuits  
2.54mm Pitch [14562095](#)  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
28 AWG, 0.38 $\mu$ m  
Gold (Au), 9 Circuits  
2.54mm Pitch [14562096](#)  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 9 Circuits  
2.54mm Pitch [14562097](#)  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
24 AWG, 0.76 $\mu$ m  
Gold (Au), 9 Circuits  
2.54mm Pitch [14562098](#)  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive

Lock, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 9 Circuits  
2.54mm Pitch 14562099  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
26 AWG, 0.76µm  
Gold (Au), 9 Circuits  
2.54mm Pitch 14562101  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.38µm Gold (Au),  
10 Circuits  
2.54mm Pitch 14562102  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 10 Circuits  
2.54mm Pitch 14562103  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.38µm Gold (Au),  
10 Circuits  
2.54mm Pitch 14562104  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 10 Circuits  
2.54mm Pitch 14562105  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.38µm Gold (Au),  
10 Circuits  
2.54mm Pitch 14562106  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,

Version G, Positive  
Lock, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 10 Circuits  
2.54mm Pitch 14562107  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.76 $\mu$ m Gold (Au),  
10 Circuits  
2.54mm Pitch 14562108  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.76 $\mu$ m Gold  
(Au), 10 Circuits  
2.54mm Pitch 14562109  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.76 $\mu$ m Gold (Au),  
10 Circuits  
2.54mm Pitch 14562111  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.38 $\mu$ m Gold (Au),  
11 Circuits  
2.54mm Pitch 14562113  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.38 $\mu$ m Gold (Au),  
11 Circuits  
2.54mm Pitch 14562114  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 11 Circuits  
2.54mm Pitch 14562115  
SL Insulation  
Displacement

Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.38µm Gold (Au),  
11 Circuits  
2.54mm Pitch 14562116

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.38µm Gold  
(Au), 11 Circuits  
2.54mm Pitch 14562117

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.76µm Gold (Au),  
11 Circuits  
2.54mm Pitch 14562118

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 11 Circuits  
2.54mm Pitch 14562119

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.76µm Gold (Au),  
11 Circuits  
2.54mm Pitch 14562121

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.38µm Gold (Au),  
12 Circuits  
2.54mm Pitch 14562122

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 12 Circuits

2.54mm Pitch 14562123

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.38 $\mu$ m Gold (Au),  
12 Circuits

2.54mm Pitch 14562124

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 12 Circuits

2.54mm Pitch 14562125

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.38 $\mu$ m Gold (Au),  
12 Circuits

2.54mm Pitch 14562126

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 12 Circuits

2.54mm Pitch 14562127

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.76 $\mu$ m Gold (Au),  
12 Circuits

2.54mm Pitch 14562128

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.76 $\mu$ m Gold  
(Au), 12 Circuits

2.54mm Pitch 14562129

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,

0.76µm Gold (Au),  
12 Circuits  
2.54mm Pitch 14562131  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.38µm Gold (Au),  
13 Circuits  
2.54mm Pitch 14562132  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 13 Circuits  
2.54mm Pitch 14562133  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.38µm Gold (Au),  
13 Circuits  
2.54mm Pitch 14562134  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 13 Circuits  
2.54mm Pitch 14562135  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.38µm Gold (Au),  
13 Circuits  
2.54mm Pitch 14562136  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.38µm Gold  
(Au), 13 Circuits  
2.54mm Pitch 14562137  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,

Non-polarized,  
Wire Size 24 AWG,  
0.76µm Gold (Au),  
13 Circuits  
2.54mm Pitch 14562138  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 13 Circuits  
2.54mm Pitch 14562139  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.76µm Gold (Au),  
13 Circuits  
2.54mm Pitch 14562141  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.38µm Gold (Au),  
14 Circuits  
2.54mm Pitch 14562142  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 14 Circuits  
2.54mm Pitch 14562143  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.38µm Gold (Au),  
14 Circuits  
2.54mm Pitch 14562144  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 14 Circuits  
2.54mm Pitch 14562145  
SL Insulation  
Displacement  
Connector Assembly,



Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.38 $\mu$ m Gold (Au),  
14 Circuits  
2.54mm Pitch 14562146  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 14 Circuits  
2.54mm Pitch 14562147  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.76 $\mu$ m Gold (Au),  
14 Circuits  
2.54mm Pitch 14562148  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.76 $\mu$ m Gold  
(Au), 14 Circuits  
2.54mm Pitch 14562149  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.76 $\mu$ m Gold (Au),  
14 Circuits  
2.54mm Pitch 14562151  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.38 $\mu$ m Gold (Au),  
15 Circuits  
2.54mm Pitch 14562152  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.38 $\mu$ m Gold  
(Au), 15 Circuits  
2.54mm Pitch 14562153  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.38 $\mu$ m Gold (Au),  
15 Circuits  
2.54mm Pitch 14562154  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 15 Circuits  
2.54mm Pitch 14562155  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.38 $\mu$ m Gold (Au),  
15 Circuits  
2.54mm Pitch 14562156  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 15 Circuits  
2.54mm Pitch 14562157  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.76 $\mu$ m Gold (Au),  
15 Circuits  
2.54mm Pitch 14562158  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.76 $\mu$ m Gold  
(Au), 15 Circuits  
2.54mm Pitch 14562159  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.76 $\mu$ m Gold (Au),  
15 Circuits

2.54mm Pitch 14562161  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.38µm Gold (Au),  
16 Circuits

2.54mm Pitch 14562162  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 16 Circuits

2.54mm Pitch 14562163  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.38µm Gold (Au),  
16 Circuits

2.54mm Pitch 14562164  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 16 Circuits

2.54mm Pitch 14562165  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.38µm Gold (Au),  
16 Circuits

2.54mm Pitch 14562166  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.38µm Gold  
(Au), 16 Circuits

2.54mm Pitch 14562167  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,

0.76µm Gold (Au),  
16 Circuits  
2.54mm Pitch 14562168  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 16 Circuits  
2.54mm Pitch 14562169  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.76µm Gold (Au),  
16 Circuits  
2.54mm Pitch 14562171  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.38µm Gold (Au),  
17 Circuits  
2.54mm Pitch 14562172  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 17 Circuits  
2.54mm Pitch 14562173  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.38µm Gold (Au),  
17 Circuits  
2.54mm Pitch 14562174  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 17 Circuits  
2.54mm Pitch 14562175  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,

Non-polarized,  
Wire Size 28 AWG,  
0.38 $\mu$ m Gold (Au),  
17 Circuits  
2.54mm Pitch 14562176  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 17 Circuits  
2.54mm Pitch 14562177  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.76 $\mu$ m Gold (Au),  
17 Circuits  
2.54mm Pitch 14562178  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.76 $\mu$ m Gold  
(Au), 17 Circuits  
2.54mm Pitch 14562179  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.76 $\mu$ m Gold (Au),  
17 Circuits  
2.54mm Pitch 14562181  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.38 $\mu$ m Gold (Au),  
18 Circuits  
2.54mm Pitch 14562182  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.38 $\mu$ m Gold  
(Au), 18 Circuits  
2.54mm Pitch 14562183  
SL Insulation  
Displacement  
Connector Assembly,

Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.38 $\mu$ m Gold (Au),  
18 Circuits  
2.54mm Pitch 14562184  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 18 Circuits  
2.54mm Pitch 14562185  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.38 $\mu$ m Gold (Au),  
18 Circuits  
2.54mm Pitch 14562186  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 18 Circuits  
2.54mm Pitch 14562187  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.76 $\mu$ m Gold (Au),  
18 Circuits  
2.54mm Pitch 14562188  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.76 $\mu$ m Gold  
(Au), 18 Circuits  
2.54mm Pitch 14562189  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.76 $\mu$ m Gold (Au),  
18 Circuits  
2.54mm Pitch 14562191  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.38µm Gold (Au),  
19 Circuits  
2.54mm Pitch 14562192  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 19 Circuits  
2.54mm Pitch 14562193  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.38µm Gold (Au),  
19 Circuits  
2.54mm Pitch 14562194  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 19 Circuits  
2.54mm Pitch 14562195  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.38µm Gold (Au),  
19 Circuits  
2.54mm Pitch 14562196  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.38µm Gold  
(Au), 19 Circuits  
2.54mm Pitch 14562197  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.76µm Gold (Au),  
19 Circuits

2.54mm Pitch [14562198](#)

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 19 Circuits

2.54mm Pitch [14562199](#)

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.76µm Gold (Au),  
19 Circuits

2.54mm Pitch [14562201](#)

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.38µm Gold (Au),  
20 Circuits

2.54mm Pitch [14562202](#)

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 20 Circuits

2.54mm Pitch [14562203](#)

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.38µm Gold (Au),  
20 Circuits

2.54mm Pitch [14562204](#)

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 20 Circuits

2.54mm Pitch [14562205](#)

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,



0.38 $\mu$ m Gold (Au),  
20 Circuits  
2.54mm Pitch 14562206  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 20 Circuits  
2.54mm Pitch 14562207  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.76 $\mu$ m Gold (Au),  
20 Circuits  
2.54mm Pitch 14562208  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.76 $\mu$ m Gold  
(Au), 20 Circuits  
2.54mm Pitch 14562209  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.76 $\mu$ m Gold (Au),  
20 Circuits  
2.54mm Pitch 14562211  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.38 $\mu$ m Gold (Au),  
21 Circuits  
2.54mm Pitch 14562212  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.38 $\mu$ m Gold  
(Au), 21 Circuits  
2.54mm Pitch 14562213  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,

Non-polarized,  
Wire Size 26 AWG,  
0.38 $\mu$ m Gold (Au),  
21 Circuits  
2.54mm Pitch 14562214  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 21 Circuits  
2.54mm Pitch 14562215  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.38 $\mu$ m Gold (Au),  
21 Circuits  
2.54mm Pitch 14562216  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 21 Circuits  
2.54mm Pitch 14562217  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.76 $\mu$ m Gold (Au),  
21 Circuits  
2.54mm Pitch 14562218  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.76 $\mu$ m Gold  
(Au), 21 Circuits  
2.54mm Pitch 14562219  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.76 $\mu$ m Gold (Au),  
21 Circuits  
2.54mm Pitch 14562221  
SL Insulation  
Displacement  
Connector Assembly,

Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.38 $\mu$ m Gold (Au),  
22 Circuits  
2.54mm Pitch 14562222  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.38 $\mu$ m Gold  
(Au), 22 Circuits  
2.54mm Pitch 14562223  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.38 $\mu$ m Gold (Au),  
22 Circuits  
2.54mm Pitch 14562224  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 22 Circuits  
2.54mm Pitch 14562225  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.38 $\mu$ m Gold (Au),  
22 Circuits  
2.54mm Pitch 14562226  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 22 Circuits  
2.54mm Pitch 14562227  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.76 $\mu$ m Gold (Au),  
22 Circuits  
2.54mm Pitch 14562228  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 22 Circuits  
2.54mm Pitch 14562229  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.76µm Gold (Au),  
22 Circuits  
2.54mm Pitch 14562231  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.38µm Gold (Au),  
23 Circuits  
2.54mm Pitch 14562232  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 23 Circuits  
2.54mm Pitch 14562233  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.38µm Gold (Au),  
23 Circuits  
2.54mm Pitch 14562234  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 23 Circuits  
2.54mm Pitch 14562235  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.38µm Gold (Au),  
23 Circuits

2.54mm Pitch [14562236](#)

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 23 Circuits

2.54mm Pitch [14562237](#)

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.76 $\mu$ m Gold (Au),  
23 Circuits

2.54mm Pitch [14562238](#)

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.76 $\mu$ m Gold  
(Au), 23 Circuits

2.54mm Pitch [14562239](#)

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.76 $\mu$ m Gold (Au),  
23 Circuits

2.54mm Pitch [14562241](#)

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.38 $\mu$ m Gold (Au),  
24 Circuits

2.54mm Pitch [14562242](#)

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.38 $\mu$ m Gold  
(Au), 24 Circuits

2.54mm Pitch [14562243](#)

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,

0.38µm Gold (Au),  
24 Circuits  
2.54mm Pitch 14562244  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 24 Circuits  
2.54mm Pitch 14562245  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.38µm Gold (Au),  
24 Circuits  
2.54mm Pitch 14562246  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.38µm Gold  
(Au), 24 Circuits  
2.54mm Pitch 14562247  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.76µm Gold (Au),  
24 Circuits  
2.54mm Pitch 14562248  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 24 Circuits  
2.54mm Pitch 14562249  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.76µm Gold (Au),  
24 Circuits  
2.54mm Pitch 14562251  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,

Non-polarized,  
Wire Size 24 AWG,  
0.38 $\mu$ m Gold (Au),  
25 Circuits  
2.54mm Pitch 14562252  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.38 $\mu$ m Gold  
(Au), 25 Circuits  
2.54mm Pitch 14562253  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.38 $\mu$ m Gold (Au),  
25 Circuits  
2.54mm Pitch 14562254  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 25 Circuits  
2.54mm Pitch 14562255  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.38 $\mu$ m Gold (Au),  
25 Circuits  
2.54mm Pitch 14562256  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 25 Circuits  
2.54mm Pitch 14562257  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 24 AWG,  
0.76 $\mu$ m Gold (Au),  
25 Circuits  
2.54mm Pitch 14562258  
SL Insulation  
Displacement  
Connector Assembly,

Female, Single Row,  
Version G, Positive  
Lock, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 25 Circuits  
2.54mm Pitch 14562259  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 26 AWG,  
0.76µm Gold (Au),  
25 Circuits  
2.54mm Pitch 14563021  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 2 Circuits  
2.54mm Pitch 14563022  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
28 AWG, 0.76µm  
Gold (Au), 2 Circuits  
2.54mm Pitch 14563023  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 2 Circuits  
2.54mm Pitch 14563024  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 2 Circuits  
2.54mm Pitch 14563025  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 2 Circuits  
2.54mm Pitch 14563026  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,



Version C, Front  
Ribs, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 2 Circuits  
2.54mm Pitch 14563027  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 2 Circuits  
2.54mm Pitch 14563028  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 2 Circuits  
2.54mm Pitch 14563029  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 2 Circuits  
2.54mm Pitch 14563031  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.76 $\mu$ m Gold  
(Au), 3 Circuits  
2.54mm Pitch 14563032  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
28 AWG, 0.76 $\mu$ m  
Gold (Au), 3 Circuits  
2.54mm Pitch 14563033  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.76 $\mu$ m Gold  
(Au), 3 Circuits  
2.54mm Pitch 14563034  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24

AWG, 0.38 $\mu$ m Gold  
(Au), 3 Circuits  
2.54mm Pitch 14563035  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.38 $\mu$ m Gold  
(Au), 3 Circuits  
2.54mm Pitch 14563036  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 3 Circuits  
2.54mm Pitch 14563037  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 3 Circuits  
2.54mm Pitch 14563038  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 3 Circuits  
2.54mm Pitch 14563039  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 3 Circuits  
2.54mm Pitch 14563041  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.76 $\mu$ m Gold  
(Au), 4 Circuits  
2.54mm Pitch 14563042  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
28 AWG, 0.76 $\mu$ m  
Gold (Au), 4 Circuits

|  |                 |
|--|-----------------|
| 2.54mm Pitch   | <u>14563043</u> |
| SL Insulation<br>Displacement<br>Connector Assembly,<br>Female, Single Row,<br>Version G, Positive<br>Lock, Wire Size 28<br>AWG, 0.76µm Gold<br>(Au), 4 Circuits |                 |
| 2.54mm Pitch   | <u>14563044</u> |
| SL Insulation<br>Displacement<br>Connector Assembly,<br>Female, Single Row,<br>Version D, Back<br>Ribs, Wire Size 24<br>AWG, 0.38µm Gold<br>(Au), 4 Circuits     |                 |
| 2.54mm Pitch   | <u>14563045</u> |
| SL Insulation<br>Displacement<br>Connector Assembly,<br>Female, Single Row,<br>Version C, Front<br>Ribs, Wire Size 24<br>AWG, 0.38µm Gold<br>(Au), 4 Circuits    |                 |
| 2.54mm Pitch   | <u>14563046</u> |
| SL Insulation<br>Displacement<br>Connector Assembly,<br>Female, Single Row,<br>Version C, Front<br>Ribs, Wire Size 26<br>AWG, 0.38µm Gold<br>(Au), 4 Circuits    |                 |
| 2.54mm Pitch   | <u>14563047</u> |
| SL Insulation<br>Displacement<br>Connector Assembly,<br>Female, Single Row,<br>Version D, Back<br>Ribs, Wire Size 26<br>AWG, 0.38µm Gold<br>(Au), 4 Circuits     |                 |
| 2.54mm Pitch   | <u>14563048</u> |
| SL Insulation<br>Displacement<br>Connector Assembly,<br>Female, Single Row,<br>Version C, Front<br>Ribs, Wire Size 28<br>AWG, 0.38µm Gold<br>(Au), 4 Circuits    |                 |
| 2.54mm Pitch   | <u>14563049</u> |
| SL Insulation<br>Displacement<br>Connector Assembly,<br>Female, Single Row,<br>Version D, Back<br>Ribs, Wire Size 28<br>AWG, 0.38µm Gold<br>(Au), 4 Circuits     |                 |
| 2.54mm Pitch   | <u>14563051</u> |
| SL Insulation  |                 |

Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 5 Circuits  
2.54mm Pitch 14563052  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
28 AWG, 0.76µm  
Gold (Au), 5 Circuits  
2.54mm Pitch 14563053  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 5 Circuits  
2.54mm Pitch 14563054  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 5 Circuits  
2.54mm Pitch 14563055  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 5 Circuits  
2.54mm Pitch 14563056  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 5 Circuits  
2.54mm Pitch 14563057  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 5 Circuits  
2.54mm Pitch 14563058  
SL Insulation

Displacement  
Connector Assembly,

Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.38µm Gold  
(Au), 5 Circuits  
2.54mm Pitch 14563059  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.38µm Gold  
(Au), 5 Circuits  
2.54mm Pitch 14563061  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 6 Circuits  
2.54mm Pitch 14563062  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
28 AWG, 0.76µm  
Gold (Au), 6 Circuits  
2.54mm Pitch 14563063  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 6 Circuits  
2.54mm Pitch 14563064  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 6 Circuits  
2.54mm Pitch 14563065  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 6 Circuits  
2.54mm Pitch 14563066  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front

Ribs, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 6 Circuits  
2.54mm Pitch 14563067  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 6 Circuits  
2.54mm Pitch 14563068  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 6 Circuits  
2.54mm Pitch 14563069  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 6 Circuits  
2.54mm Pitch 14563071  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.76 $\mu$ m Gold  
(Au), 7 Circuits  
2.54mm Pitch 14563072  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
28 AWG, 0.76 $\mu$ m  
Gold (Au), 7 Circuits  
2.54mm Pitch 14563073  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.76 $\mu$ m Gold  
(Au), 7 Circuits  
2.54mm Pitch 14563074  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24

AWG, 0.38 $\mu$ m Gold  
(Au), 7 Circuits  
2.54mm Pitch 14563075  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.38 $\mu$ m Gold  
(Au), 7 Circuits  
2.54mm Pitch 14563076  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 7 Circuits  
2.54mm Pitch 14563077  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 7 Circuits  
2.54mm Pitch 14563078  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 7 Circuits  
2.54mm Pitch 14563081  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.76 $\mu$ m Gold  
(Au), 8 Circuits  
2.54mm Pitch 14563082  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
28 AWG, 0.76 $\mu$ m  
Gold (Au), 8 Circuits  
2.54mm Pitch 14563083  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.76 $\mu$ m Gold  
(Au), 8 Circuits

2.54mm Pitch 14563084  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 8 Circuits

2.54mm Pitch 14563085  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 8 Circuits

2.54mm Pitch 14563086  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 8 Circuits

2.54mm Pitch 14563087  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 8 Circuits

2.54mm Pitch 14563088  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.38µm Gold  
(Au), 8 Circuits

2.54mm Pitch 14563089  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.38µm Gold  
(Au), 8 Circuits

2.54mm Pitch 14563091  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 9 Circuits

2.54mm Pitch 14563092  
SL Insulation



Displacement  
Connector Assembly,  
Female, Single Row,  
Version A, Non-  
polarized, Wire Size  
28 AWG, 0.76µm  
Gold (Au), 9 Circuits  
2.54mm Pitch 14563093  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 9 Circuits  
2.54mm Pitch 14563094  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 9 Circuits  
2.54mm Pitch 14563095  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 9 Circuits  
2.54mm Pitch 14563096  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 9 Circuits  
2.54mm Pitch 14563097  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 9 Circuits  
2.54mm Pitch 14563098  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.38µm Gold  
(Au), 9 Circuits  
2.54mm Pitch 14563099  
SL Insulation

Displacement  
Connector Assembly,

Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 9 Circuits  
2.54mm Pitch 14563101  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.76 $\mu$ m Gold  
(Au), 10 Circuits  
2.54mm Pitch 14563102  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.76 $\mu$ m Gold (Au),  
10 Circuits  
2.54mm Pitch 14563103  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.76 $\mu$ m Gold  
(Au), 10 Circuits  
2.54mm Pitch 14563104  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.38 $\mu$ m Gold  
(Au), 10 Circuits  
2.54mm Pitch 14563105  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.38 $\mu$ m Gold  
(Au), 10 Circuits  
2.54mm Pitch 14563106  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 10 Circuits  
2.54mm Pitch 14563107  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,

Version D, Back  
Ribs, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 10 Circuits  
2.54mm Pitch 14563108  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 10 Circuits  
2.54mm Pitch 14563109  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 10 Circuits  
2.54mm Pitch 14563111  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.76 $\mu$ m Gold  
(Au), 11 Circuits  
2.54mm Pitch 14563112  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.76 $\mu$ m Gold (Au),  
11 Circuits  
2.54mm Pitch 14563113  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.76 $\mu$ m Gold  
(Au), 11 Circuits  
2.54mm Pitch 14563114  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.38 $\mu$ m Gold  
(Au), 11 Circuits  
2.54mm Pitch 14563115  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front

Ribs, Wire Size 24  
AWG, 0.38 $\mu$ m Gold  
(Au), 11 Circuits  
2.54mm Pitch 14563116  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front

Ribs, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 11 Circuits  
2.54mm Pitch 14563117  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back

Ribs, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 11 Circuits  
2.54mm Pitch 14563118  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front

Ribs, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 11 Circuits  
2.54mm Pitch 14563119  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back

Ribs, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 11 Circuits  
2.54mm Pitch 14563121  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive

Lock, Wire Size 26  
AWG, 0.76 $\mu$ m Gold  
(Au), 12 Circuits  
2.54mm Pitch 14563122  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.76 $\mu$ m Gold (Au),  
12 Circuits

2.54mm Pitch 14563123  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28

AWG, 0.76 $\mu$ m Gold  
(Au), 12 Circuits  
2.54mm Pitch 14563124  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.38 $\mu$ m Gold  
(Au), 12 Circuits  
2.54mm Pitch 14563125  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.38 $\mu$ m Gold  
(Au), 12 Circuits  
2.54mm Pitch 14563126  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 12 Circuits  
2.54mm Pitch 14563127  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 12 Circuits  
2.54mm Pitch 14563128  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 12 Circuits  
2.54mm Pitch 14563129  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 12 Circuits  
2.54mm Pitch 14563131  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.76 $\mu$ m Gold  
(Au), 13 Circuits

2.54mm Pitch [14563132](#)

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.76µm Gold (Au),  
13 Circuits

2.54mm Pitch [14563133](#)

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 13 Circuits

2.54mm Pitch [14563134](#)

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 13 Circuits

2.54mm Pitch [14563135](#)

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 13 Circuits

2.54mm Pitch [14563136](#)

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 13 Circuits

2.54mm Pitch [14563137](#)

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 13 Circuits

2.54mm Pitch [14563138](#)

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.38µm Gold  
(Au), 13 Circuits

2.54mm Pitch 14563139

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 13 Circuits

2.54mm Pitch 14563141

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.76 $\mu$ m Gold  
(Au), 14 Circuits

2.54mm Pitch 14563142

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.76 $\mu$ m Gold (Au),  
14 Circuits

2.54mm Pitch 14563143

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.76 $\mu$ m Gold  
(Au), 14 Circuits

2.54mm Pitch 14563144

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.38 $\mu$ m Gold  
(Au), 14 Circuits

2.54mm Pitch 14563145

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.38 $\mu$ m Gold  
(Au), 14 Circuits

2.54mm Pitch 14563146

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 14 Circuits

2.54mm Pitch 14563147

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 14 Circuits

2.54mm Pitch 14563148

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 14 Circuits

2.54mm Pitch 14563149

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 14 Circuits

2.54mm Pitch 14563151

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.76 $\mu$ m Gold  
(Au), 15 Circuits

2.54mm Pitch 14563152

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.76 $\mu$ m Gold (Au),  
15 Circuits

2.54mm Pitch 14563153

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.76 $\mu$ m Gold  
(Au), 15 Circuits

2.54mm Pitch 14563154

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.38 $\mu$ m Gold  
(Au), 15 Circuits



2.54mm Pitch 14563155  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 15 Circuits

2.54mm Pitch 14563156  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 15 Circuits

2.54mm Pitch 14563157  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 15 Circuits

2.54mm Pitch 14563158  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.38µm Gold  
(Au), 15 Circuits

2.54mm Pitch 14563159  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.38µm Gold  
(Au), 15 Circuits

2.54mm Pitch 14563161  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 16 Circuits

2.54mm Pitch 14563162  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.76µm Gold (Au),  
16 Circuits

2.54mm Pitch 14563163  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 16 Circuits

2.54mm Pitch 14563164  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 16 Circuits

2.54mm Pitch 14563165  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 16 Circuits

2.54mm Pitch 14563166  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 16 Circuits

2.54mm Pitch 14563167  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 16 Circuits

2.54mm Pitch 14563168  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.38µm Gold  
(Au), 16 Circuits

2.54mm Pitch 14563169  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.38µm Gold  
(Au), 16 Circuits

2.54mm Pitch 14563171  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 17 Circuits  
2.54mm Pitch 14563172  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.76µm Gold (Au),  
17 Circuits  
2.54mm Pitch 14563173  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 17 Circuits  
2.54mm Pitch 14563174  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 17 Circuits  
2.54mm Pitch 14563175  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 17 Circuits  
2.54mm Pitch 14563176  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 17 Circuits  
2.54mm Pitch 14563177  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 17 Circuits  
2.54mm Pitch 14563178  
SL Insulation

Displacement

Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.38µm Gold  
(Au), 17 Circuits  
2.54mm Pitch 14563179  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.38µm Gold  
(Au), 17 Circuits  
2.54mm Pitch 14563181  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 18 Circuits  
2.54mm Pitch 14563182  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.76µm Gold (Au),  
18 Circuits  
2.54mm Pitch 14563183  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 18 Circuits  
2.54mm Pitch 14563184  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 18 Circuits  
2.54mm Pitch 14563185  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 18 Circuits  
2.54mm Pitch 14563186  
SL Insulation  
Displacement  
Connector Assembly,

Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 18 Circuits  
2.54mm Pitch 14563187  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 18 Circuits  
2.54mm Pitch 14563188  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 18 Circuits  
2.54mm Pitch 14563189  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 18 Circuits  
2.54mm Pitch 14563191  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.76 $\mu$ m Gold  
(Au), 19 Circuits  
2.54mm Pitch 14563192  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.76 $\mu$ m Gold (Au),  
19 Circuits  
2.54mm Pitch 14563193  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.76 $\mu$ m Gold  
(Au), 19 Circuits  
2.54mm Pitch 14563194  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,

Version D, Back  
Ribs, Wire Size 24  
AWG, 0.38 $\mu$ m Gold  
(Au), 19 Circuits  
2.54mm Pitch 14563195  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.38 $\mu$ m Gold  
(Au), 19 Circuits  
2.54mm Pitch 14563196  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 19 Circuits  
2.54mm Pitch 14563197  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 19 Circuits  
2.54mm Pitch 14563198  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 19 Circuits  
2.54mm Pitch 14563199  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 19 Circuits  
2.54mm Pitch 14563201  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.76 $\mu$ m Gold  
(Au), 20 Circuits  
2.54mm Pitch 14563202  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,

Wire Size 28 AWG,  
0.76µm Gold (Au),  
20 Circuits  
2.54mm Pitch 14563203  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 20 Circuits  
2.54mm Pitch 14563204  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 20 Circuits  
2.54mm Pitch 14563205  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 20 Circuits  
2.54mm Pitch 14563206  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 20 Circuits  
2.54mm Pitch 14563207  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 20 Circuits  
2.54mm Pitch 14563208  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.38µm Gold  
(Au), 20 Circuits  
2.54mm Pitch 14563209  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28

AWG, 0.38 $\mu$ m Gold  
(Au), 20 Circuits  
2.54mm Pitch 14563211  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.76 $\mu$ m Gold  
(Au), 21 Circuits  
2.54mm Pitch 14563212  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.76 $\mu$ m Gold (Au),  
21 Circuits  
2.54mm Pitch 14563213  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.76 $\mu$ m Gold  
(Au), 21 Circuits  
2.54mm Pitch 14563214  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.38 $\mu$ m Gold  
(Au), 21 Circuits  
2.54mm Pitch 14563215  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.38 $\mu$ m Gold  
(Au), 21 Circuits  
2.54mm Pitch 14563216  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 21 Circuits  
2.54mm Pitch 14563217  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26



AWG, 0.38 $\mu$ m Gold  
(Au), 21 Circuits  
2.54mm Pitch 14563218  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 21 Circuits  
2.54mm Pitch 14563219  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 21 Circuits  
2.54mm Pitch 14563221  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.76 $\mu$ m Gold  
(Au), 22 Circuits  
2.54mm Pitch 14563222  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.76 $\mu$ m Gold (Au),  
22 Circuits  
2.54mm Pitch 14563223  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.76 $\mu$ m Gold  
(Au), 22 Circuits  
2.54mm Pitch 14563224  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.38 $\mu$ m Gold  
(Au), 22 Circuits  
2.54mm Pitch 14563225  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24

AWG, 0.38 $\mu$ m Gold  
(Au), 22 Circuits  
2.54mm Pitch 14563226  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 22 Circuits  
2.54mm Pitch 14563227  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 22 Circuits  
2.54mm Pitch 14563228  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 22 Circuits  
2.54mm Pitch 14563229  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 22 Circuits  
2.54mm Pitch 14563231  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.76 $\mu$ m Gold  
(Au), 23 Circuits  
2.54mm Pitch 14563232  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.76 $\mu$ m Gold (Au),  
23 Circuits  
2.54mm Pitch 14563233  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28

AWG, 0.76µm Gold  
(Au), 23 Circuits  
2.54mm Pitch 14563234  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 23 Circuits  
2.54mm Pitch 14563235  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 23 Circuits  
2.54mm Pitch 14563236  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 23 Circuits  
2.54mm Pitch 14563237  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 23 Circuits  
2.54mm Pitch 14563238  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.38µm Gold  
(Au), 23 Circuits  
2.54mm Pitch 14563239  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.38µm Gold  
(Au), 23 Circuits  
2.54mm Pitch 14563241  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 24 Circuits

2.54mm Pitch 14563242  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.76µm Gold (Au),  
24 Circuits

2.54mm Pitch 14563243  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 24 Circuits

2.54mm Pitch 14563244  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 24 Circuits

2.54mm Pitch 14563245  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.38µm Gold  
(Au), 24 Circuits

2.54mm Pitch 14563246  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 24 Circuits

2.54mm Pitch 14563247  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.38µm Gold  
(Au), 24 Circuits

2.54mm Pitch 14563248  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.38µm Gold  
(Au), 24 Circuits

2.54mm Pitch 14563249

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 24 Circuits

2.54mm Pitch 14563251

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 26  
AWG, 0.76 $\mu$ m Gold  
(Au), 25 Circuits

2.54mm Pitch 14563252

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single  
Row, Version A,  
Non-polarized,  
Wire Size 28 AWG,  
0.76 $\mu$ m Gold (Au),  
25 Circuits

2.54mm Pitch 14563253

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version G, Positive  
Lock, Wire Size 28  
AWG, 0.76 $\mu$ m Gold  
(Au), 25 Circuits

2.54mm Pitch 14563254

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.38 $\mu$ m Gold  
(Au), 25 Circuits

2.54mm Pitch 14563257

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.38 $\mu$ m Gold  
(Au), 25 Circuits

2.54mm Pitch 14563259

SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.38 $\mu$ m Gold  
(Au), 25 Circuits

2.54mm Pitch 14564020  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 2 Circuits

2.54mm Pitch 14564021  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 2 Circuits

2.54mm Pitch 14564022  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 2 Circuits

2.54mm Pitch 14564023  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 2 Circuits

2.54mm Pitch 14564024  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 2 Circuits

2.54mm Pitch 14564025  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 2 Circuits

2.54mm Pitch 14564030  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 3 Circuits

2.54mm Pitch 14564031  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 3 Circuits  
2.54mm Pitch 14564032  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 3 Circuits  
2.54mm Pitch 14564033  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 3 Circuits  
2.54mm Pitch 14564034  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 3 Circuits  
2.54mm Pitch 14564035  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 3 Circuits  
2.54mm Pitch 14564040  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 4 Circuits  
2.54mm Pitch 14564041  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 4 Circuits  
2.54mm Pitch 14564042  
SL Insulation

Displacement  
Connector Assembly,

Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 4 Circuits  
2.54mm Pitch 14564043  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 4 Circuits  
2.54mm Pitch 14564044  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 4 Circuits  
2.54mm Pitch 14564045  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 4 Circuits  
2.54mm Pitch 14564050  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 5 Circuits  
2.54mm Pitch 14564051  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 5 Circuits  
2.54mm Pitch 14564052  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 5 Circuits  
2.54mm Pitch 14564053  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back



Ribs, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 5 Circuits  
2.54mm Pitch 14564054  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 5 Circuits  
2.54mm Pitch 14564055  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 5 Circuits  
2.54mm Pitch 14564060  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 6 Circuits  
2.54mm Pitch 14564061  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 6 Circuits  
2.54mm Pitch 14564062  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 6 Circuits  
2.54mm Pitch 14564063  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 6 Circuits  
2.54mm Pitch 14564064  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28

AWG, 0.76µm Gold  
(Au), 6 Circuits  
2.54mm Pitch 14564065  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 6 Circuits  
2.54mm Pitch 14564070  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 7 Circuits  
2.54mm Pitch 14564071  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 7 Circuits  
2.54mm Pitch 14564072  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 7 Circuits  
2.54mm Pitch 14564073  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 7 Circuits  
2.54mm Pitch 14564074  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 7 Circuits  
2.54mm Pitch 14564075  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 7 Circuits

2.54mm Pitch 14564080  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 8 Circuits

2.54mm Pitch 14564081  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 8 Circuits

2.54mm Pitch 14564082  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 8 Circuits

2.54mm Pitch 14564083  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 8 Circuits

2.54mm Pitch 14564084  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 8 Circuits

2.54mm Pitch 14564085  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 8 Circuits

2.54mm Pitch 14564090  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 9 Circuits

2.54mm Pitch 14564091  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 9 Circuits  
2.54mm Pitch 14564092  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 9 Circuits  
2.54mm Pitch 14564093  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 9 Circuits  
2.54mm Pitch 14564094  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 9 Circuits  
2.54mm Pitch 14564095  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 9 Circuits  
2.54mm Pitch 14564100  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 10 Circuits  
2.54mm Pitch 14564101  
SL Insulation

Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 10 Circuits  
2.54mm Pitch 14564102  
SL Insulation

Displacement  
Connector Assembly,

Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 10 Circuits  
2.54mm Pitch 14564103  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 10 Circuits  
2.54mm Pitch 14564104  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 10 Circuits  
2.54mm Pitch 14564105  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 10 Circuits  
2.54mm Pitch 14564110  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 11 Circuits  
2.54mm Pitch 14564111  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 11 Circuits  
2.54mm Pitch 14564112  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 11 Circuits  
2.54mm Pitch 14564113  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back

Ribs, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 11 Circuits  
2.54mm Pitch 14564114  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 11 Circuits  
2.54mm Pitch 14564115  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 11 Circuits  
2.54mm Pitch 14564120  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 12 Circuits  
2.54mm Pitch 14564121  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 12 Circuits  
2.54mm Pitch 14564122  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 12 Circuits  
2.54mm Pitch 14564123  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 12 Circuits  
2.54mm Pitch 14564124  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28

AWG, 0.76µm Gold  
(Au), 12 Circuits  
2.54mm Pitch 14564125  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 12 Circuits  
2.54mm Pitch 14564130  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 13 Circuits  
2.54mm Pitch 14564131  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 24  
AWG, 0.76µm Gold  
(Au), 13 Circuits  
2.54mm Pitch 14564132  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 13 Circuits  
2.54mm Pitch 14564133  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 26  
AWG, 0.76µm Gold  
(Au), 13 Circuits  
2.54mm Pitch 14564134  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version C, Front  
Ribs, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 13 Circuits  
2.54mm Pitch 14564135  
SL Insulation  
Displacement  
Connector Assembly,  
Female, Single Row,  
Version D, Back  
Ribs, Wire Size 28  
AWG, 0.76µm Gold  
(Au), 13 Circuits

|                     |                 |
|---------------------|-----------------|
| 2.54mm Pitch        | <u>14564140</u> |
| SL Insulation       |                 |
| Displacement        |                 |
| Connector Assembly, |                 |
| Female, Single Row, |                 |
| Version C, Front    |                 |
| Ribs, Wire Size 24  |                 |
| AWG, 0.76µm Gold    |                 |
| (Au), 14 Circuits   |                 |
| 2.54mm Pitch        | <u>14564141</u> |
| SL Insulation       |                 |
| Displacement        |                 |
| Connector Assembly, |                 |
| Female, Single Row, |                 |
| Version D, Back     |                 |
| Ribs, Wire Size 24  |                 |
| AWG, 0.76µm Gold    |                 |
| (Au), 14 Circuits   |                 |
| 2.54mm Pitch        | <u>14564142</u> |
| SL Insulation       |                 |
| Displacement        |                 |
| Connector Assembly, |                 |
| Female, Single Row, |                 |
| Version C, Front    |                 |
| Ribs, Wire Size 26  |                 |
| AWG, 0.76µm Gold    |                 |
| (Au), 14 Circuits   |                 |
| 2.54mm Pitch        | <u>14564143</u> |
| SL Insulation       |                 |
| Displacement        |                 |
| Connector Assembly, |                 |
| Female, Single Row, |                 |
| Version D, Back     |                 |
| Ribs, Wire Size 26  |                 |
| AWG, 0.76µm Gold    |                 |
| (Au), 14 Circuits   |                 |
| 2.54mm Pitch        | <u>14564144</u> |
| SL Insulation       |                 |
| Displacement        |                 |
| Connector Assembly, |                 |
| Female, Single Row, |                 |
| Version C, Front    |                 |
| Ribs, Wire Size 28  |                 |
| AWG, 0.76µm Gold    |                 |
| (Au), 14 Circuits   |                 |

This document was generated on 11/02/2021

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Crimpers / Crimping Tools](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[010-0096](#) [M225202-37](#) [6-1579015-5](#) [CT150-2-D02](#) [622-6441LF](#) [M322](#) [6-304052-1](#) [63456-0054](#) [63484-3701](#) [63800-8355](#) [63819-1875](#)  
[63819-2875](#) [63819-4475](#) [63823-3475](#) [63827-5375](#) [64001-0975](#) [64001-4175](#) [64005-0175](#) [662903-2](#) [690602-6](#) [7-1579001-9](#) [7-23471-1](#)  
[762637-1](#) [808714-1](#) [811242-5](#) [999-50-020083](#) [1-21002-3](#) [1-21002-7](#) [12085270](#) [1-21002-6](#) [1-21113-6](#) [1-22548-4](#) [125442-1](#)  
[DCE.91.073.BVC](#) [DCE.91.090.3MVM](#) [DCE.91.130.5MVU](#) [DCE.91.202.BVCM](#) [1338300-1](#) [1-354003-0](#) [1338301-1](#) [DF62/RE-MD](#) [142321](#)  
[1456088-1](#) [1490794-1](#) [1-45804-6](#) [1490357-2](#) [1490357-3](#) [AX100749](#) [1-59619-7](#) [1596970-1](#)