


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0643231029**
Status: **Active**
Overview: CMC and CMX Sealed, Hybrid, Modular Connectors
Description: 1.50mm CMC CP Female Terminal, Tin Plated, for Tab Ddimensions 1.50mm x 0.80mm, Wire Size 0.50mm² - 1.0mm²

Documents:

3D Model	Application Specification AS-64323-001-CH-001 (PDF)
Drawing (PDF)	Application Specification AS-64323-001-FR-001 (PDF)
3D Model (PDF)	Application Specification AS-98420-001-001 (PDF)
Product Specification PS-64319-002-001 (PDF)	Application Specification AS-98420-001-CH-001 (PDF)
Application Specification AS-64318-002-001 (PDF)	Application Specification AS-98420-001-FR-001 (PDF)
Application Specification AS-64318-002-CH-001 (PDF)	Application Specification AS-98420-001-SP-001 (PDF)
Application Specification AS-64318-002-FR-001 (PDF)	Application Specification AS-98420-002-001 (PDF)
Application Specification AS-64318-002-SP-001 (PDF)	Application Specification AS-98420-002-CH-001 (PDF)
Application Specification AS-64319-002-001 (PDF)	Application Specification AS-98420-002-FR-001 (PDF)
Application Specification AS-64319-002-CH-001 (PDF)	Application Specification AS-98420-002-SP-001 (PDF)
Application Specification AS-64319-002-FR-001 (PDF)	Packaging Specification PK-98915-001-001 (PDF)
Application Specification AS-64319-002-SP-001 (PDF)	RoHS Certificate of Compliance (PDF)
Application Specification AS-64323-001-001 (PDF)	

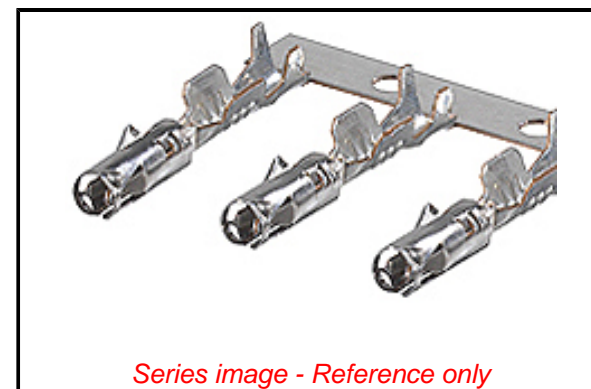

EU ELV
Compliant

EU RoHS
Compliant
REACH SVHC

Not Contained Per -
D(2021)4569-DC (8
July 2021)

Halogen-Free
Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS
ELV
RoHS Phthalates

China RoHS

Green Image
Compliant
Not Contained

General

Product Family	Crimp Terminals
Series	64323
Application	Automotive, Power, Wire-to-Wire
Comments	* Current tested on a fully loaded connector, current for temperature increase of 40°C. Current max = 12A for 1.50mm Terminal (2.00mm ² wire)*
Crimp Quality Equipment	Yes
Overview	CMC and CMX Sealed, Hybrid, Modular Connectors
Product Name	CMC, CP Terminal
UPC	883906129583

Physical

Gender	Female
Material - Metal	High Copper Alloy
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Net Weight	0.340/g
Packaging Type	Reel
Plating min - Mating	1.524µm, 3.048µm
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.40mm-2.15mm
Wire Size AWG	18, 20
Wire Size mm ²	0.50-1.00

Search Parts in this Series

64323 Series

Use With

CMC Connector [64318](#) , [64319](#) , [64320](#) , [64321](#) , [64326](#)

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
PremiumGrade Hand Crimp Tool for CP 1.50mm Female Terminals for CMC Connector, 1.00-0.50mm ² Wire Extraction Tool for 1.50mm CP Crimp Terminals for CMC Connector	638118900
	638132300

Electrical

Current - Maximum per Contact 12.0A
Voltage - Maximum 14V DC

Solder Process Data

Lead-freeProcess Capability N/A

Material Info**Reference - Drawing Numbers**

Application Specification AS-64318-002-001, AS-64318-002-CH-001,
AS-64318-002-FR-001, AS-64318-002-SP-001,
AS-64319-002-001, AS-64319-002-CH-001,
AS-64319-002-FR-001, AS-64319-002-SP-001,
AS-64323-001-001, AS-64323-001-CH-001,
AS-64323-001-FR-001, AS-98420-001-001,
AS-98420-001-CH-001, AS-98420-001-FR-001,
AS-98420-001-SP-001, AS-98420-002-001,
AS-98420-002-CH-001, AS-98420-002-FR-001,
AS-98420-002-SP-001
Crimp Specification CS-64323-001-001
Packaging Specification PK-98915-001-001
Product Specification PS-64319-002-001
Sales Drawing SD-64323-001-000

This document was generated on 02/02/2022

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Automotive Connectors](#) category:

Click to view products by [Molex](#) manufacturer:

Other Similar products are found below :

[003-018-000](#) [60403001](#) [60993906-B](#) [M902-2131](#) [M902-2161](#) [72.330.1035.1](#) [73.353.4028.0](#) [F119300-B](#) [F166900](#) [F258300-B](#) [F358300-B](#)
[F407400](#) [F444110](#) [F487000](#) [F509500B-B](#) [827153-1](#) [8N1515-32-24P](#) [9-1326729-8](#) [925474-1](#) [928905-1](#) [964562-4](#) [968782-1](#) [GT17SA-8DS-](#)
[HU](#) [98891-1012](#) [98947-1016](#) [12004475-L](#) [12010290](#) [12010309-B](#) [12015454](#) [12020219-B](#) [12020308](#) [12041318-B](#) [12052225-L](#) [12052466](#)
[12059125](#) [12064869](#) [12004327-B](#) [12010503-B](#) [12015308](#) [12015384](#) [12015909](#) [1-21030-1](#) [12041254](#) [12041318](#) [12047946-B](#) [12047957](#)
[12047957-L](#) [12059473](#) [12066261](#) [12110546](#)