


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0670689000](#)  
**Status:** **Active**  
**Overview:** USB Connectors: USB Type-A, USB Type-B, and USB Type-C Plugs and Receptacles  
**Description:** Universal Serial Bus (USB) Shielded I/O Type B Receptacle, Right-Angle, with Kinked Solder Tabs, Color White, Gold (Au) Flash Plating, Tray Pack, Lead-Free

**Documents:**

|                                                               |                                                                |
|---------------------------------------------------------------|----------------------------------------------------------------|
| <a href="#">Drawing (PDF)</a>                                 | <a href="#">Packaging Specification PK-67068-001-001 (PDF)</a> |
| <a href="#">3D Model</a>                                      | <a href="#">Test Summary TS-67068-001-001 (PDF)</a>            |
| <a href="#">3D Model (PDF)</a>                                | <a href="#">RoHS Certificate of Compliance (PDF)</a>           |
| <a href="#">Product Specification PS-67998-0000-001 (PDF)</a> |                                                                |

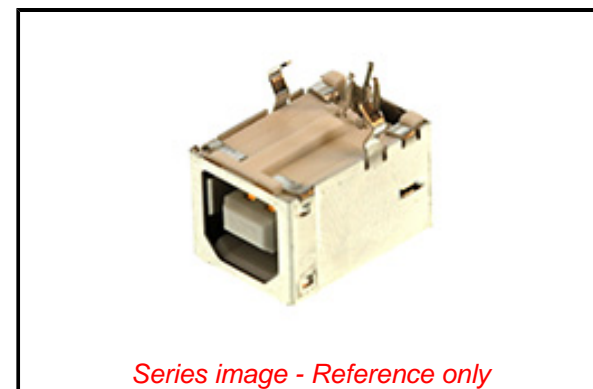

**Agency Certification**

|     |         |
|-----|---------|
| CSA | LR19980 |
| UL  | E29179  |

**General**

|                |                                                                                              |
|----------------|----------------------------------------------------------------------------------------------|
| Product Family | I/O Connectors                                                                               |
| Series         | <a href="#">67068</a>                                                                        |
| Application    | Wire-to-Board                                                                                |
| Comments       | Single                                                                                       |
| Component Type | Receptacle                                                                                   |
| Overview       | <a href="#">USB Connectors: USB Type-A, USB Type-B, and USB Type-C Plugs and Receptacles</a> |
| Product Name   | USB                                                                                          |
| Standard       | USB 2.0                                                                                      |
| Type           | B                                                                                            |
| UPC            | 822348723041                                                                                 |

**Physical**

|                                |             |
|--------------------------------|-------------|
| Circuits (Loaded)              | 4           |
| Circuits (maximum)             | 4           |
| Color - Resin                  | White       |
| Flammability                   | 94V-0       |
| Gender                         | Female      |
| Lock to Mating Part            | Yes         |
| Material - Plating Mating      | Gold        |
| Material - Plating Termination | Tin         |
| Material - Resin               | Polyester   |
| Mounting Style                 | Top-Mount   |
| Net Weight                     | 0.280/g     |
| Number of Rows                 | 2           |
| Orientation                    | Right Angle |
| PC Tail Length                 | 2.80mm      |
| PCB Locator                    | Yes         |
| PCB Retention                  | Yes         |
| PCB Thickness - Recommended    | 1.60mm      |
| Packaging Type                 | Tray        |
| Panel Mount                    | No          |
| Pitch - Mating Interface       | 2.50mm      |
| Pitch - Termination Interface  | 2.50mm      |
| Plating min - Mating           | 0.051µm     |
| Plating min - Termination      | 1.905µm     |
| Polarized to Mating Part       | Yes         |
| Polarized to PCB               | Yes         |
| Ports                          | 1           |
| Surface Mount Compatible (SMC) | Yes         |

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2021)4569-DC (8  
July 2021)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[67068 Series](#)

**Mates With**

USB Type B Plug

|                               |              |
|-------------------------------|--------------|
| Temperature Range - Operating | 0° to +50°C  |
| Termination Interface: Style  | Through Hole |
| Waterproof / Dustproof        | No           |
| Wire Size AWG                 | N/A          |

**Electrical**

|                               |             |
|-------------------------------|-------------|
| Current - Maximum per Contact | 1.5A        |
| Shield Type                   | Full Shield |
| Shielded                      | Yes         |
| Voltage - Maximum             | 30V (RMS)   |

**Solder Process Data**

|                              |      |
|------------------------------|------|
| Lead-free Process Capability | WAVE |
| Process Temperature max. C   | 260  |

**Material Info****Reference - Drawing Numbers**

|                         |                                                                                                |
|-------------------------|------------------------------------------------------------------------------------------------|
| Packaging Specification | PK-67068-001-001                                                                               |
| Product Specification   | PS-67998-0000-001                                                                              |
| Sales Drawing           | SD-67068-003-001, SD-67068-003-002,<br>SD-67068-003-003, SD-67068-003-004,<br>SD-67068-004-001 |
| Test Summary            | TS-67068-001-001                                                                               |

This document was generated on 12/27/2021

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [USB Connectors](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[65-647-8-BK-BU](#) [950](#) [952](#) [E8144-B01021-L](#) [A-USB A-LP-SMT-C](#) [MUSBA511N5](#) [MUSBD11135](#) [217450-1](#) [CA 6 W LD](#) [KMBVX-TH-5S-B30](#) [896-30-004-00-000000](#) [KUSBVX-BS1N-W30](#) [KUSBX-AP-KIT-SCBLK](#) [KUSBX-AS2N-W](#) [KUSBX-SMT2AP1S-W](#) [KUSBX-SMT2AP1S-W30](#) [935](#) [957](#) [30-498-6](#) [17-210051](#) [1734082-1](#) [30-1574](#) [30-470](#) [30-489](#) [30-541](#) [30-572-3](#) [MAB 8 SN V](#) [A-USB A-2P-C](#) [MIKROE-1451](#) [USBFTV2PEM2G](#) [USBFTVC6ZN](#) [KUSBX-AS2N-W30](#) [KUSBX-SLAS1N-W](#) [KUSBX-SMT-AS1N-W30](#) [4689-1](#) [1-1734084-2](#) [E8110-001-01](#) [MUSBA81130](#) [33UBARS1-04SW11](#) [33UBAR-04SW11](#) [USBF21ZNSCC](#) [USBBFTV6ZC](#) [10135326-001LF](#) [M9177/3-1](#) [USB-A-S-F-B-VT](#) [925](#) [4198](#) [690-024-633-031](#) [KUSBEX-BSFS1N-W](#) [USBFTVC6MRG](#)