


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0705450048](#)  
**Status:** **Active**  
**Overview:** [SL Modular Connectors](#)  
**Description:** 2.54mm Pitch SL Header, Single Row 3.05mm Pocket Vertical, Shrouded, with Press-fit Plastic Peg, 14 Circuits, 0.38µm Gold (Au) Selective Plating, Tin (Sn) PC Tail Plating

**Documents:**

|  |   |
|--|---|
| <a href="#">3D Model</a>                                 | <a href="#">Product Specification PS-70541-001 (PDF)</a>        |
| <a href="#">3D Model (PDF)</a>                           | <a href="#">Packaging Specification PK-70873-0014-001 (PDF)</a> |
| <a href="#">Drawing (PDF)</a>                            | <a href="#">Test Summary TS-70541-100-001 (PDF)</a>             |
| <a href="#">Product Specification PS-70400-001 (PDF)</a> | <a href="#">RoHS Certificate of Compliance (PDF)</a>            |

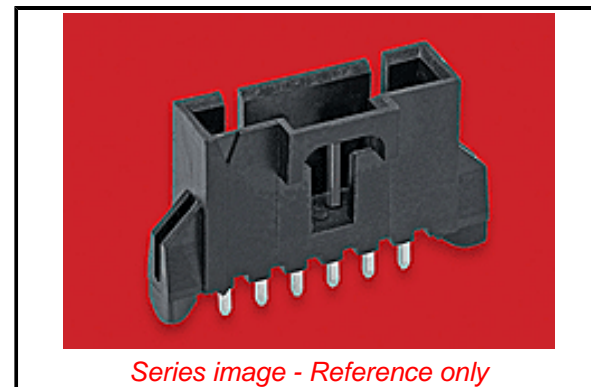

*Series image - Reference only*

**Agency Certification**

|     |         |
|-----|---------|
| CSA | LR19980 |
| UL  | E29179  |

**General**

|                |                                       |
|----------------|---------------------------------------|
| Product Family | PCB Headers                           |
| Series         | <a href="#">70545</a>                 |
| Application    | Signal, Wire-to-Board                 |
| Overview       | <a href="#">SL Modular Connectors</a> |
| Product Name   | SL                                    |
| UPC            | 800753597730                          |

**Physical**

|                                |                                |
|--------------------------------|--------------------------------|
| Breakaway                      | No                             |
| Circuits (Loaded)              | 14                             |
| Circuits (maximum)             | 14                             |
| Color - Resin                  | Black                          |
| Durability (mating cycles max) | 50                             |
| Flammability                   | 94V-0                          |
| Glow-Wire Capable              | No                             |
| Lock to Mating Part            | Yes                            |
| Material - Metal               | Brass, Phosphor Bronze         |
| Material - Plating Mating      | Gold                           |
| Material - Plating Termination | Tin                            |
| Material - Resin               | High Temperature Thermoplastic |
| Net Weight                     | 2.775/g                        |
| Number of Rows                 | 1                              |
| Orientation                    | Vertical                       |
| PC Tail Length                 | 3.30mm                         |
| PCB Locator                    | Yes                            |
| PCB Retention                  | Yes                            |
| PCB Thickness - Recommended    | 1.60mm                         |
| Packaging Type                 | Tube                           |
| Pitch - Mating Interface       | 2.54mm                         |
| Plating min - Mating           | 0.381µm                        |
| Plating min - Termination      | 1.905µm                        |
| Polarized to Mating Part       | Yes                            |
| Shrouded                       | Fully                          |
| Stackable                      | No                             |
| Surface Mount Compatible (SMC) | Yes                            |
| Temperature Range - Operating  | -40° to +105°C                 |
| Termination Interface: Style   | Through Hole                   |

**Electrical**

|                               |      |
|-------------------------------|------|
| Current - Maximum per Contact | 3.0A |
|-------------------------------|------|

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2021)4569-DC (8  
July 2021)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[70545](#) Series

**Mates With**

SL Crimp Housing [70066](#) Option N, [70066](#) Option G, [70066](#) Option A, [70430](#) Option G, [70400](#) Option G

Voltage - Maximum 250V

**Solder Process Data**

Duration at Max. Process Temperature (seconds) 003

Lead-free Process Capability WAVE

Max. Cycles at Max. Process Temperature 003

Process Temperature max. C 260

**Material Info**

Engineering Number A-70545-0048

**Reference - Drawing Numbers**

Packaging Specification PK-70873-0014-001

Product Specification PS-70400-001, PS-70541-001

Sales Drawing SDA-70545-XXXX-001, SDA-70545-XXXX-002,

SDA-70545-XXXX-003

Test Summary TS-70541-100-001

This document was generated on 01/25/2022

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Molex](#) manufacturer:*

Other Similar products are found below :

[892-18-020-10-001101](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [009176003701906](#) [0050291907](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#)  
[609-3404](#) [61062-3](#) [622-0430](#) [622-3653LF](#) [63453-116](#) [636-1030](#) [636-1427](#) [636-3427](#) [636-4007](#) [641938-9](#) [641991-4](#) [644827-2](#) [65817-010LF](#)  
[65817-015LF](#) [65863-015LF](#) [66207-023LF](#) [67095-007LF](#) [67601157](#) [68648-049](#) [70.362.1628.0](#) [70-4210](#) [70-4226B](#) [70-4853B](#) [707-5020](#) [707-5028](#) [71.350.2428.0](#) [71918-208LF](#) [71961-016LF](#) [733-134](#) [733-162](#) [754199-000](#) [760-3052](#) [787-8014-00](#) [79531-3000](#) [FCN-360C032-B](#) [FCN-367T-T012/H](#) [FCN-723D010/2](#) [80.063.4001.1](#) [800-90-001-10-001000](#) [800-90-010-10-002000](#) [801-43-002-10-013000](#) [801-43-006-10-002000](#)